


INDUSTRIAL PRODUCT DATASHEET


Seeed Studio XIAO RA4M1

Compact, production-ready Renesas RA4M1 Cortex-M4 development board with rich peripherals and security, ideal for space-constrained and scalable applications.

SKU	UPDATED	PRICE
102010551	2026-06-29 03:34:03	\$4.90(Excl. VAT)

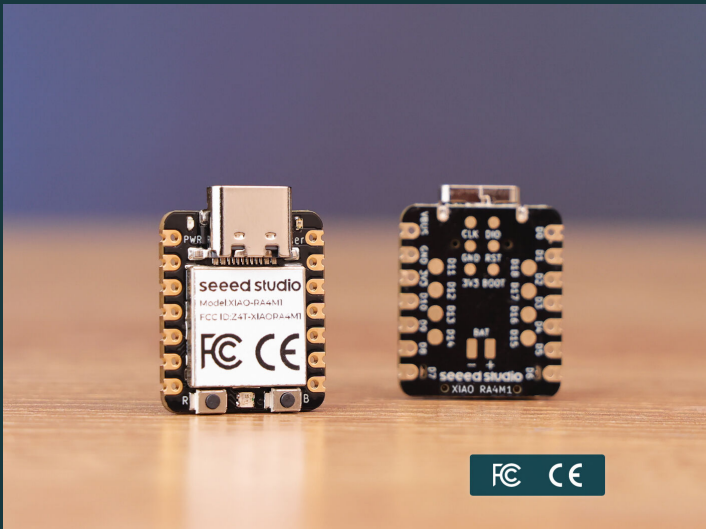

Overview

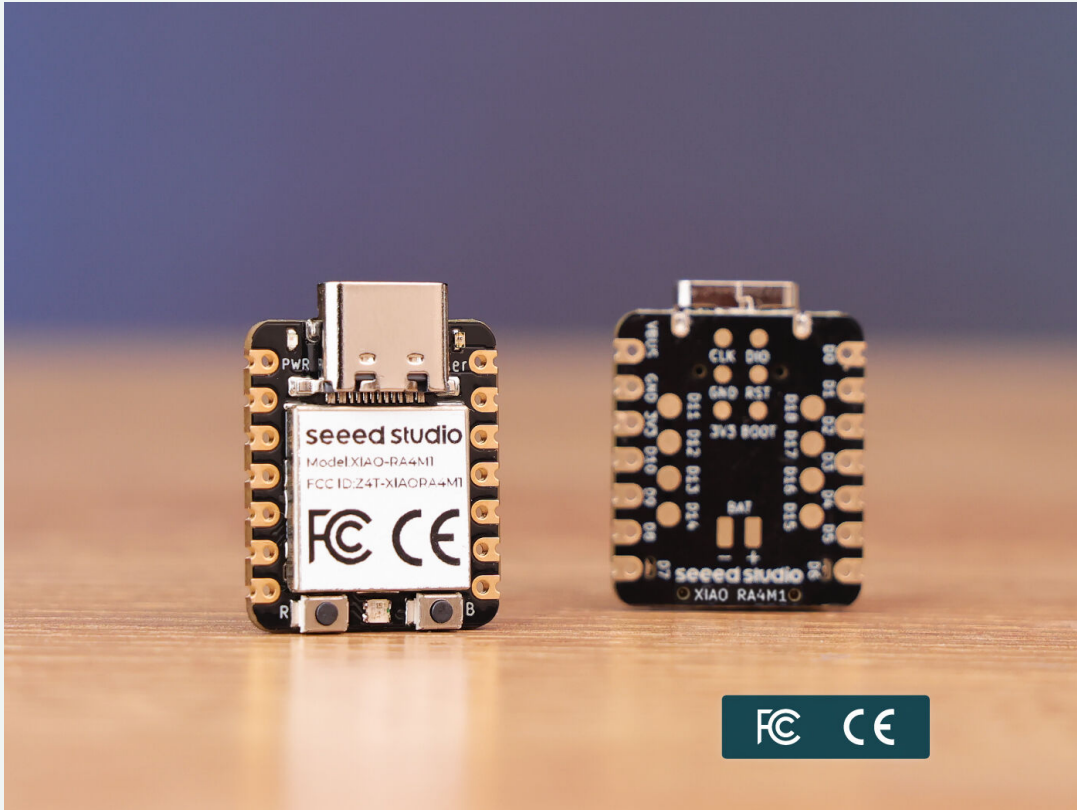

The Seeed Studio XIAO RA4M1 is a thumb-sized development board featuring a 32-bit ARM Cortex-M4 Renesas RA4M1 MCU with FPU, 256 KB Flash, 32 KB SRAM, 14-bit ADC, 12-bit DAC, USB 2.0, and 19 GPIOs, along with onboard RGB LED and hardware security. Its compact SMD design, low power consumption down to 45 μ A in deep sleep, lithium battery support, and Arduino compatibility make it ideal for wearables, robotics, smart control, and education, while also being production-ready via Fusion PCBA integration.

Key Features

- **Popular Microcontroller Onboard:** Powered by [Renesas RA4M1](#), an 32-bit ARM® Cortex®-M4 R7FA4M1AB3CNE MCU operating at up to 48 MHz with FPU, 256 KB of Flash memory, and 32 KB of SRAM.
- **Highlighted Onboard Resources:** Equipped with a 14-bit ADC, 12-bit DAC, USB 2.0, and an onboard RGB LED.
- **Expanded 8 New IOs:** Adds 8 new IO pins on the back compared to previous XIAO boards (19 GPIOs in total), enabling more complex applications.
- **Powerful Security Features:** Built-in hardware encryption, secure boot, key storage, and other functions to ensure application security.
- **Software Compatibility:** Fully compatible with Arduino IDE for seamless project development and prototyping.
- **Efficient Power Design:** Offers 4 operating modes with power consumption as low as 45µA in deep sleep, and supports lithium battery charge management.
- **Compact Thumb-Sized Design:** Measuring 21 x 17.8mm, adopting Seeed Studio's classic XIAO form factor, ideal for space-conscious applications.
- **Production-Friendly:** Surface Mount Device (SMD) design with all components on the front and stamp holes on both sides, facilitating efficient mass production.





Production-Ready Design with Fusion PCBA Support

Being the 10th member of the [Seeed Studio XIAO family](#), the XIAO RA4M1 remains the classic XIAO design (thumb-size, SMD, stamp holes). All these features make it a perfect fit for either space-limited projects such as wearables, or a production-ready module for commercial PCBA (Printed Circuit Board Assembly) integration. Through our [Fusion PCBA Sponsorship program](#), you can not only enjoy the lowest unit prices for all XIAO modules from our Fusion Open Parts Library, but also fabricate and scale your XIAO-based PCBA designs at low cost (30% off) with FREE Design for Manufacturing consulting services, streamlining your journey from prototype to production.

Note

XIAO SoM User Manual open-sources all hardware and software materials of XIAO, providing professional product design guidelines to help you accelerate ideas off the ground, streamline product design, providing a seamless experience from module selection to mass production. You can check [here](#) to see more info.

Product Gallery

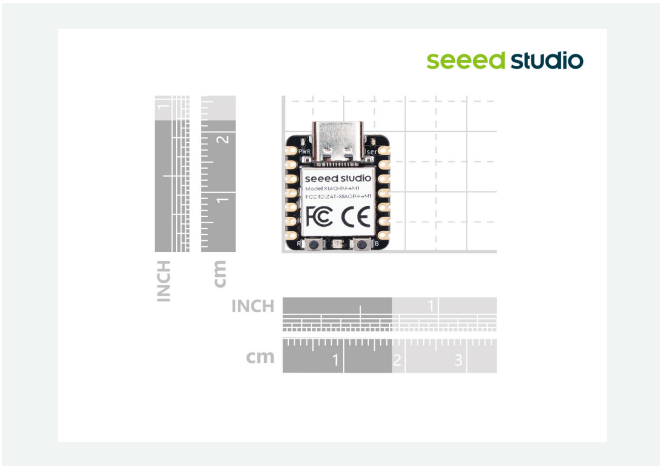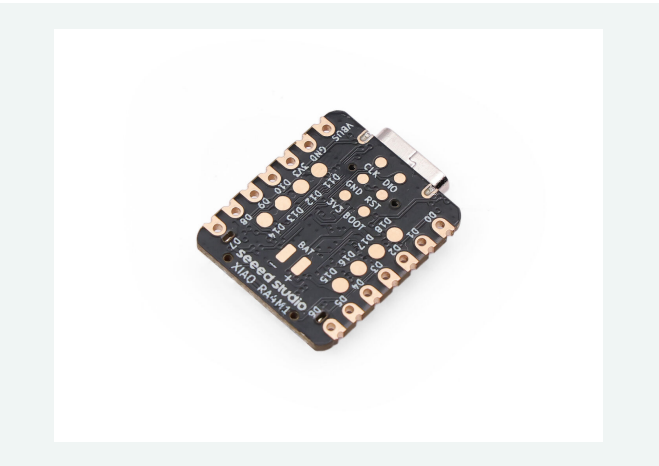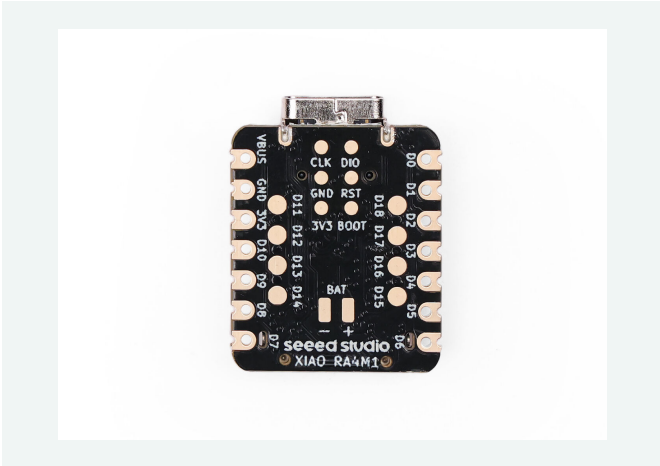
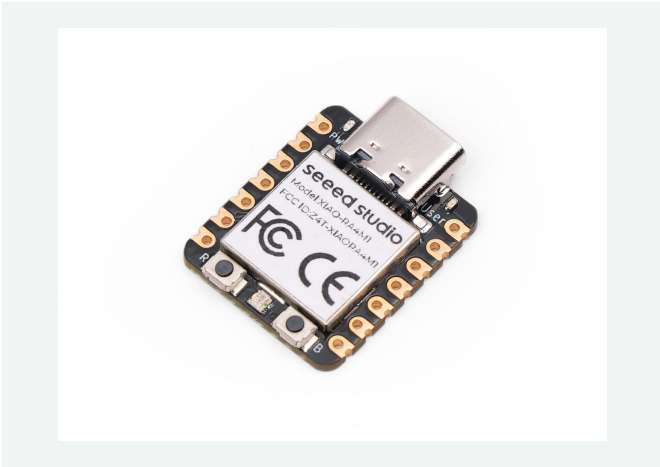


Specification

Product	XIAO RA4M1
Processor	Renesas RA4M1
	48-MHz Arm® Cortex®-M4 Core with FPU

RAM	32 KB SRAM
Flash	256 KB
LEDs	1x User LED 1x Power LED 1x RGB LED
Interfaces	19 IOs: 6x Analog 19x Digital 2x IIC 2x UART 2x SPI
Buttons	1x RESET Button 1x BOOT Button
Security	AES128/256
Low Power (Typ.)	42.6µA@3.7V
Software Compatibility	Arduino IDE
Working Temperature	-20°C~70°C
Dimensions	21x17.8 mm

Hardware Overview

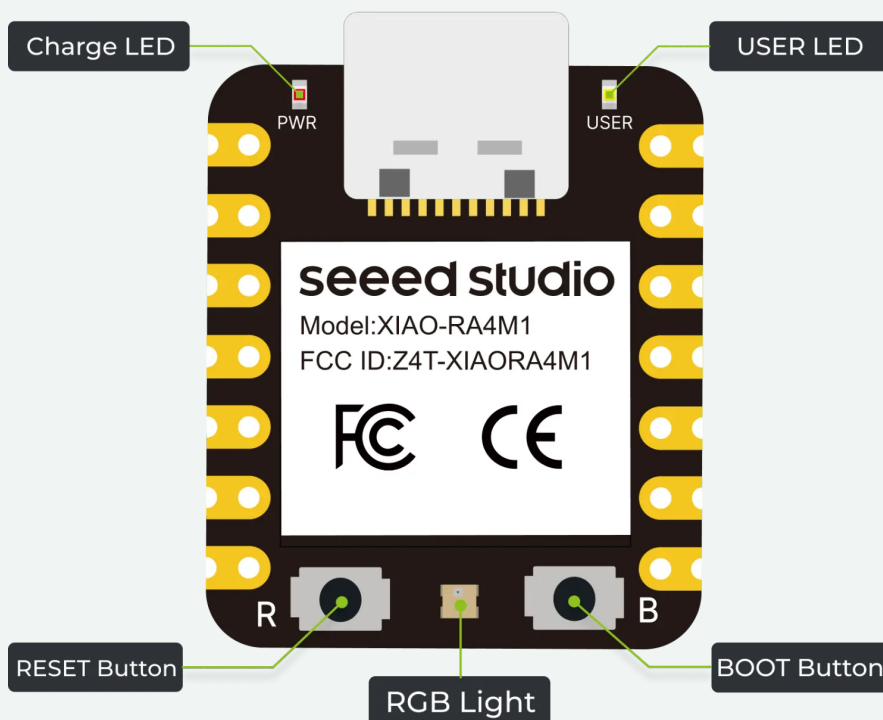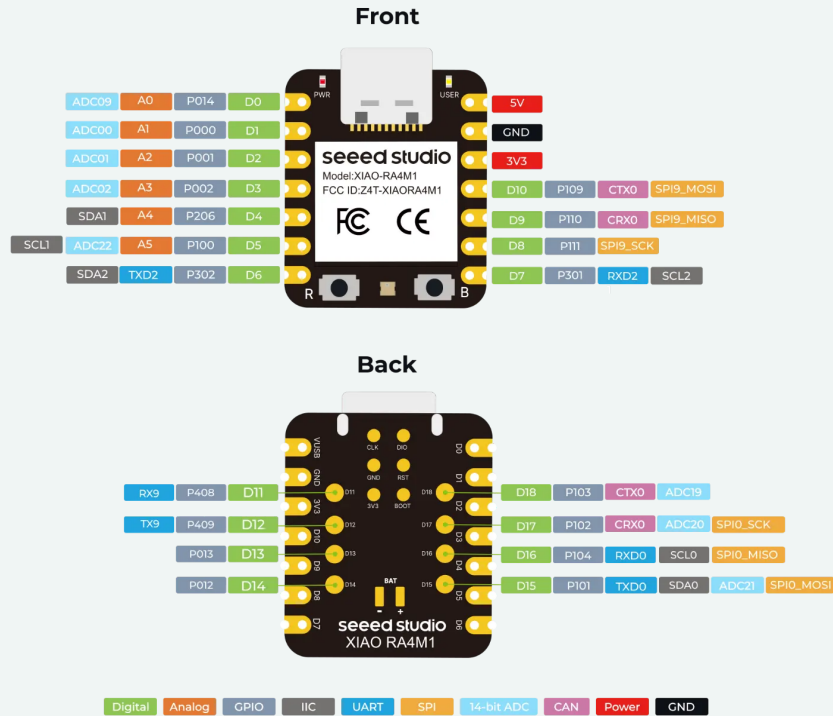

Applications

- Smart Control
- Education
- Robotics
- Wearables

Part List

Seeed Studio XIAO RA4M1	x1
7 Pin Header	x2

Compliance & Logistics



HSCODE	8543709990
USHSCODE	8517180050
UPC	
EUHSCODE	8543709099
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy.

If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/Seeed-XIAO-RA4M1-p-5943.html>
- [PCN-XIAO Series Packaging Upgrade.pdf](#)
- [Wiki-XIAO RA4M1 Resources](#)
- [Seeed Studio XIAO Use Case](#)

Seeed Technology Co.,Ltd.

9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676

Web: www.seeed.cc

Shop: www.seeedstudio.com