

钍地半导体
Tudi Semiconductor

Product Specification

TUDI-LF347

JFET-Input Quad Operational Amplifiers

网址 www.sztdbdt.com


用芯智造·卓越品质

semiconductor device manufacturer

- Design
- research and development
- production
- and sales

Features

- Low Input Bias Current: 50 pA Typical
- Low Input Noise Current: 0.01 pA/√Hz Typical
- Low Total Harmonic Distortion
- Low Supply Current: 8 mA Typical
- Gain Bandwidth: 3 MHz Typical
- High Slew Rate: 13 V/ms Typical

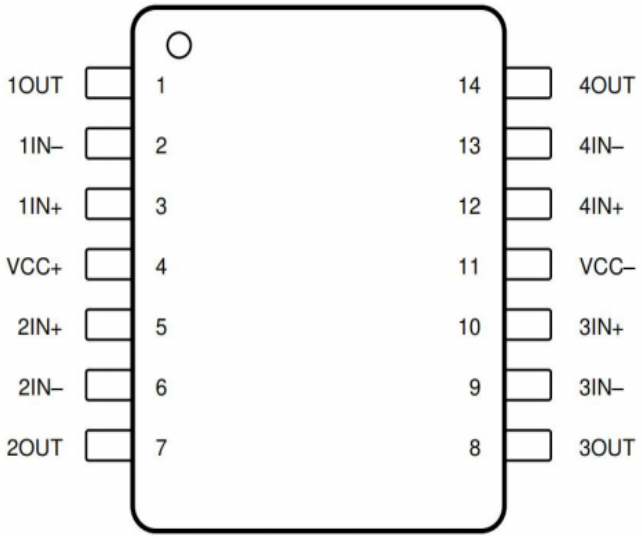

Application

- Renewables: Solar Inverters
- Motor Integrated Systems: UPS
- Drives and Control Solutions: AC Inverters and VF Dri
- Pro Audio Mixers
- Oscilloscopes


Description

The LF347 devices are low-cost, high-speed, JFET-input operational amplifiers. They require low supply current yet maintain a large gain-bandwidth product and a fast slew rate. In addition, their matched high-voltage JFET inputs provide very low input bias and offset current.
The LF347 can be used in applications such as high-speed integrators, digital-to-analog converters, sample-and-hold circuits, and many other circuits.
The LF347 devices are characterized for operation from -40°C to 85°C.

Order information

Order Number	Package	Package Quantity	Marking On The park	Temperature
LF347MX/NOPB-TUDI	SOP14	Tape,Reel,4000	LF347M	0℃ to +70℃
LF347N-TUDI	DIP14	Tube,25,A box of 1000	LF347N	
LF347BMX/NOPB-TUDI	SOP14	Tape,Reel,4000	LF347BM	-40℃ to +105℃
LF347BN-TUDI	DIP14	Tube,25,A box of 1000	LF347BN	

Functional block diagram

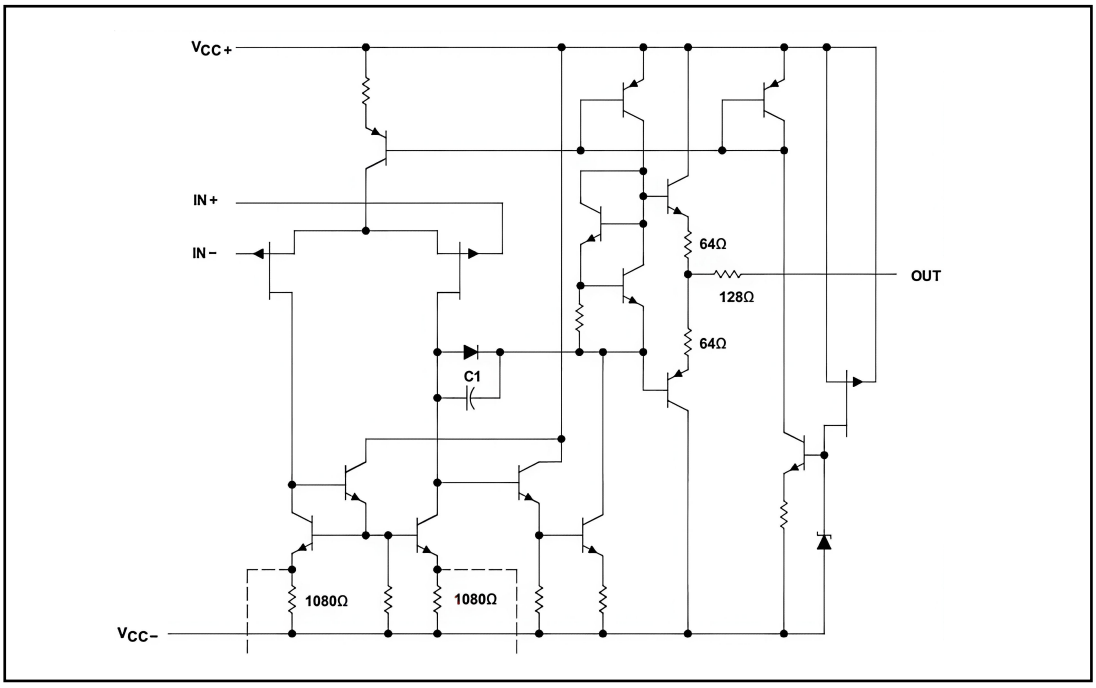

Pin description

Pin numbering	Pin Name	I/O	describe
1	10UT	O	Route 1 Op-Amp Output
2	1IN-	I	Inverting input of the first operational amplifier
3	1IN+	I	Route 1: Op-Amp Positive Input
4	V_{cc}+	P	Positive power supply
5	2IN+	I	Channel 2 Op-Amp Positive Input
6	2IN-	I	Channel 2 Op-Amp Reverse Input
7	20UT	0	Channel 2 Op-Amp Output
8	30UT	0	Route 3 Op-Amp Output
9	3IN-	I	Route 3 Op-Amp Reverse Input
10	3IN+	I	Route 3 Op-Amp Positive Input
11	V_{cc}-	P	Negative power supply
12	4IN+	I	Channel 4 Op-Amp Positive Input
13	4IN-	I	Channel 4 Op-Amp Reverse Input
14	4OUT	0	Channel 4 Op-Amp Output

Limit parameters (unless otherwise specified, TA=25°C

Parameter	Characteristic	Price
supply voltage	Vcc	±18V
Differential input voltage	ViD	±30V
input voltage	VI	±15V
Maximum operating junction temperature	Tj	150℃
operating temperature range	TA	-40～+105℃
storage temperature	Ts	-65～+150℃
Lead temperature (welding, 10 s)	Tw	260℃

Recommended operating conditions (unless otherwise specified, TA=25°C

parameter	symbol	MIN	MAX	UNIT
Positive power supply	V_{cc}+	+5	+15	V
Negative power supply	V_{cc}-	-5	-15	V
common-mode input voltage	VcM	(V_{cc}-)+4	(V_{cc}+)-4	V

Electrical characteristics (unless otherwise specified, TA=25°C

parameter	characteristic	test condition	MIN	TYP	MAX	UNIT
Power supply current (per channel)	I_{cc}	V_o=0V,R_L=∞	-	1.8	2.8	mA
Input offset voltage	V_{io}	V_o=0V	-	±2	±6	mV
input offset current	I_{io}	V_o=0V	-	±50	-	pA
input bias current	I_B	V_o=0V	-	±200	-	pA
common-mode input voltage	V_{CM}		±11	-	-	V
Output voltage amplitude	V_{OM}	R_L=10kΩ	±12	±13.5	-	V
		R_L=2kΩ	±10	±12	-	V
open loop voltage gain	A_{OL}	V_o=±10V,R_L≥2kΩ	-	100	-	V/mV
cmrr	CMRR	V_{CM}=0V,V_o=0V	80	86	-	dB
supply voltage rejection ratio	PSRR	V_{cc}=±9V to±15V	80	90	-	dB
gain bandwidth product	GBWP		-	3	-	MHz
slew rate	SR	G=+1	8	13	-	V/uS
input impedence	R_I		-	10^{12}	-	Ω

Typical application

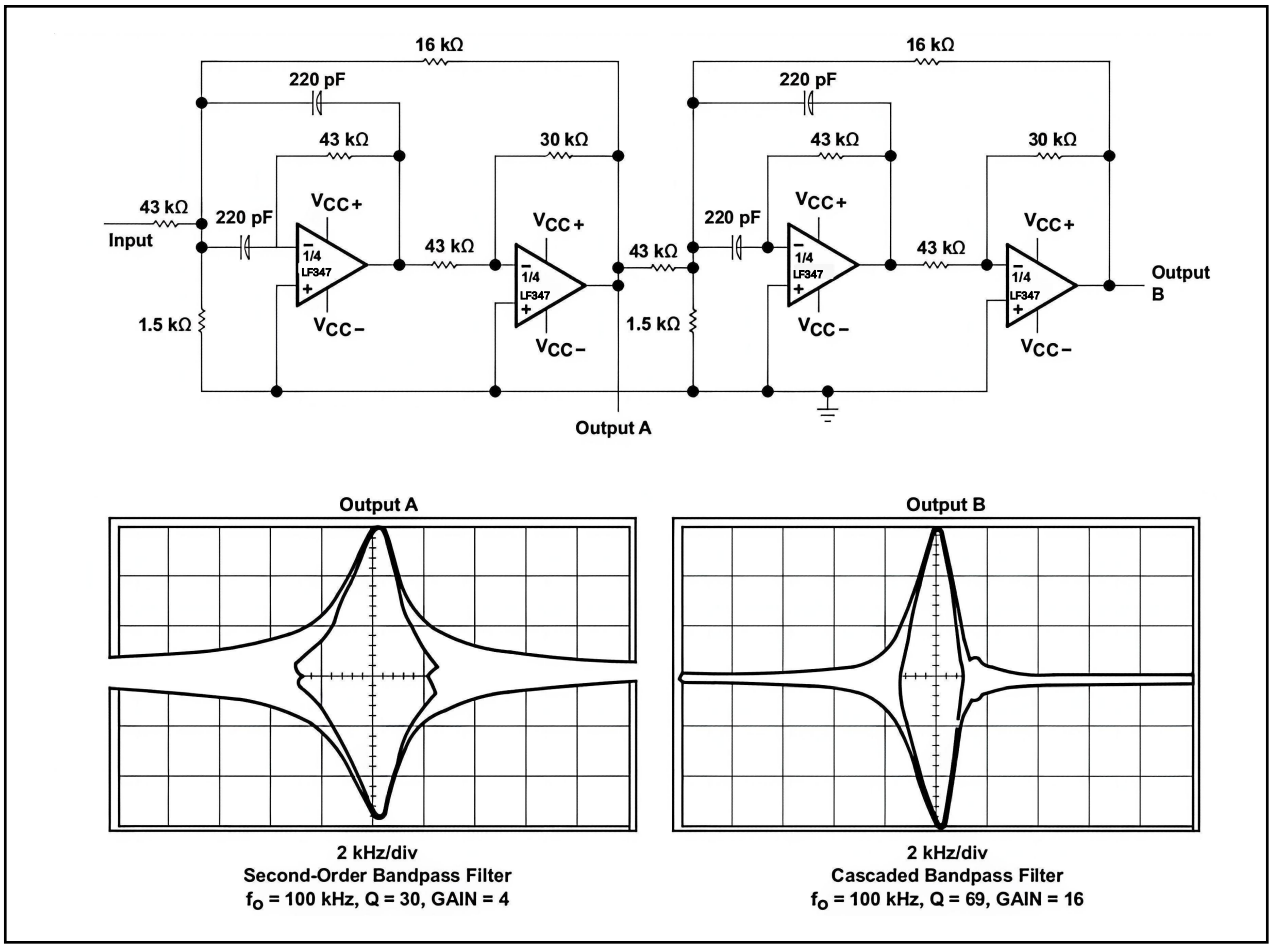


Figure 1 Positive feedback bandpass filter

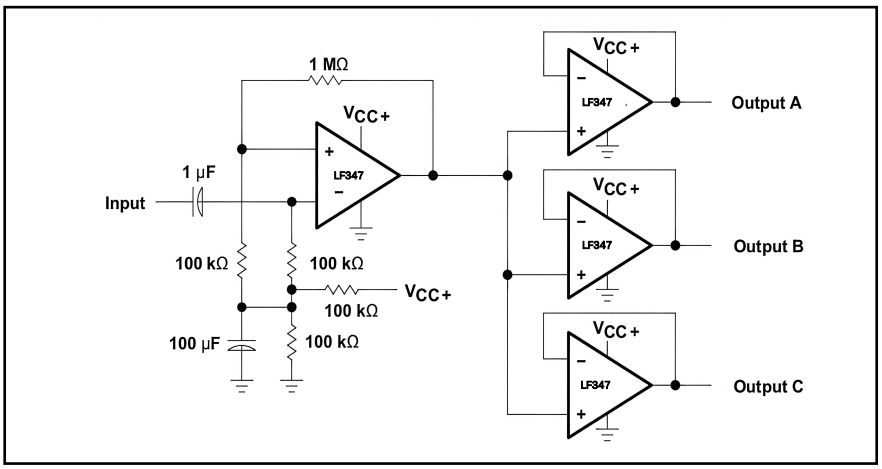


Figure 2 Audio distribution amplifier

Characteristic curve

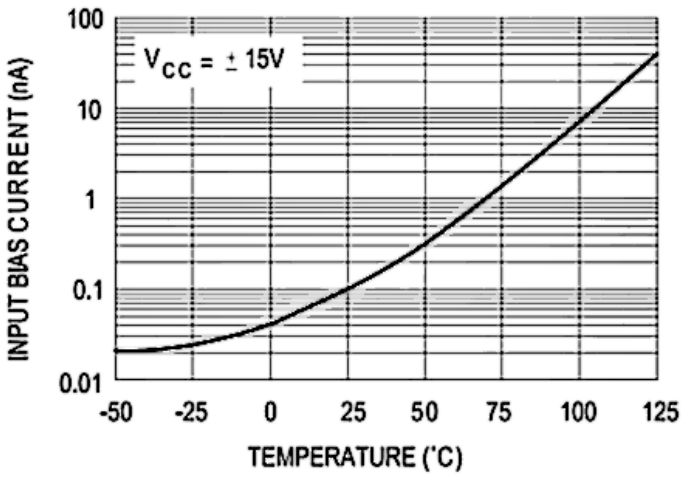


Figure 3 Relationship between input bias current and ambient temperature

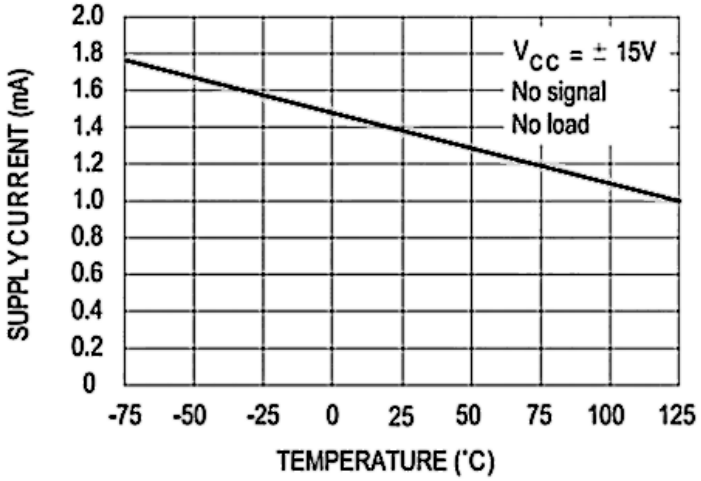


Figure 4 Power supply current vs. ambient temperature (per channel)

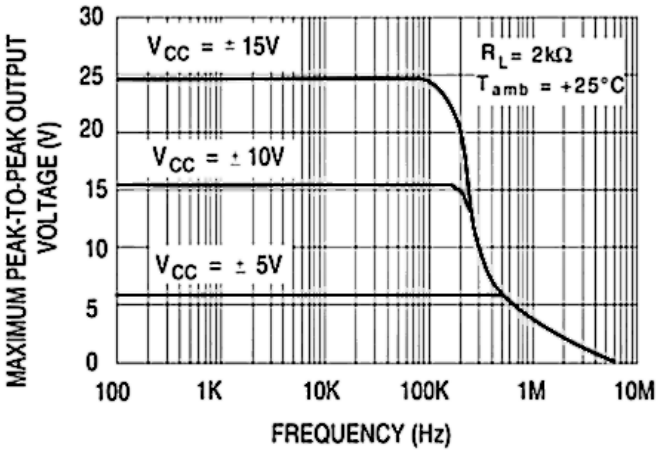


Figure 5 Relationship between maximum output voltage swing and frequency




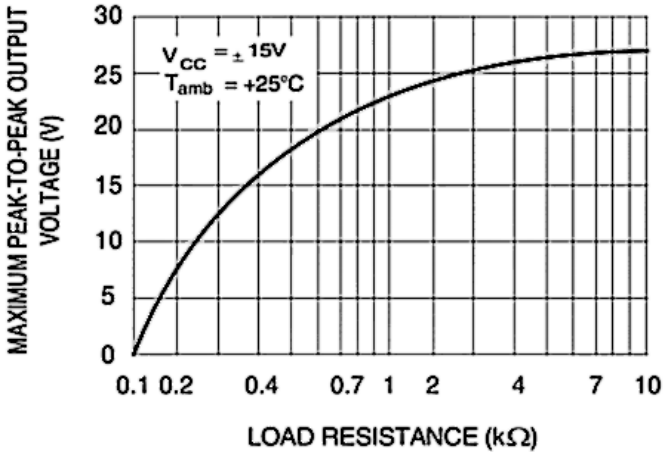



Fig. 6 Relationship between maximum output voltage swing and load

Package SOP14

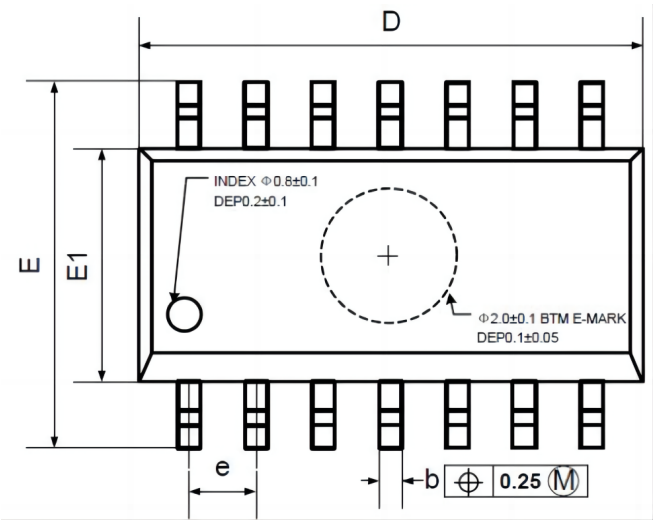

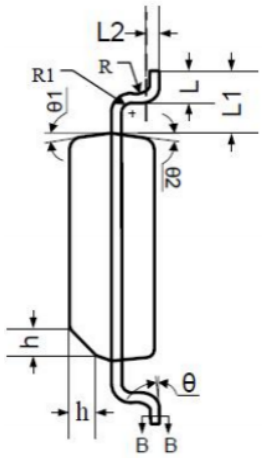


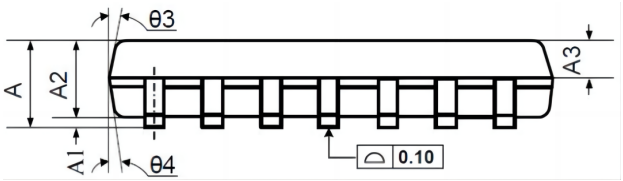


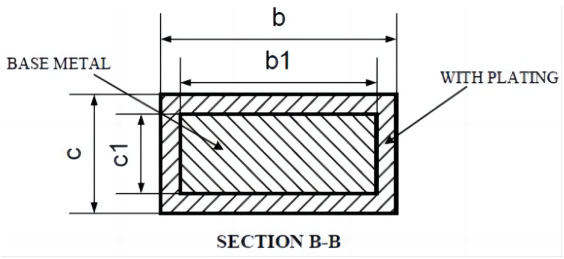


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	1.35	1.60	1.75
A1	0.10	0.15	0.25
A2	1.25	1.45	1.65
A3	0.55	0.65	0.75
b	0.36		0.49
b1	0.35	0.40	0.45
C	0.16		0.25
c1	0.15	0.20	0.25
D	8.53	8.63	8.73
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27 BSC		
L	0.45	0.60	0.80
L1	1.04 REF		
L2	0.25 BSC		
R	0.07		
R1	0.07		
h	0.30	0.40	0.50
θ	0°		8°
θ1	6°	8°	10°
θ2	6°	8°	10°
θ3	5°	7°	9°
θ4	5°	7°	9°

Package DIP14

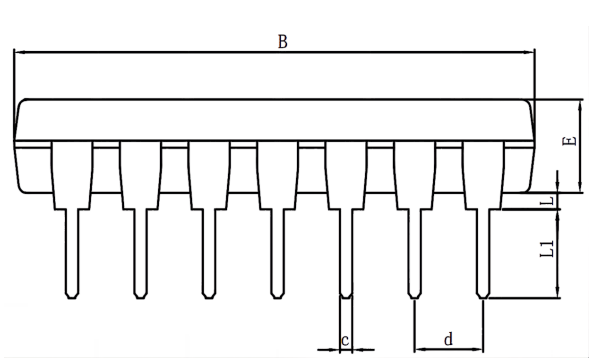

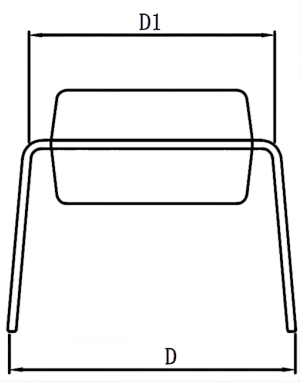

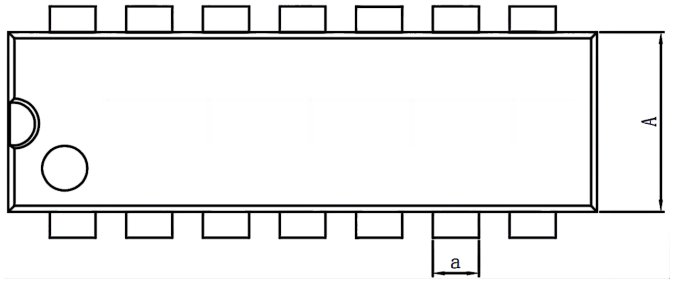

DIM.	MIN	TYP	MAX	DIM.	MIN	TYP	MAX
A	6.100	6.300	6.680	a	1.504	1.524	1.544
B	18.940	19.200	19.560	C	0.437	0.457	0.477
D	8.200	8.700	9.200	d	2.530	2.540	2.550
D1	7.42	7.62	7.82	L	0.500	—	0.800
E	3.100	3.300	3.550	L1	3.000	3.200	3.600

Important statement:

●TUDI Semiconductor reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.

●Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using TUDI Semiconductor products for system design and whole machine manufacturing.And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!

●TUDI Semiconductor products have not been licensed for life support, military, and aerospace applications,and therefore TUDI Semiconductor is not responsible for any consequences arising from the use of this product in these areas.

●If any or all TUDI Semiconductor products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.

●The specifications of any and all TUDI Semiconductor products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.

●TUDI Semiconductor documentation is only allowed to be copied without any alteration of the content and with the relevant authorization.TUDI Semiconductor assumes no responsibility or liability for altered documents.

●TUDI Semiconductor is committed to becoming the preferred semiconductor brand for customers, and TUDI Semiconductor will strive to provide customers with better performance and better quallity products.