


### Main properties

- High performance linear Strain Gage with pre-attached thin cable
- 120Ω grid for reduction of self-heating and thermal induced errors. Grid length: 125[mils]
- Strain Gage is pre-wired with 30AWG, PVC coated, color coded flat cable in 3 wire configuration 9ft
- Gage and wires standard operating temperature up to 80°C
- Easy to use packaging with engineering data
- RoHS compliance

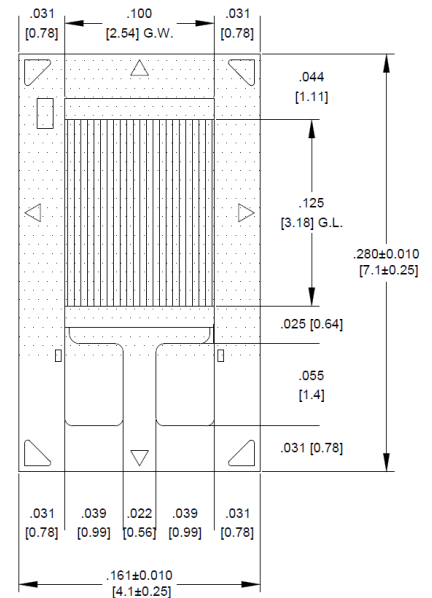

Item	Value	
Grid length	0.125" [3.2mm]	
Resistance	120±0.3%	
Gage Factor	2.07	
Transverse Sensitivity	0.53%	
Operating Temperature	Up to 80°C	
Gage Structure	Backing	Polyimide, 20µm
	Resistive Foil	Constantan
	Encapsulation	Polyimide*
Thermal performance coefficients on package, per gage lot		

\*As a standard, where applicable

\*\* GF and TS values are for A83 ingot, for other ingots slight variations are possible, indicated on package


### Wires

- Flat cable of 30AWG wires, PVC insulated, thin and flexible for easy handling
- Stripped and tinned at ends for easy integration directly to DAQ terminals
- Operating temperature up to 80 °C
- Color coding:

Grid 1		
Pad A	Pad A	Pad B
Black wire	White Wire	Red Wire

For technical questions, contact [mm.as@vpgsensors.com](mailto:mm.as@vpgsensors.com)

LTR	REVISION	ERN	INITIAL	DATE
~			OS	2018-02-28

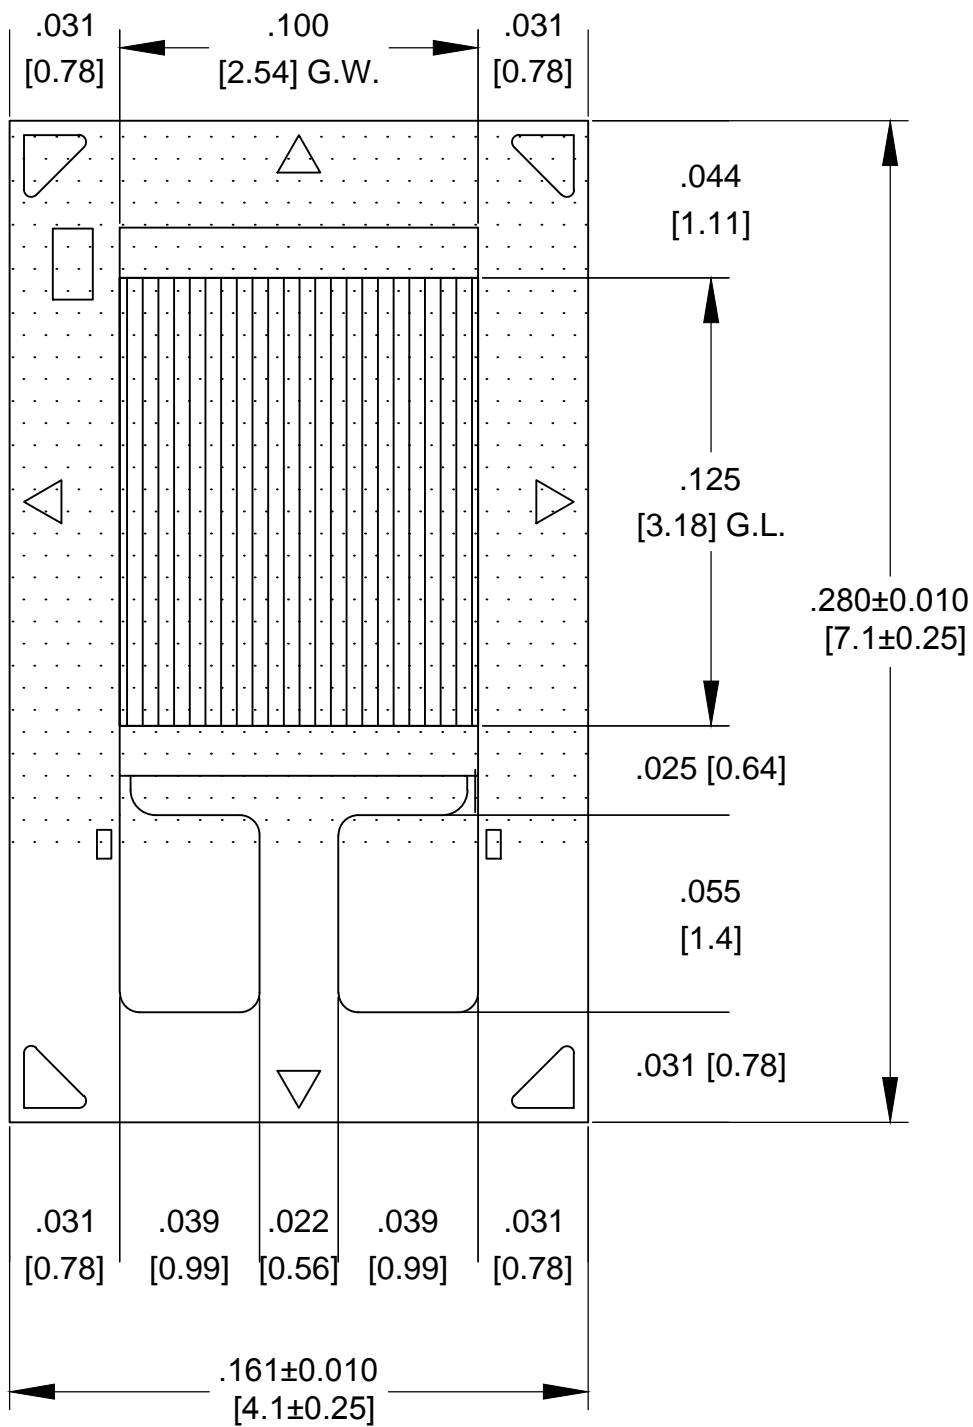

DIMENSIONS TOLERANCE IS ±.0025 [±0.06]

THESE DRAWINGS/SPECIFICATIONS ARE THE EXCLUSIVE PROPERTY OF MICRO-MEASUREMENTS. THEY SHALL NOT BE REPRODUCED OR COMMUNICATED TO OTHERS, IN WHOLE OR IN PART, NOR BE USED AS A BASIS FOR MANUFACTURE OR SALE OF THE ITEMS REPRESENTED, WITHOUT THE WRITTEN PERMISSION OF MICRO-MEASUREMENTS.



Micro-Measurements  
Raleigh, North Carolina USA



## 125SL PATTERN LAYOUT

CONSTRUCTION:

C4A

OPTIONS:

RESISTANCE:

350±0.3%  
120±0.3%

REFERENCE:

DRAWN BY:

OS

PROJ. ENG.

AH

DATE:

2018-02-28

DATE:

2018-02-28

SCALE:

N.T.S.

DWG. #

MS-125SL-10520

ALL DIMENSIONS ARE IN INCHES

[mm].

REVISION:

~

# Advanced Sensors 'C4A Series' Packaging

1. Micro-Measurements Advanced Sensors C4A Strain Gages are packaged in a rugged carton box for product protection and ease of usage:



Engineering data is on the backside label

2. Standard package includes 10 gages per box, each gage is packaged in an individual Anti-Static bag:



3. Gage is protected within an Acetate folder. Wire is winded into a coil and binded with a tie twist for easy wire handling:



For technical questions, contact [mm@vpgsensors.com](mailto:mm@vpgsensors.com)