



UTT6NP10

Power MOSFET

DUAL ENHANCEMENT MODE (N-CHANNEL/P-CHANNEL)

■ DESCRIPTION



The UTC **UTT6NP10** incorporates an N-channel MOSFET and a P-channel MOSFET, it uses UTC's advanced technology to provide customers a minimum on-state resistance and high-speed switching, thereby enabling high-density mounting.

The UTC **UTT6NP10** is universally applied in high-speed switching, motor driver.

■ FEATURES

- * $R_{DS(on)} < 150m\Omega @ V_{GS} = 10V, I_D = 2A$
- $R_{DS(on)} < 250m\Omega @ V_{GS} = 5V, I_D = 1A$
- * $R_{DS(on)} < 155m\Omega @ V_{GS} = -10V, I_D = -2A$
- $R_{DS(on)} < 250m\Omega @ V_{GS} = -5V, I_D = -1A$
- * High switching speed

■ SYMBOL

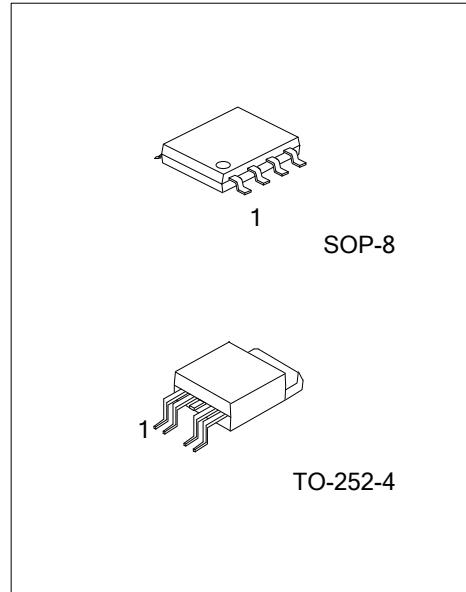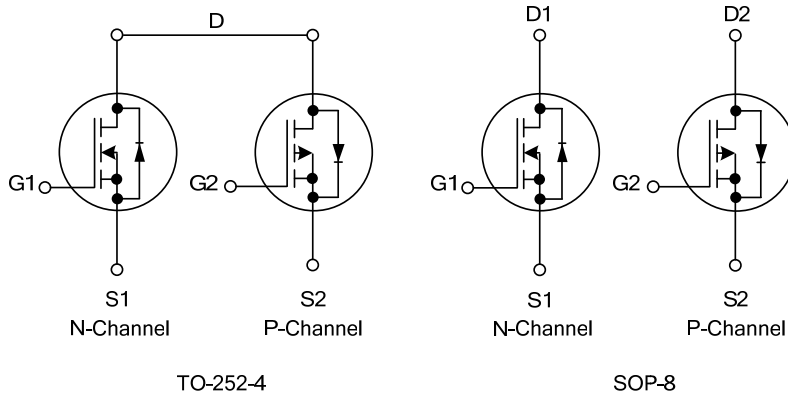


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment								Packing
Lead Free	Halogen Free		1	2	3	4	5	6	7	8	
UTT6NP10L-TN4-R	UTT6NP10G- TN4-R	TO-252-4	S1	G1	D	S2	G2	-	-	-	Tape Reel
UTT6NP10L- S08-R	UTT6NP10G- S08-R	SOP-8	S1	G1	S2	G2	D2	D2	D1	D1	Tape Reel


Note: Pin Assignel: G: Gate D: Drain S: Source

<p>UTT6NP10G-TN4-R</p> <p>(1)Packing Type</p> <p>(2)Package Type</p> <p>(3)Green Package</p>	<p>(1) R: Tape Reel</p> <p>(2) TN4: TO-252-4, S08: SOP-8</p> <p>(3) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---


MARKING

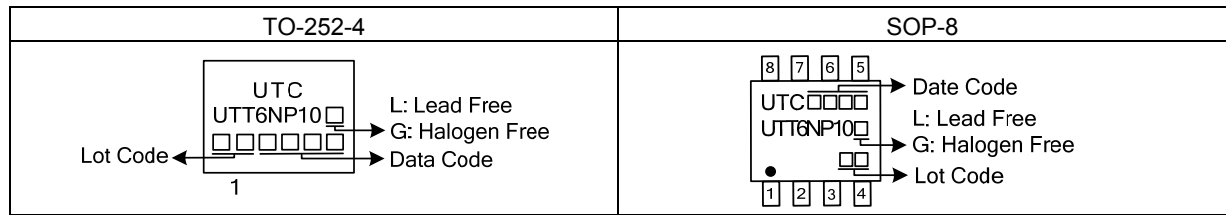

PIN CONFIGURATION

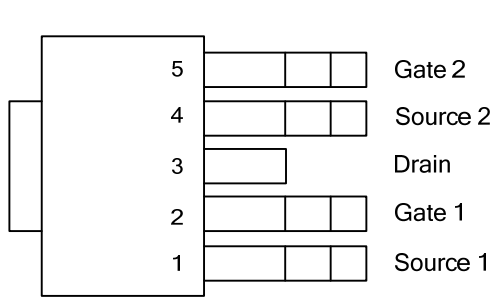

TO-252-4

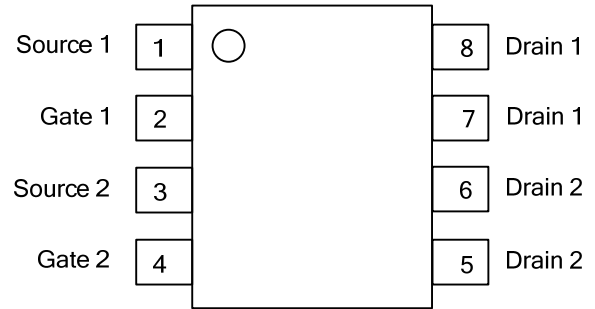

SOP-8

■ ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS		UNIT
				N-CHANNEL	P-CHANNEL	
Drain-Source Voltage			V_{DSS}	100	-100	V
Gate-Source Voltage			V_{GSS}	± 20	± 20	V
Drain Current	Continuous (Note 3)	$T_A=25^{\circ}\text{C}$	I_D	3.1	-3.2	A
		$T_A=70^{\circ}\text{C}$		2.5	-2.5	A
	Pulsed (Note 1)		I_{DM}	12.4	-12.8	A
Power Dissipation ($T_A=25^{\circ}\text{C}$)			P_D	3.1		W
				2		W
Junction Temperature			T_J	-55~+150		$^{\circ}\text{C}$
Storage Temperature Range			T_{STG}	-55~+150		$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-252-4			
	SOP-8	62.5	$^{\circ}\text{C/W}$	

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

N-channel

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	$I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$	100			V
Drain-Source Leakage Current		I_{DSS}	$V_{DS}=80\text{V}$, $V_{GS}=0\text{V}$			10	μA
Gate-Source Leakage Current	Forward	I_{GSS}	$V_{GS}=+20\text{V}$			+100	nA
	Reverse		$V_{GS}=-20\text{V}$			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$	1		3	V
Static Drain-Source On-State Resistance (Note 2)		$R_{DS(ON)}$	$V_{GS}=10\text{V}$, $I_D=2\text{A}$			150	m Ω
			$V_{GS}=5\text{V}$, $I_D=1\text{A}$			250	m Ω
DYNAMIC PARAMETERS							
Input Capacitance		C_{ISS}	$V_{GS}=0\text{V}$, $V_{DS}=25\text{V}$, $f=1.0\text{MHz}$		530		pF
Output Capacitance		C_{OSS}			45		pF
Reverse Transfer Capacitance		C_{RSS}			35		pF
SWITCHING PARAMETERS							
Total Gate Charge (Note 2)		Q_G	$V_{GS}=10\text{V}$, $V_{DS}=80\text{V}$, $I_D=3.1\text{A}$		95		nC
Gate to Source Charge		Q_{GS}			3.2		nC
Gate to Drain Charge		Q_{GD}			3		nC
Turn-ON Delay Time (Note 2)		$t_{D(ON)}$	$V_{DS}=50\text{V}$, $I_D=3.1\text{A}$ $V_{GS}=10\text{V}$, $R_G=3.3\Omega$		40		ns
Rise Time		t_R			30		ns
Turn-OFF Delay Time		$t_{D(OFF)}$			150		ns
Fall-Time		t_F			45		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Drain-Source Diode Forward Voltage(Note 2)		V_{SD}	$I_S=3.1\text{A}$, $V_{GS}=0\text{V}$			1.3	V



■ ELECTRICAL CHARACTERISTICS(Cont.)

P-Channel

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=-250\mu A, V_{GS}=0V$	-100			V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=-80V, V_{GS}=0V$			-10	μA
Gate-Source Leakage Current	Forward	$V_{GS}=+20V, V_{GS}=0V$			+100	nA
	Reverse	$V_{GS}=-20V, V_{GS}=0V$			-100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1		-3	V
Static Drain-Source On-State Resistance (Note 2)	$R_{DS(ON)}$	$V_{GS}=-10V, I_D=-2A$			155	m Ω
		$V_{GS}=-5V, I_D=-1A$			250	m Ω
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{GS}=0V, V_{DS}=-25V, f=1.0MHz$		1400	2240	pF
Output Capacitance	C_{OSS}			110		pF
Reverse Transfer Capacitance	C_{RSS}			70		pF
SWITCHING PARAMETERS						
Total Gate Charge (Note 2)	Q_G	$V_{GS}=-10V, V_{DS}=-80V, I_D=-3.2A$		140		nC
Gate to Source Charge	Q_{GS}			7		nC
Gate to Drain Charge	Q_{GD}			6		nC
Turn-ON Delay Time (Note 2)	$t_{D(ON)}$	$V_{DS}=-50V, I_D=-3.2A$ $V_{GS}=-10V, R_G=3.3\Omega$		46		ns
Rise Time	t_R			51		ns
Turn-OFF Delay Time	$t_{D(OFF)}$			300		ns
Fall-Time	t_F			250		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source Diode Forward Voltage(Note 2)	V_{SD}	$I_S=-3.2A, V_{GS}=0V$			-1.3	V





- Notes: 1. Pulse Test: Pulse width limited by Max. junction temperature.
 2. N-CH, P-CH are same, mounted on 2oz FR4 board $t \leq 10s$.

■ TEST CIRCUITS AND WAVEFORMS

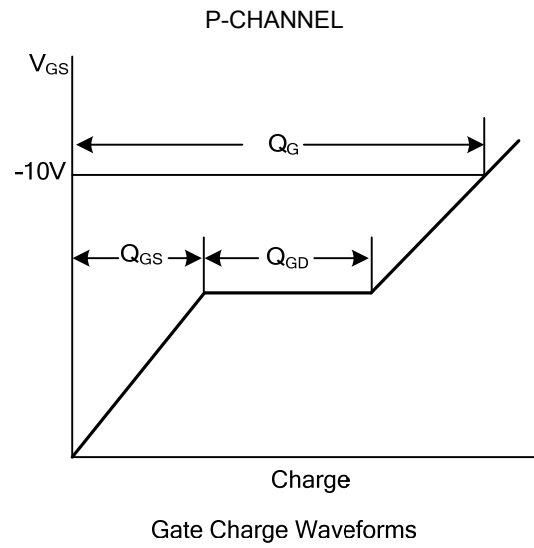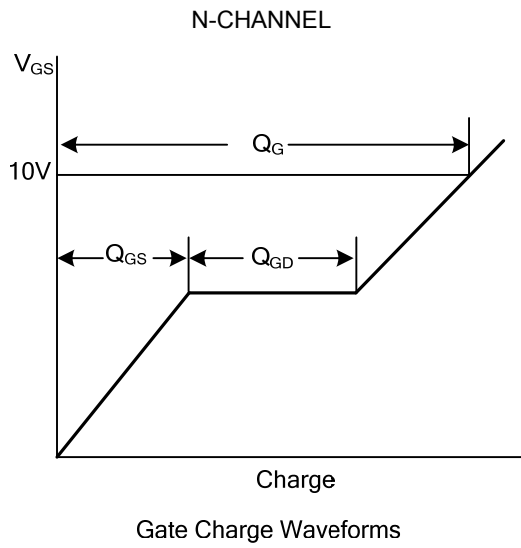





■ TYPICAL CHARACTERISTICS

N-channel

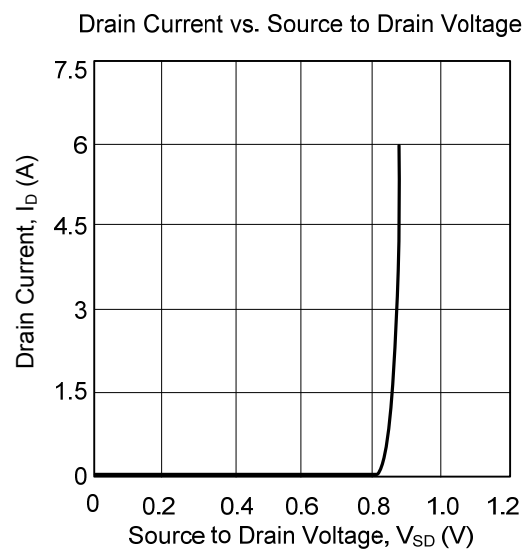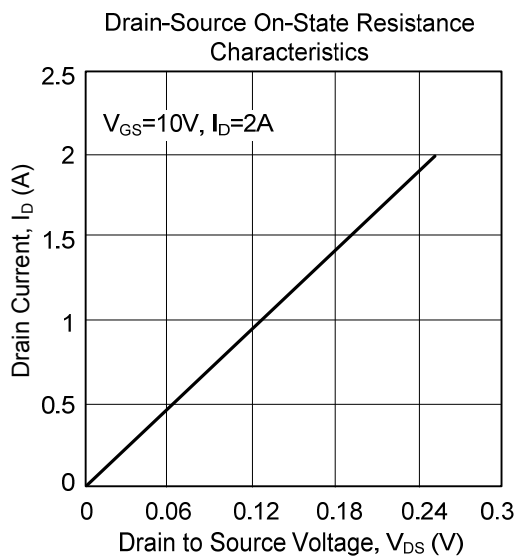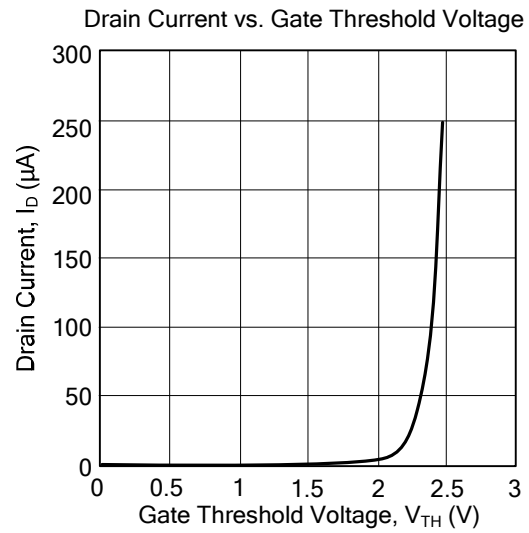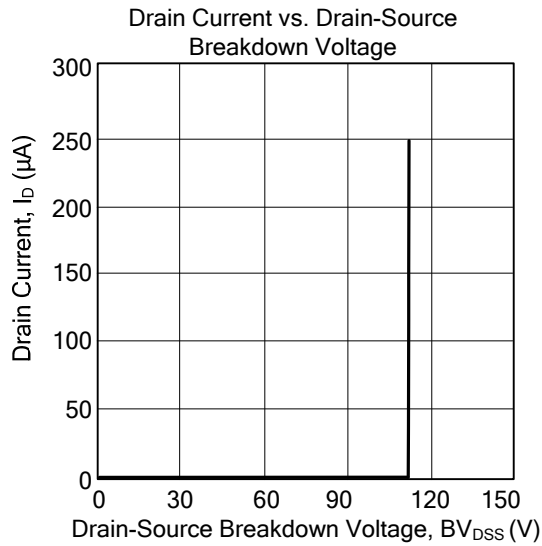

■ TYPICAL CHARACTERISTICS(Cont.)

P-channel

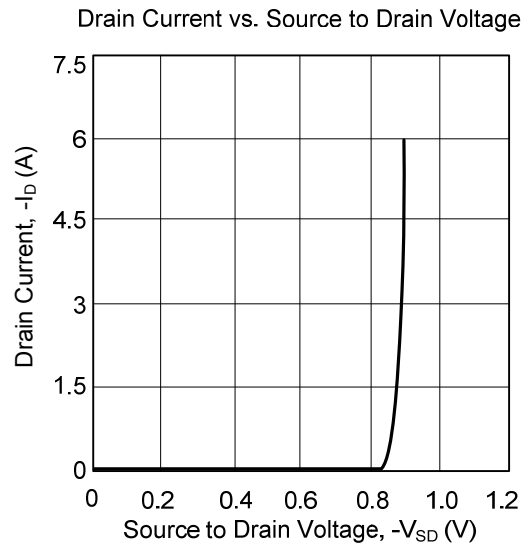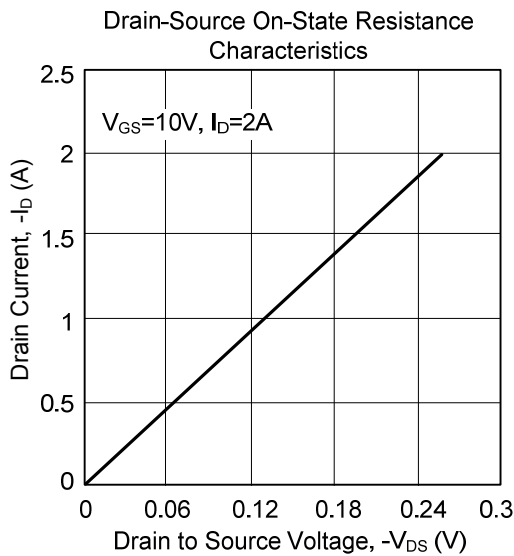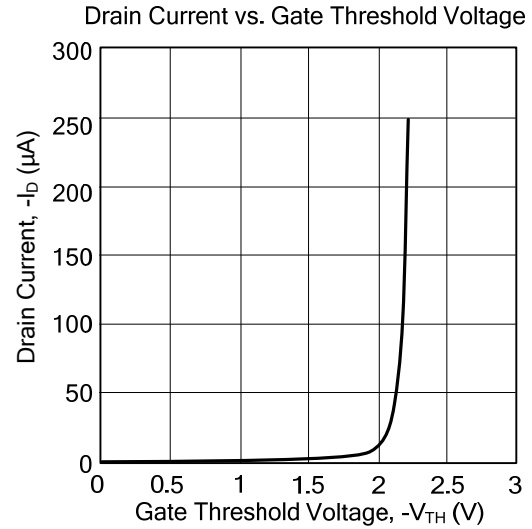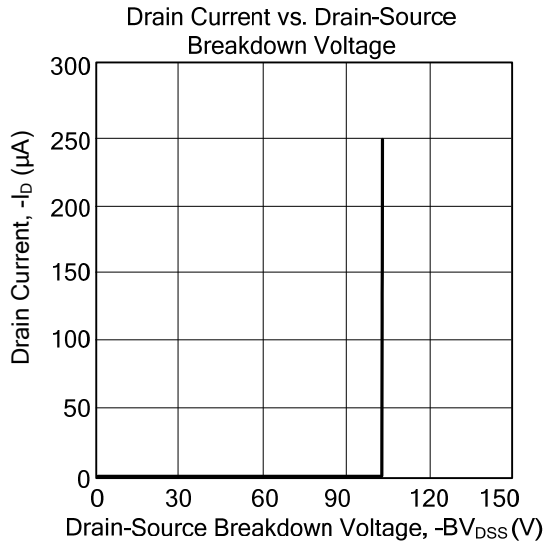

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.