



MB2S thru MB10S


Miniautre Glass Passivated Single-Phase Surface Mount Bridge Rectifier
Reverse Voltage 200 to 1000 Volts Forward Current 0.5 Ampere

Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating:35A peak
- ◆ Saves space on printed circuit boards
- ◆ High temperature soldering guaranteed:260°C/10 seconds
- ◆ Add suffix "E" for Halogen Free
- ◆ Halogen-free according to IEC 61249-2-21 definition

Mechanical Data

- ◆ Case:Molded plastic body over passivated junctions
- ◆ Terminals: plated leads solderable per MIL-STD-750, Method 2026
- ◆ Mounting Position:Any
- ◆ Weight:0.078 oz.,0.22g

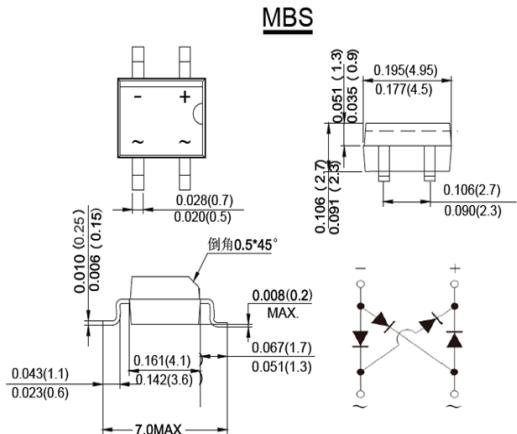

Maximum Ratings & Electrical Characteristics

(T_A=25°C unless otherwise noted)

Parameter	Symbol	MB2S	MB4S	MB6S	MB8S	MB10S	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	200	400	600	800	1000	V
Maximum Average forward output current (see Fig.1) on glass-epoxy P.C.B on aluminum substrate	I _{F(AV)}			0.5 ⁽¹⁾ 0.8 ⁽²⁾			A
Peak forward surge current 8.3 MS single HALF sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}			35			A
Rating for fusig (t<8.3ms)	I ² t			5			A ² sec
Maximum instantaneous forward voltage drop per leg at 0.4A	V _F			1.00			V
Maximum DC reverse current at TA=25°C rated DC blocking voltage per leg TA=125°C	I _R			5 100			µA
Typical thermal resistance per leg	R _{θJA} R _{θJA} R _{θJL}			85 ⁽¹⁾ 70 ⁽²⁾ 20 ⁽¹⁾			°C/W
Typical junction capacitance per at 4.0V,1.0MHz	C _j			13			pF
Operating junction and storage temperature range	T _{J,T_{STG}}			-55 to +150			°C

Notes: 1. On glass epoxy P.C.B. mounted on 0.05×0.05"(1.3×1.3mm) pads

2. On aluminum substrate P.C.B. whth an area of 0.8×0.8" (20×20mm) mounted on 0.05×0.05"(1.3×1.3mm) solder pad



MB2S thru MB10S

Miniautre Glass Passivated Single-Phase Surface Mount Bridge Rectifier
Reverse Voltage 200 to 1000 Volts Forward Current 0.5 Ampere

Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

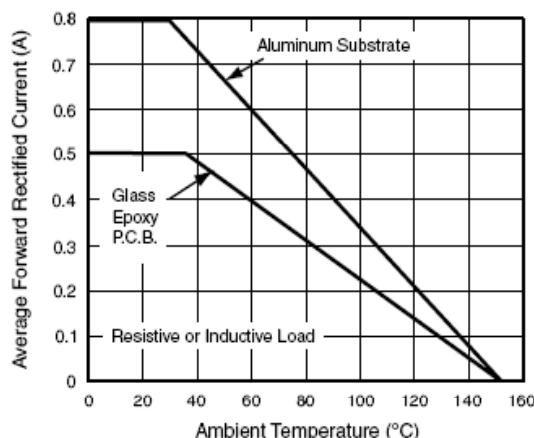


Figure 1.Derating Curve for Output Rectified Current

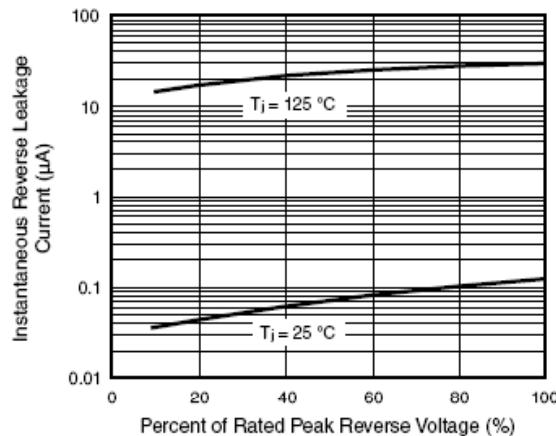


Figure 4.Typical Reverse Leakage Characteristics Per Leg

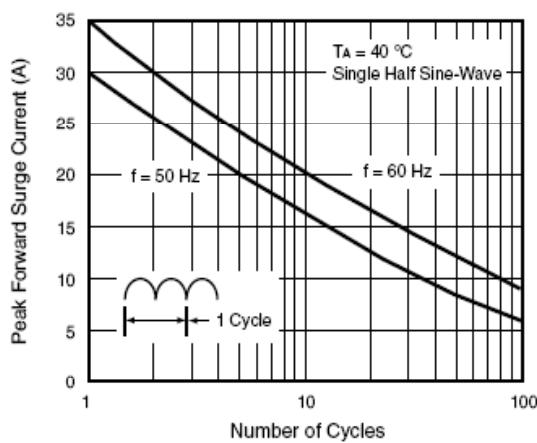


Figure 2.Maximum Non-Repetitive Peak Forward Surge Current Per Leg

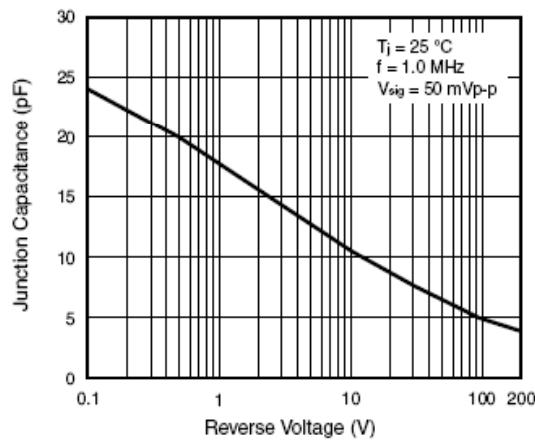


Figure 5.Typical Junction Capacitance Per Leg

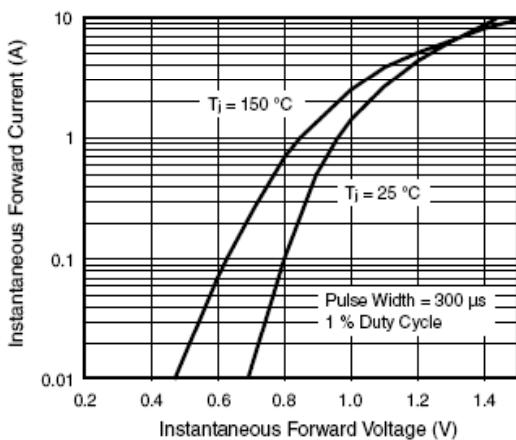


Figure 3.Typical Forward Voltage Characteristics Per Leg




MB2S thru MB10S

Miniautre Glass Passivated Single-Phase Surface Mount Bridge Rectifier
Reverse Voltage 200 to 1000 Volts Forward Current 0.5 Ampere

Marking

印字规范:

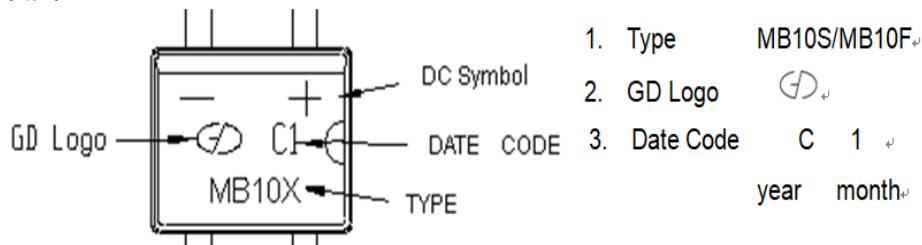

1. Type MB10S/MB10F

2. GD Logo G

3. Date Code C 1

year month

年份码:

2012	2013	2014	2015	2016	2017	2018	2019
C	D	E	F	G	H	J	K

月份码:

1月	2月	3月	4月	5月	6月	7月	8月	9月	10月	11月	12月
1	2	3	4	5	6	7	8	9	O	N	D