DORABO®

Cixi Dibo Electronics Co.,LTD

产品规格书
product specification

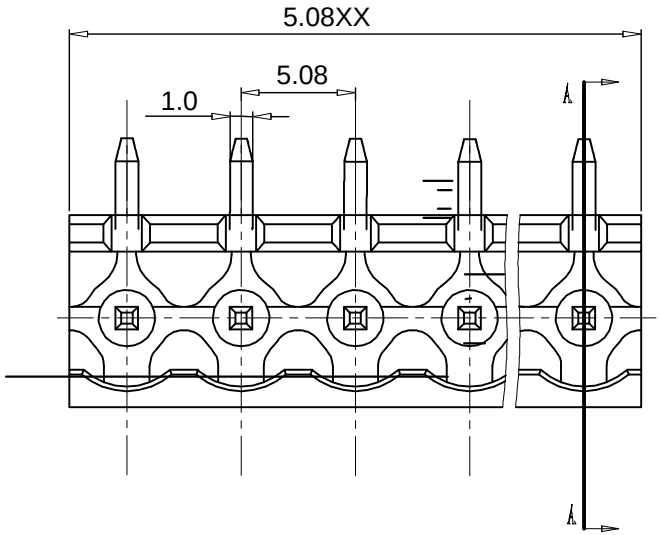

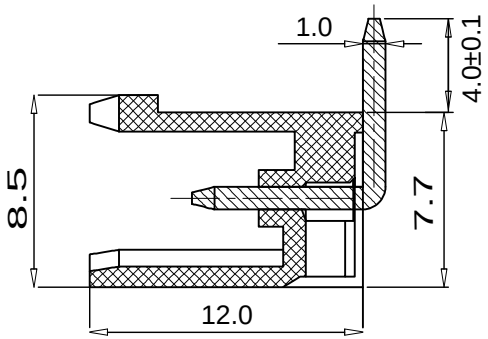

SECTION A–A

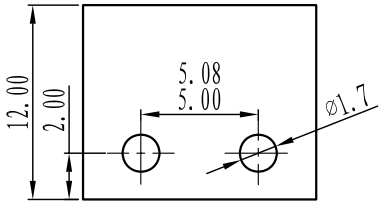

电 气 性 能/Electrical

参考标准/Standard: UL IEC
额定电压/Rated voltage: 300V 320V
额定电流/Rated current: 15A 20A
接触电阻/Contact resistance: 20mΩ
耐电压/Withstanding voltage: AC2000V/1Min
绝缘电阻/Insulation resistance: 500MΩ/DC500V

机 械 性 能/Mechanical

温度范围/Temp.Range: -40° C~+105° C
瞬间温度/MAX Soldeting: +250° C, for 5 Sec

尺 寸/Dimensions

间 距/Pitch: 5.00mm, 5.08mm
极 数/Poles: 2P-24P

材 质 及 电 镀/Material

塑 件/Housing: PA66, UL94V-0
焊 针/Pin header: Brass, Tin plated

订 购 方 式 :
HOW TO ORDER

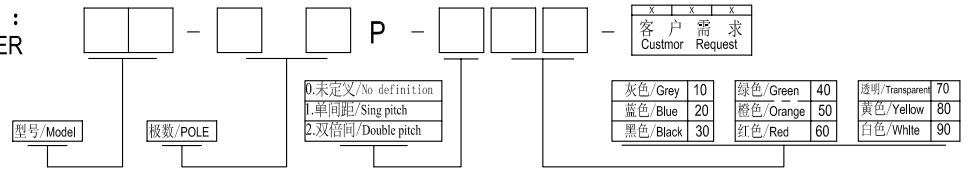

TOLERANCES EXCEPT AS NOTED

	linear dimension					fillet	chamfer		short angle sid					—	▱	//	⊥
variable range	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to	all	to 6	over 6 to	to 10	over 10 to 50	over 50 to 120	over 120 to	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	
Cixi Dibo Electronics Co.,LTD				名称/NAME	DB2ER-5.08-XXP-F

第一视角/FIRST ANGLE PROJECTION