

Common mode filters **Automotive signal line (for infotainment) ACM** series









ACM2012 type














FEATURES

- \bigcirc Highly reliable with a temperature range of -40 to +105°C.
- O Impedance variation: Extensive lineup are available for compatibility with various usages
- Ocommon mode EMI measure: Possible to suppress waveform common mode EMI without straining the waveform.
- Operating temperature range: -40 to +105°C
- Ocompliant with AEC-Q200

APPLICATION

- Radiated noise suppression for car multimedia interfaces (MOST, USB2.0, IDB-1394, etc.).
- O Application guides: Car Infotainment

PART NUMBER CONSTRUCTION



■ CHARACTERISTICS SPECIFICATION TABLE

| Common m | ode impedance | DC resistance | Rated current | Rated voltage | Part No. |
|------------------|------------------|------------------|---------------|---------------|---------------------|
| [100MHz]* | | [1 line] | | | |
| (Ω)min. | (Ω)typ. | (Ω)max. | (mA)max. | (V)max. | |
| 65 | 90 | 0.19 | 400 | 50 | ACM2012-900-2P-T001 |
| 90 | 120 | 0.22 | 370 | 50 | ACM2012-121-2P-T001 |
| 150 | 200 | 0.25 | 350 | 50 | ACM2012-201-2P-T001 |
| 270 | 360 | 0.50 | 220 | 50 | ACM2012-361-2P-T001 |
| 510 | 680 | 1.3 | 200 | 50 | ACM2012-681-2P-T001 |
| 750 | 1000 | 1.5 | 190 | 50 | ACM2012-102-2P-T001 |
| 1500 | 2200 | 2.5 | 150 | 50 | ACM2012-222-2P-T001 |

[·] Operating temperature range: -40 to +105°C

Measurement equipment

| Measurement item | Product No. Manufacturer | |
|-----------------------|--------------------------|-----------------------|
| Common mode impedance | 4991A | Keysight Technologies |
| DC resistance | 4338A | Keysight Technologies |
| Insulation resistance | 4339A | Keysight Technologies |

^{*} Equivalent measurement equipment may be used.








ACM2012 type

IMPEDANCE VS. FREQUENCY CHARACTERISTICS

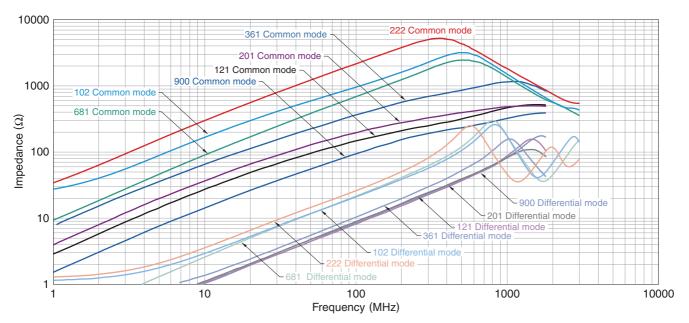


Measurement equipment

| Product No. | Manufacturer |
|-------------|-----------------------|
| 4991A | Keysight Technologies |

^{*} Equivalent measurement equipment may be used.


ACM2012 type

SHAPE & DIMENSIONS




Dimensions in mm

■ RECOMMENDED LAND PATTERN




Dimensions in mm

CIRCUIT DIAGRAM




■ RECOMMENDED REFLOW PROFILE




■PACKAGING STYLE

REEL DIMENSIONS




Dimensions in mm

TAPE DIMENSIONS



Dimensions in mm

| Type | Α | В | K |
|---------|---------|----------|---------|
| ACM2012 | 1.4±0.1 | 2.25±0.1 | 1.4±0.1 |



Dimensions in mm

□PACKAGE QUANTITY

| Package quantity | 2,000 pcs/reel |
|------------------|----------------|
| | |

■TEMPERATURE RANGE, INDIVIDUAL WEIGHT

| Operating temperature range | Storage temperature range* | Individual weight |
|-----------------------------|-------------------------------|----------------------|
| -40 to +105 °C | -40 to +105 °C | 10 mg |

^{*} The storage temperature range is for after the assembly.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

| ⚠ REMINDERS |
|---|
| The storage period is less than 6 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH c less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. |
| On not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.). |
| Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. |
| Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. |
| When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due t the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions. |
| Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermadesign. |
| Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. |
| ○ Use a wrist band to discharge static electricity in your body through the grounding wire. |
| On not expose the products to magnets or magnetic fields. |
| On not use for a purpose outside of the contents regulated in the delivery specifications. |
| The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society |

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)

set forth in the each catalog, please contact us.

(3) Medical equipment

person or property.

- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions