


# POWER RELAY

## 1 POLE - 12A

### FTR-K1 Series

#### ■ FEATURES

- 12A
- 3.5mm and 5.0mm terminal pitch
- Low profile (height: 15.7mm)
- High insulation  
Insulation distance (between coil and contacts): 10mm min.  
Dielectric strength: 5KV  
Surge strength: 10KV
- Low coil power (400mW)
- Cadmium free contacts
- Safety standards  
UL, CSA, VDE approved
- UL F class wire insulation
- Flux proof, RT II
- RoHS compliant  
Please see page 6 for more information

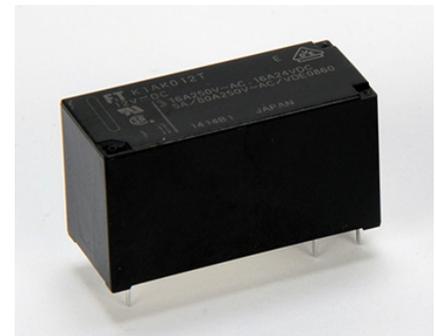

#### ■ PARTNUMBER INFORMATION

[Example]       $\frac{\text{FTR-K1}}{\text{(a)}}$      $\frac{\text{C}}{\text{(b)}}$      $\frac{\text{K}}{\text{(c)}}$      $\frac{\text{012}}{\text{(d)}}$      $\frac{\text{W}}{\text{(e)}}$  -  $\frac{\text{MA}}{\text{(f)}}$  -  $\frac{\text{BG}}{\text{(g)}}$

(a)	Relay type	FTR-K1 : FTR-K1-Series
(b)	Contact configuration	A : 1 form A (SPST-NO) C : 1 form C (SPDT)
(c)	Coil type / enclosure	K : Standard (400mW) / flux proof
(d)	Coil rated voltage	012 : 5.....110 VDC Coil rating table at page 3
(e)	Contact material	W : AgSnO <sub>2</sub>
(f)	Terminal pitch	MA : 3.5mm pitch MB : 5.0mm pitch
(g)	Special type	Nil : Standard type (without gold plate) BG : Gold plated 3 μm

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-K1CK012W-MA

Actual marking: K1CK012W-MA

# FTR-K1 SERIES

## ■ SPECIFICATION

Item			FTR-K1 (A,C) K ( ) W-MA	FTR-K1 (A,C) K ( ) W-MB	
Contact Data	Configuration		1 form A, 1 form C		
	Construction		Single		
	Material		W: AgSnO <sub>2</sub>		
	Resistance (initial)		Max. 100mΩ at 1A, 6VDC		
	Contact rating (resistive)		12A, 250VAC / 24VDC		
	Max. carrying current *1		14A		
	Max. switching voltage		440VAC / 300VDC		
	Max. switching power		3,000VA / 288W		
	Min. switching load *2		100mA, 5VDC		
Life	Mechanical		Min. 20 x 10 <sup>6</sup> operations		
	Electrical	AC contact rating	Min. 100 x 10 <sup>3</sup> operations		
		DC contact rating	Min. 100 x 10 <sup>3</sup> operations		
Coil Data	Rated power (20 °C)		400mW (430mW at 48V coil)		
	Operate power (20 °C)		196mW (210mW at 48V coil)		
	Operating temperature range		-40 °C to +85 °C (no frost)		
Timing Data	Operate (at nominal voltage)		Max. 15ms (without bounce)		
	Release (at nominal voltage)		Max. 5ms (without bounce, no diode)		
Insulation	Resistance (initial)		Min. 1,000MΩ at 500VDC		
	Dielectric strength	Open contacts	1,000VAC (50/60Hz) 1min		
		Contacts to coil	5,000VAC (50/60Hz) 1min		
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave		
	Clearance		10mm		
	Creepage		10mm		
	EN61810-1, VDE0435	Voltage		250V	
		Pollution degree		3	
Material group		III a			
Category		C / 250V (Reference voltage) (VDE0110b)			
Other	Vibration resistance	Misoperation≥1us	10 to 55Hz double amplitude 0.7mm		
		Endurance	10 to 55Hz double amplitude 1.5mm		
	Shock	Misoperation≥1us	100m/s <sup>2</sup> (11 ± 1ms)		
		Endurance	1,000m/s <sup>2</sup> (6 ± 1ms)		
	Weight		Approximately 13g		
	Sealing		Flux proof, RTII		

\* 1: Need to consider the heat from PCB when max. current is more than 10A.

\* 2: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release-Voltage (VDC) *	Rated Power (mW)
005	5	62	3.5	0.5	400
006	6	90	4.2	0.6	
009	9	202	6.3	0.9	
012	12	360	8.4	1.2	
018	18	810	12.6	1.8	
022	22	1,210	15.4	2.2	
024	24	1,440	16.8	2.4	
028	28	1,960	19.6	2.8	
048	48	5,360	33.6	4.8	430
060	60	8,570	42.0	6.0	420
110	110	28,800	77.0	11.0	








Note: All values in the table are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.

## ■ SAFETY STANDARDS

Type	Compliance	Contact rating	
		1a	1c
UL	UL 508	Flammability: UL 94-V0 (plastics)	
	E63614	FTR-K1AK( )W-(MA, MB) 12A/16A, 24 VDC (resistive), 85°C 16A, 277 VAC (resistive), 85°C 1/2hp, 277VAC, 85°C 1/3hp, 125VAC, 85°C Pilot duty: B300, 85°C	FTR-K1CK( )W-(MA, MB) 12A/16A, 24 VDC (resistive), 85°C 12A/16A, 277 VAC (resistive), 85°C 1/2hp, 277VAC, 85°C 1/3hp, 125VAC, 85°C 1/8hp, 125VAC, 85°C Pilot duty: B300, 85°C
CSA	C22.2 No. 14 LR 40304	FTR-K1(A,C)K( )W-(MA, MB) 12A, 277VAC/24VDC (resistive) 16A, 277 VAC/24VDC (resistive) 1/2 HP, 277VAC 1/3HP, 125VAC Pilot duty: B300	
VDE	IEC/EN61810-1 EN60065 EN60335-1 clause 15.3; 16.3; 29.1; 29.2; 29.3 EN60730 clause 12.2; 13.2; 20.1; 20.2; 20.3	FTR-K1(A, C) K ( )W-(MA, MB) 12A, 250 VAC (cosφ=1), 85 °C 16A, 250 VAC (cosφ=1), 85 °C 12A, 24VDC (0ms), 85 °C 16A, 24VDC (0ms), 85 °C 3.5A, 250 VAC (cosφ=0.4), 85 °C	

## CHARACTERISTIC DATA

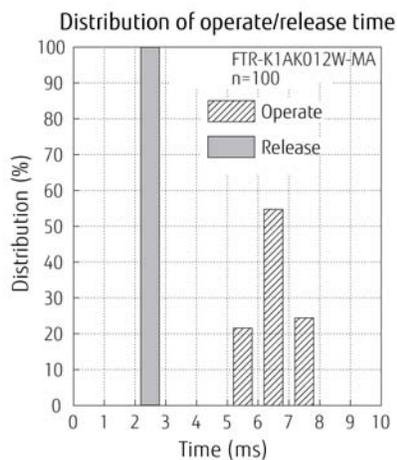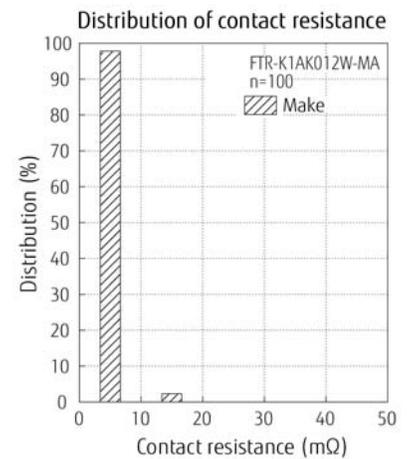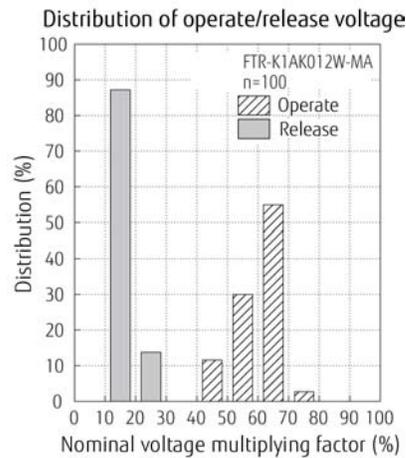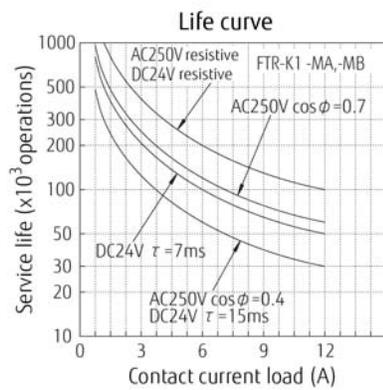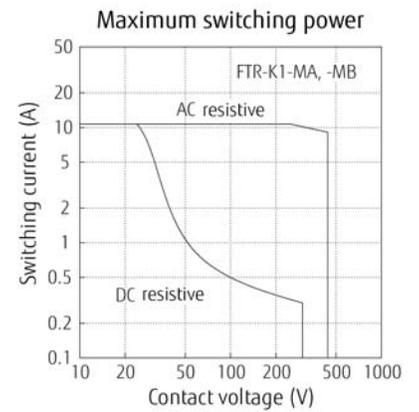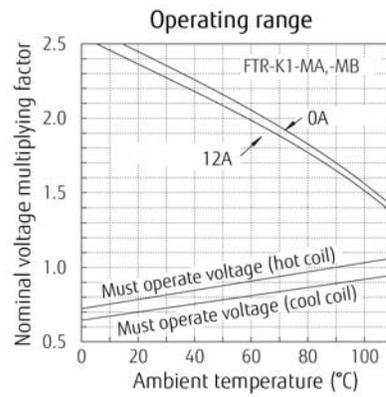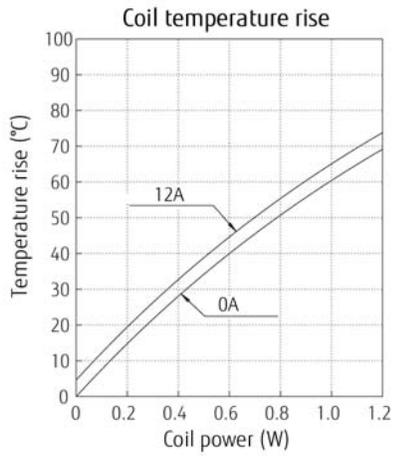


# FTR-K1 SERIES

## ■ DIMENSIONS


FTR-K1-MA

### ● Dimensions

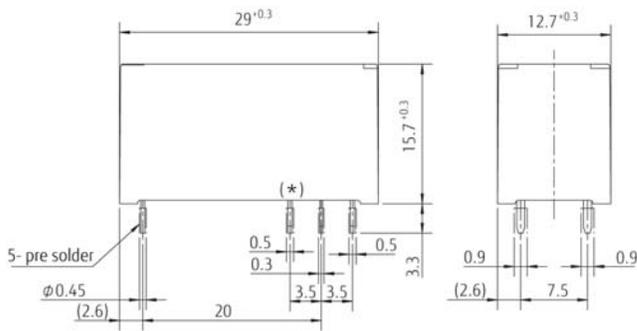


\* Terminal omitted on 1 form A type

### ● Schematics




### ● PC board mounting hole layout (BOTTOM VIEW)

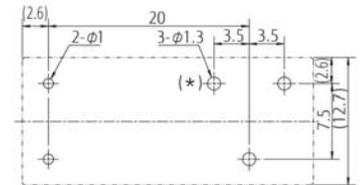


FTR-K1-MB

### ● Dimensions

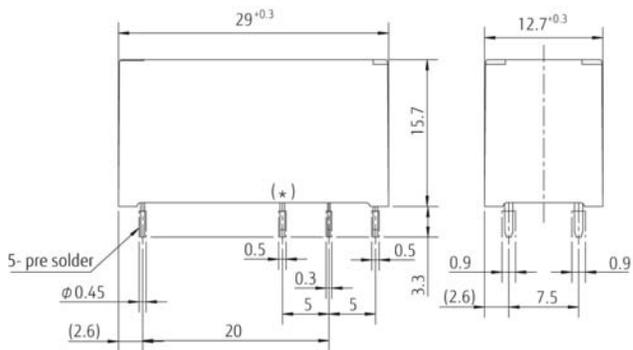


\* Terminal omitted on 1 form A type

### ● Schematics



### ● PC board mounting hole layout (BOTTOM VIEW)

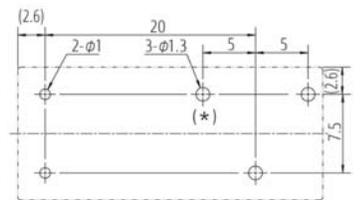

Unit: mm

## RoHS Compliance and Lead Free Information

### 1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives. As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at: <http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Condition

- Recommended solder Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-heating: maximum 120°C  
within 90 sec.  
Soldering: dip within 5 sec. at  
255°C ± 5°C solder bath  
Relay must be cooled by air immediately  
after soldering

#### Solder by Soldering Iron:

Soldering Iron 30-60W  
Temperature: maximum 350-360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2014 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. May 08, 2014