


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated chip junction
- High current capability
- Low forward voltage drop
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU

MECHANICAL DATA

- Case: KBP molded plastic body
- Terminals: Plated leads solderable per MIL-STD-750, method 2026
- Mounting Position: Any

KBP

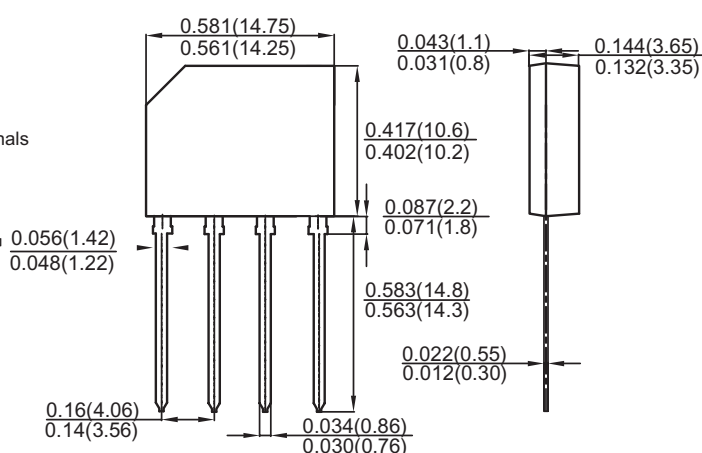

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

	Symbols	KBP4005	KBP401	KBP402	KBP404	KBP406	KBP408	KBP410	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current	I _{AV}	4.0							Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	80							Amps
Rating for fusing (t ≤ 8.3ms)	I ² t	26.56							A ² s
Maximum Instantaneous Forward Voltage at 4.0 A DC	V _F	1.1							Volts
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25°C	5							μA
	T _A =125°C	500							μA
Typical thermal resistance	R _{θJA}	40							°C/W
	R _{θJL}	20							°C/W
Operating temperature range	T _J	-55 to +150							°C
Storage temperature range	T _{STG}	-55 to +150							°C

RATINGS AND CHARACTERISTIC CURVES KBP4005 THRU KBP410

FIG.1-MAXIMUM FORWARD SURGE CURRENT

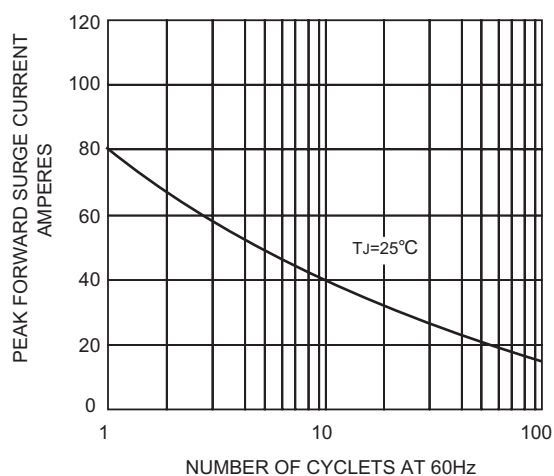


FIG.2-FORWARD CURRENT DERATING CURVE

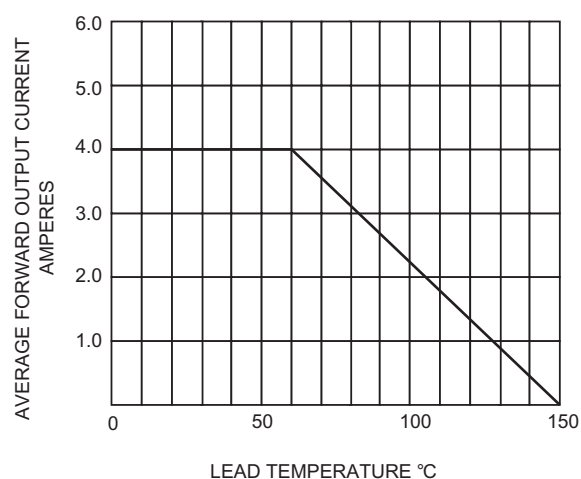


FIG.3-TYPICAL FORWARD CHARACTERISTICS

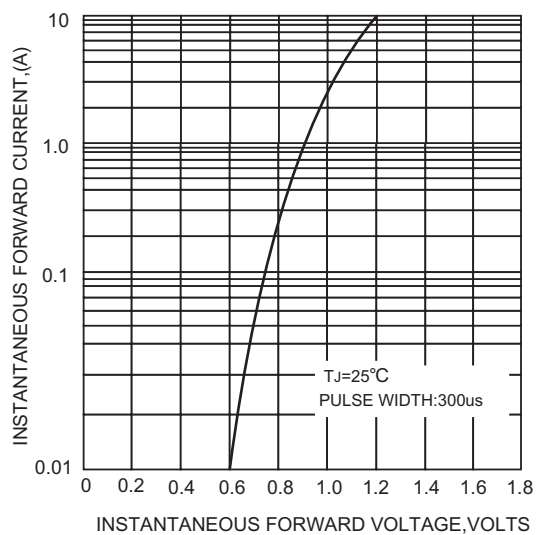


FIG.4 -TYPICAL REVERSE CHARACTERISTICS

