


Features

- 7pin SIP Package with Industry-Standard Footprint
- Input / Output Isolation Voltage: 1.5kVDC
- High Efficiency
- Lead Free Design, RoHS Compliant
- Operating temperature: -40°C to +85°C
- Meet Safety Standard / Approval: IEC / EN60950-1



Applications

These converters are well suitable for battery operated equipment, measurement equipment, telecom, wireless network, Industry control system, everywhere where isolated, tightly regulated voltages and compact size are required.

Technical Specification

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

Model Number	Input Voltage Range(V)	Output Voltage (V)	Output Current (mA) ⁽¹⁾	Input Current (mA) Typ.		Eff .(%) ⁽²⁾ Typ.	Capacitive Load, max. ⁽³⁾ (uF)
				No Load	Full Load		
DHA2-05S1	4.75-5.25 Nominal:5	5	400	40	571	70	47
DHA2-05S2		12	167		527	76	22
DHA1R5-05S3		15	100		400	75	10
DHA2-12S1	11.4-12.6 Nominal:12	5	400	20	228	73	47
DHA2-12S2		12	167		214	78	22
DHA1R5-12S3		15	100		164	76	10
DHA2-15S1	14.3-15.8 Nominal:15	5	400	15	183	73	47
DHA2-15S2		12	167		171	78	22
DHA1R5-15S3		15	100		132	76	10
DHA2-24S1	22.8-25.2 Nominal:24	5	400	10	114	73	47
DHA2-24S2		12	167		106	79	22
DHA1R5-24S3		15	100		80	78	10

Input Specifications

5V nominal input	4.75-5.25V
12V nominal input	11.4-12.6V
15V nominal input	14.3-15.8V
24V nominal input	22.8-25.2V

Input filter

Capacitor

Environmental Specifications

Operating ambient temperature	-40°C to +85°C
Maximum case temperature	+105°C
Storage temperature range	-55°C to +125°C
Relative humidity	95%RH Max.

Output Specifications

Output power	2Watts Max.
--------------	-------------

Voltage accuracy	Nominal Vin and full load 5Vdc 12Vdc 15Vdc	4.75-5.15V 11.64-12.24V 14.7-15.3V
------------------	---	--

Minimum load	0A
--------------	----

Line regulation	For Vin charge of -5% +5%	±0.25% Max.
-----------------	---------------------------	-------------

Load Regulation	10%~100% load	±1% Max.
-----------------	---------------	----------

Ripple and Noise (20MHz Bandwidth)	60mVp-p Max.
------------------------------------	--------------

Maximum capacitive load	See table
-------------------------	-----------

Output short circuit protection	Automatic recovery	Continuous
---------------------------------	--------------------	------------

Temperature coefficient	±0.03%/°C Typ.
-------------------------	----------------

General Specifications

Efficiency	Nominal input and full load	See table
------------	-----------------------------	-----------

Isolation voltage	Input to output	1500VDC (60 second)
-------------------	-----------------	---------------------

Isolation resistance	500VDC	1000MΩ Min.
----------------------	--------	-------------

Isolation capacitance	30pF Typ.
-----------------------	-----------

Switching frequency	300kHz Max.
---------------------	-------------

Reliability, calculated MTBF	2×10^6 Hrs
------------------------------	---------------------

Physical Specifications

Case material	Plastic (UL94 V-0)
---------------	--------------------

Potting material	PU (UL94 V-0)
------------------	---------------


Dimensions	19.6x10.1x7.0 mm
------------	------------------

Weight	2.5g Typ.
--------	-----------


Note

1. Io below this value will not damage these converters, however, they may not meet all listed specifications.
2. Typical value, tested at nominal input and full load.
3. For each output.
4. Specifications subject to change without notice.
5. In case of long input lines or hot plug-in requirements, we recommended to use an external low ESR capacitor (22uF) near to the converter's input pins.

Power Derating Curve

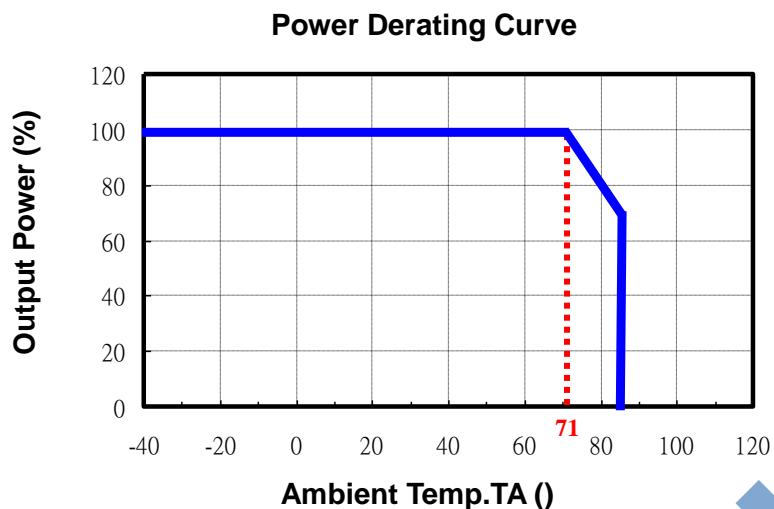

Mechanical Dimensions

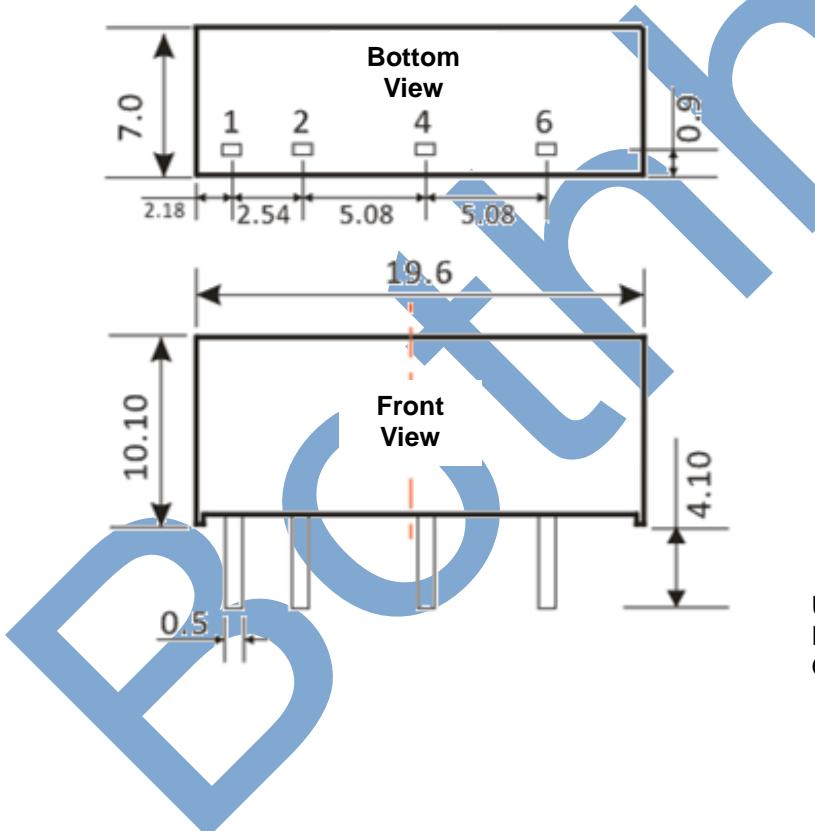


Pin Assignment	
Pin	Single
1	+Vin
2	-Vin
4	-Vout
6	+Vout

Unit: mm (inch)
 Pin section tolerances: $\pm 0.1 (\pm 0.004)$
 General tolerances: $\pm 0.5 (\pm 0.02)$

Test Configurations

All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

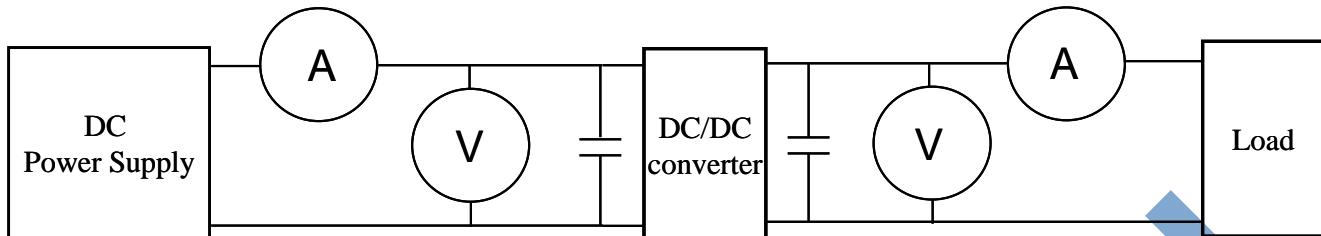

- ◎ DC Power Supply: It offers a wide voltage and current range precisely.
- ◎ Current meter (A): Accuracy $\rightarrow 200\mu\text{A} \sim 200\text{mA}$ 4 ranges $\pm(0.2\% \text{ rdg} + 2 \text{ digits})$
 $2000\text{mA} \sim 20\text{A}$ 2 ranges $\pm(0.3\% \text{ rdg} + 2 \text{ digits})$.
- ◎ Voltage meter (V): Accuracy $\rightarrow \pm(0.03\% \text{ rdg} + 4 \text{ digits})$.
- ◎ Load: At full load.
- ◎ Wires: The resistance of the wires must be small.

1. Input voltage range: Narrow input voltage range ($\pm 10\%$)、wide input voltage range (2:1 and 4:1)。

EX: Narrow input voltage range ($\pm 10\%$)

5V nominal input	\rightarrow	4.5~5.5V
12V nominal input	\rightarrow	10.10~13.2V
24V nominal input	\rightarrow	21.6~26.4V

Wide input voltage range 2:1

5V nominal input	\rightarrow	4.5~9V
12V nominal input	\rightarrow	9~18V
24V nominal input	\rightarrow	18~36V
48V nominal input	\rightarrow	36~75V

Wide input voltage range 4:1 (W)

24V nominal input	\rightarrow	9~36V
48V nominal input	\rightarrow	18~75V

2. Input power :

$$P_{in} = V_{in} \times I_{in}$$

V_{in} : Input voltage
 I_{in} : Input current

3. Output power :

$$P_{out} = V_{out} \times I_{out}$$

V_{out} : Output voltage
 I_{out} : Output current

4. Efficiency :

$$\text{Efficiency} = \frac{P_{out}}{P_{in}} \times 100\%$$

P_{out} : Output power
 P_{in} : Input power

5. Voltage accuracy:

$$\frac{|V_{out}-V_{out(\text{nominal})}|}{V_{out}} \times 100\%$$

V_{out} : Output voltage
 $V_{out(\text{nominal})}$: Nominal output voltage

6. Line regulation:

Narrow input voltage range ($\pm 10\%$) and unregulated output voltage series.

$$\text{Line regulation} = \frac{\Delta V_{\text{out}}}{\Delta V_{\text{in}}}$$

$$\Delta V_{\text{out}} = \frac{V_{\text{out}}(+10\%) - V_{\text{out}}(-10\%)}{V_{\text{out}}} \times 100\%$$

$V_{\text{out}}(+10\%)$: Output voltage at $V_{\text{in}} = 1.1 \times V_{\text{in(nominal)}} \& \text{full load}$

$V_{\text{out}}(-10\%)$: Output voltage at $V_{\text{in}} = 0.9 \times V_{\text{in(nominal)}} \& \text{full load}$

V_{out} : Output voltage at $V_{\text{in}} = V_{\text{in(nominal)}} \& \text{full load}$

$$\Delta V_{\text{in}} = \frac{V_{\text{in}}(+10\%) - V_{\text{in}}(-10\%)}{V_{\text{in(nominal)}}} \times 100\%$$

$V_{\text{in}}(+10\%)$: Input voltage = $1.1 \times V_{\text{in(nominal)}}$

$V_{\text{in}}(-10\%)$: Input voltage = $0.9 \times V_{\text{in(nominal)}}$

$V_{\text{in(nominal)}}$: Nominal Input voltage


7. Load regulation :

$$|\frac{V_{\text{out(FL)}} - V_{\text{out(NL)}}}{V_{\text{out(FL)}}}| \times 100\%$$


$V_{\text{out(FL)}}$: Output voltage at full load

$V_{\text{out(NL)}}$: Output voltage at 25% full load or 10% full load

8. Ripple and Noise: as shown below. The bandwidth is 0-20MHz.

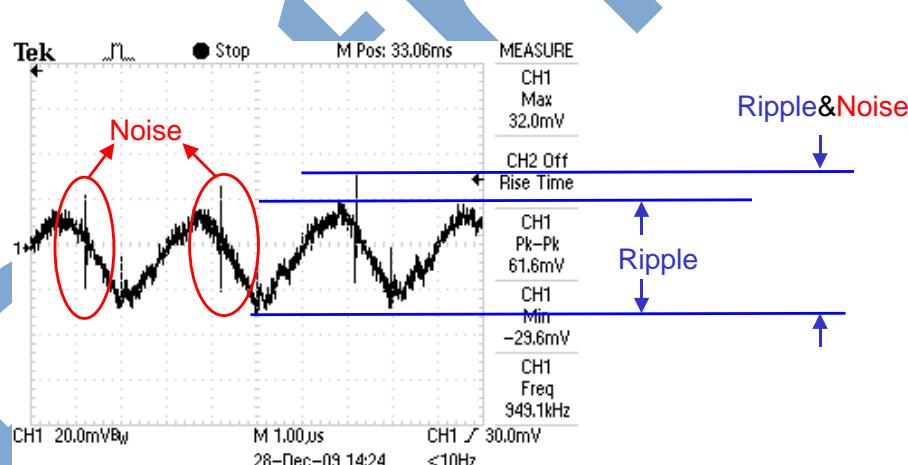


Output Ripple&Noise measurement test circuit: as shown below.

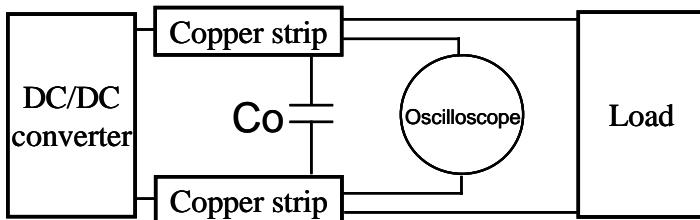

Co: usually 0.47uF.

9. [Temperature derating curve](#): The DC-DC converter will operate over a wider temperature range if less power is drawn from the output and the device is already running. The temperature derating curve shows the operating power-temperature range. As shown below.

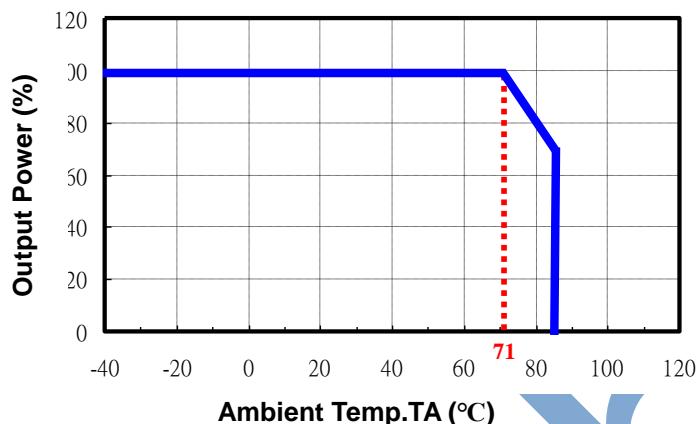

10. [Switching frequency](#): The nominal operating frequency of the DC-DC converters.

11. [Input to output isolation](#): The dielectric breakdown strength test between input and output circuits. This is the isolation voltage the device is capable of withstanding for a specified time, usually 1 second or 1 minute.

12. [Input source impedance](#): The power module should be connected to low ac-impedance input source.

Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 0.1Ω at 100KHz) capacitor of a 22uF for the power module.

