



Document No.: S-E09-2109

TY-OHM ELECTRONIC WORKS CO.,LTD.

**FUSIBLE WIRE WOUND RESISTORS, FLAMEPROOF
RESISTOR SPECIFICATION**

Version : 2021.B

APPROVED BY

APPROVED	REVIEWED	PREPARED
<i>Jacob Wu</i> Aug 2, 2021	<i>Jason Chen</i> Aug 2, 2021	<i>Rob Lo</i> Aug 2, 2021

Unauthorized duplication is prohibited

FUSIBLE WIRE WOUND RESISTORS,FLAMEPROOF

1. Applicable Scope:

This standard specification is for use in consumer electronics, computers, telecommunications, control instruments...etc.

2. Part Number:

It is composed by Type, Rated Wattage, Nominal Resistance, Tolerance, Package and Coating Color. e.g.

FKN	3WS	22R	J	T/B	C7
Type	Rated Wattage	Nominal Resistance	Tolerance	Package	Coating Color

2.1 Type :

Fusible Wire Wound Resistors, Flameproof are called "FKN".

2.2 Rated Wattage:

Shown by "W", such as 3WS.

2.3 Nominal Resistance:

Ω is its unit, which be in accordance with JIS-C6409 article 6 (EIA RS-196A) series.

Letter "22R" indicates resistance value 22Ω .

2.4 Tolerance:

It is measured by Bridge-method at room temperature and expressed by a capital letter.

$J = \pm 5\%$.

2.5 Package:

T/B=tape in box; Nil=Bulk.


2.6 Coating Color:

Letter "C7" indicates light green coating color.

Remark: FKN Series Resistors are are RoHS & Halogen Free Compliant.

3. Rated Power:

Rated power is the value of Max load wattage specified at the ambient temperature of 20°C , and shall meet the functions of electrical and mechanical performance. When the ambient temperature surpasses above mentioned temperature, the value declines as per following DERATING CURVE.

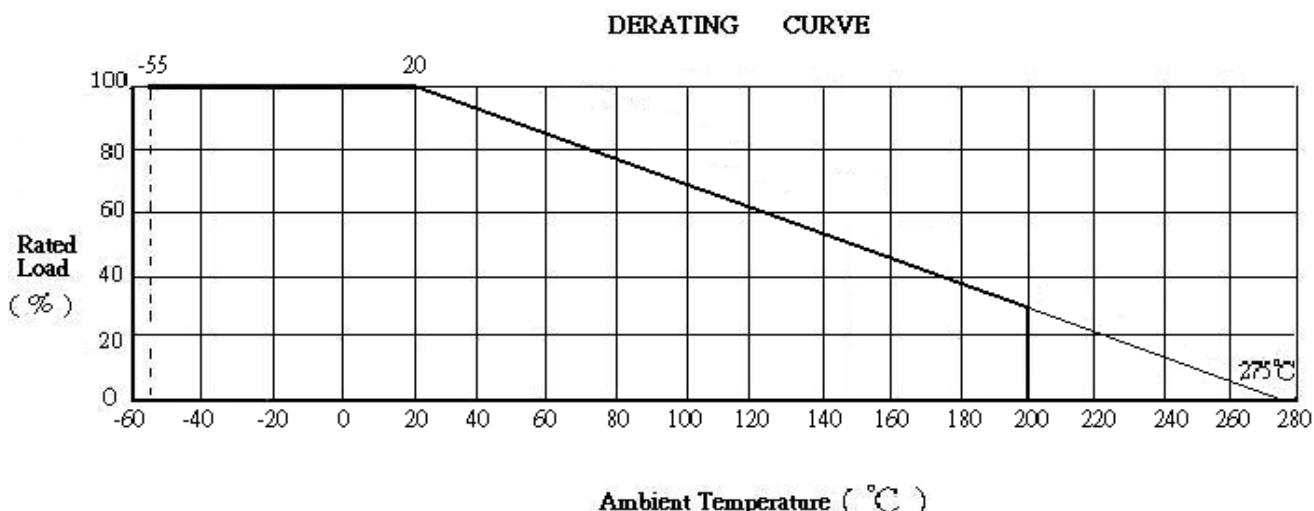

FUSIBLE WIRE WOUND RESISTORS,FLAMEPROOF


3.1 Rated Voltage:

It is calculated through the following formula:

$$E = \sqrt{PXR} \quad \text{where} \quad \begin{aligned} E: & \text{ rated voltage (V)} \\ P: & \text{ rated power (W)} \\ R: & \text{ total nominal resistance (\Omega)} \end{aligned}$$

4. Dimension and structure:

4.1 Dimension:

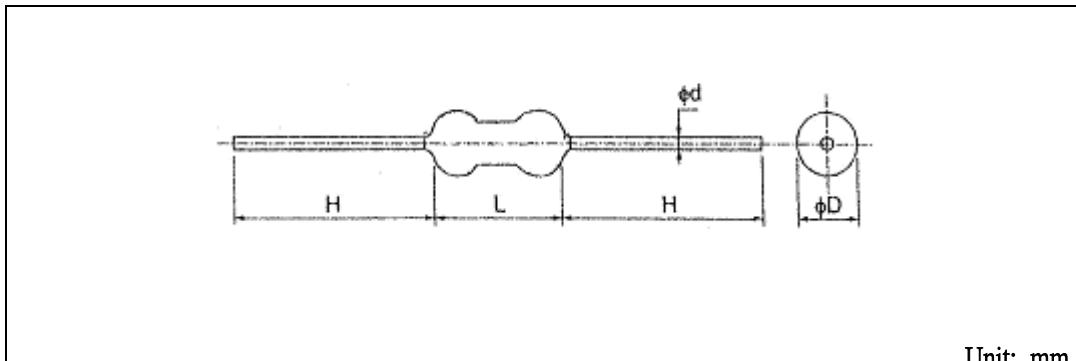

TYPE	D \pm 1	L \pm 1	H \pm 3	d \pm 0.1	Resistance	Dielectric Withstanding Voltage
FKN						
3WS	5	11	28	0.8	22 Ω	500V

4.2 Structure:

4.2.1 Terminal:

Terminal is to be firmly connected with resistors element, both electrically and mechanically, and allow easy soldering.

4.2.2 Coating:

Coating is done by light green flameproof paint (resistant to 800°C) or Silicon Resin which is solid enough to be free from looseness, crack and easy breakage. It is also resistant to cleaning and industrial solvents, and the paint shall be limited within 2mm of lead wires from resistor body.

4.2.3 Marking:

Marking is made on resistors surface by color coding.

1st, 2nd, 3rd : nominal resistance.

4th: tolerance.

5th: black color band for fusible wire wound resistors, flameproof.

5. Operating Temperature Range: -55°C ~ 200°C

6. Mechanical Performance:

6.1 Terminal tensile:

To fix the resistor body, a static load of 2.5kg. is to be gradually applied into the terminal for 10 seconds without causing any looseness and fall.

FUSIBLE WIRE WOUND RESISTORS,FLAMEPROOF

6.2 Twist withstand:

To bend the lead wire at the point of about 6mm from resistor body to 90°, then catch the wire at 1.2 ±0.4mm apart from the bent point end and turn it (clockwise) by 360 degrees perpendicular to the resistor axis at speed of 10 seconds per turn, and do the same counterclockwise again which constitute a whole turn. Repeat the turn 2 times without causing any break and looseness.

7. Electrical Performance:

7.1 Resistance Temperature Coefficient:

It shall be within ±200ppm/°C.

$$T.C \text{ (ppm/°C)} = [(R2 - R1) / R1] \times [1 / (T2 - T1)] \times 10^6$$

where R1: resistance value at reference temperature

R2: resistance value at test temp.

T1: reference temp.

T2: test temp.

7.2 Temperature Cycle:

Following temp. cycles are to be made 5 times and then put at room temp. for one hour, the resistance value change rate between pre-and-post test shall be within ±1%.

Steps	Temperature(°C)	Time (minutes)
1 st step	-55 ± 3	30
2 nd step	Room temp.	3
3 rd step	200 ± 3	30
4 th step	Room temp.	3

7.3 Short Time Over Load:

When the resistors are applied 5 times as much as rated wattage for 5 seconds continuously, it shows no evidence of arc, flame...etc. Removing the voltage and place the resistors to the normal condition for 30 minutes, the resistance value change rate between pre-and-post test shall be within ±2%.

7.4 Insulation Character :

Resistors are located in a V-shaped metal trough. Using the DC 500V megger instrument 2 poles to clutch either side of lead wires and metal trough, measuring the Insulation Resistance which shall be over 1000MΩ .

7.5 Voltage Withstanding:

Resistors are located in a V-shaped metal trough. Applying suitable voltage listed on DIMENSION for one minute and should find no physical damage to the resistors, such as arc, char...etc.

7.6 Load Life:

The resistors arrayed are sent into the 70°C oven, applying rated voltage at the cycle of 1.5 hours ON, 0.5 hour OFF for 1000^{±48} hours in total. Then, after removing the voltage, take the resistors out of the oven and left under normal temp. for one hour cooling. The resistance value change rate between pre-and-post test shall be within ±5%.

7.7 Moisture-proof Load Life:

The resistors arrayed are placed into a constant temp./humidity oven at the temp. of 40 ±2°C and the humidity of 90~95%, then 1/10 DC rated power is applied for 1.5 hours and cut off for 0.5 hour. The similar cycle will be repeated for 1000^{±48} hours in total (including cut-off time). Then remove the voltage, taking the resistors out of the oven and leaving them at room temp. for one hour. The resistance value change rate between pre-and-post test shall be within ±5%. There also shall be no evidence of remarkable change on appearance, and the marking shall not be illegible.

FUSIBLE WIRE WOUND RESISTORS,FLAMEPROOF

7.8 Solder-ability:

The leads with flux are dipped in a melted solder of $235 \pm 5^\circ\text{C}$ for 2 seconds, more than 95% of the circumference of the lead wires shall be covered with solder.

7.9 Resistance to Soldering Heat:

Two leads are together dipped in a melted solder of $270 \pm 5^\circ\text{C}$ for 10 ± 1 seconds, or $350 \pm 10^\circ\text{C}$ for 3.5 ± 0.5 seconds, Then remove the resistors and leaving them at room temp. for one hour. The resistance value change rate between pre-and-post test shall be within $\pm 1\%$.

7.10 Nonflammability:

The resistors are applied the power of 16 times the rated wattage for 5 min. and shall not get flame.

7.11 Fusing Characteristics:

7.11.1 The resistors are applied the power of 60 wattage and shall be fusing within 60 sec.


7.11.2 The resistors will fuse when mains voltage of 230 VAC is directly applied. No flames, no explosion and no arc happened.

7.12 Surge Withstanding:

The resistors are designed to withstand 1.5kV, $1.2/50\mu\text{s}$ pulse according to IEC61000-4-5, 10 pulses per voltage, 30 seconds between each pulse.

The resistance value change rate between pre-and-post test shall be within $\pm 5\%$.


7.13 Pulse Power Performance:

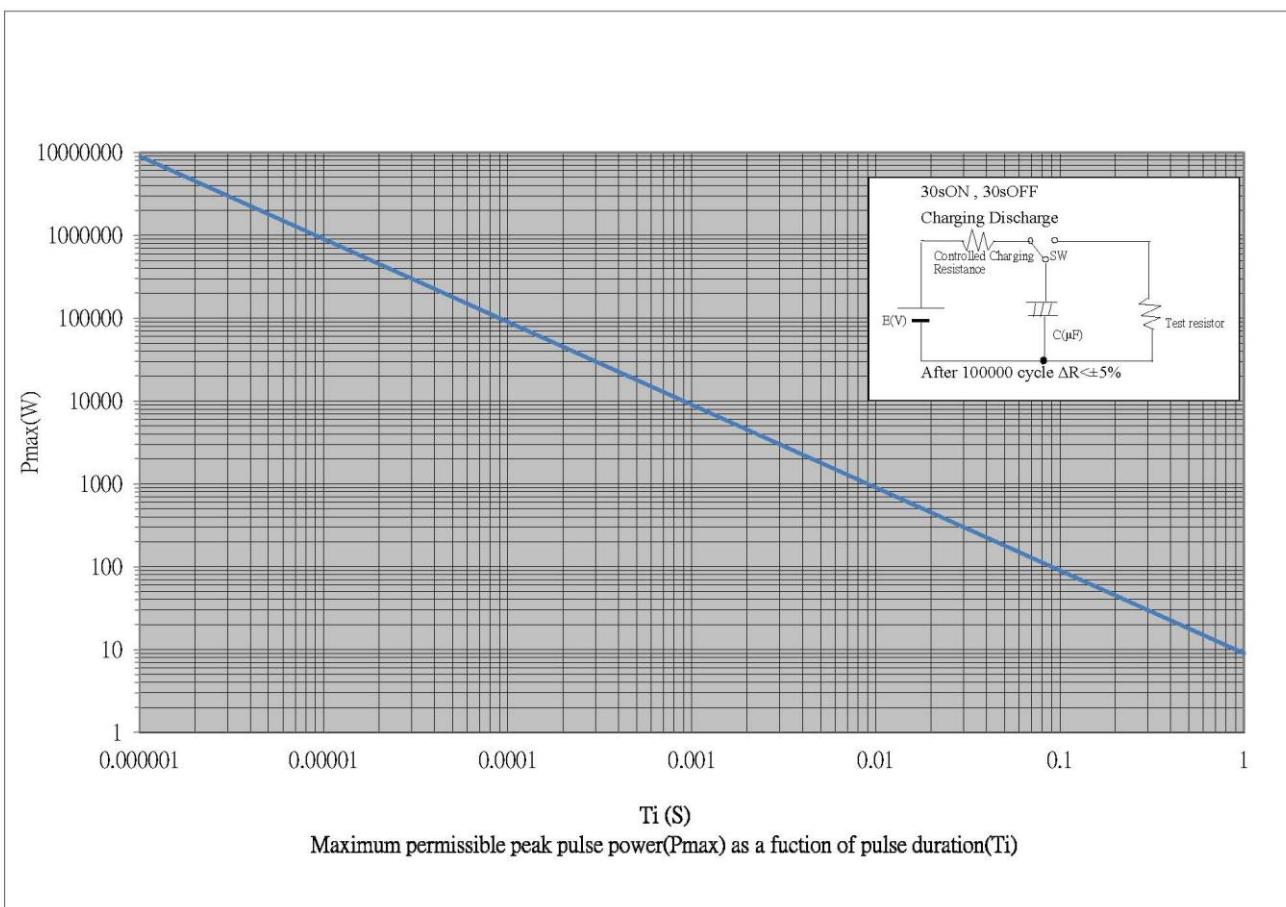

FUSIBLE WIRE WOUND RESISTORS,FLAMEPROOF

8. Package:

8.1 Taping Specifications:

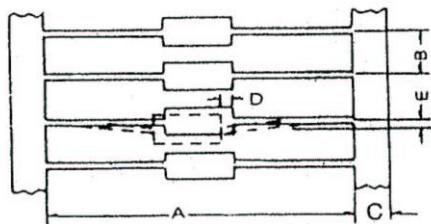

Unit : mm

FKN	Size Package	A	B	C \pm 1	D Max	E Max
3WS	T/B	63 \pm 1	5 \pm 0.5	6	0.6	1.2