




SOT-23


## DESCRIPTION

The JTL431 are three-terminal adjustable shunt regulators with specified thermal stability .The output voltage may be set to any value between Vref and 36V with two external resistors . Active output circuitry provides a very sharp turnon characteristic,making these devices excellent replacements for zener diodes in many applications.



## Features

- The output voltage can be adjusted 2.5V to 36V
- The JTL431 precision reference is offered in two voltage tolerance: 0.4% and 0.8%.
- Fast turn-on response
- Sink current capability 1mA to 100mA
- Low output noise
- Industrial temperature range

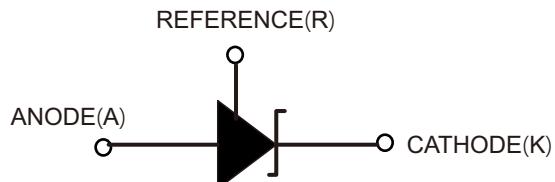

## Application

- Shunt regulator
- High-current shunt regulator
- Precession current limiter

## Absolute Maximum Ratings (Note 1)

Symbol	Parameter		Rating	Unit
$V_{KA}$	Cathode Voltage		40	V
$I_{KA}$	Cathode Current Range (Continuous)		-100 to 150	mA
$I_{REF}$	Reference Input Current Range		10	mA
$P_D$	Power Dissipation		Z, R Package: 770	mW
			N Package: 370	
$\theta_{JA}$	Thermal Resistance (Junction to Ambient)	SOT-23	380	°C/W
$T_J$	Junction Temperature		+150	°C
$T_{STG}$	Storage Temperature Range		-65 to +150	°C
ESD	ESD (Human Body Model)		2000	V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.



## Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V <sub>KA</sub>	Cathode Voltage	V <sub>REF</sub>	36	V
I <sub>KA</sub>	Cathode Current	1.0	100	mA
T <sub>A</sub>	Operating Ambient Temperature Range	-40	+125	°C

## Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Symbol	Parameter	Conditions		Min	Typ	Max	Unit	
V <sub>REF</sub>	Reference Voltage	JTL431A	0.4%	V <sub>KA</sub> = V <sub>REF</sub> , I <sub>KA</sub> = 10mA	2.490	2.500	2.510	V
		JTL431B	0.8%		2.480	2.500	2.520	
ΔV <sub>REF</sub>	Deviation of Reference Voltage Over Full Temperature Range	V <sub>KA</sub> = V <sub>REF</sub> I <sub>KA</sub> = 10mA	0 to +70°C	—	4.5	8	mV	
			-40 to +85°C	—	4.5	10		
			-40 to +125°C	—	4.5	16		
ΔV <sub>REF</sub> ΔV <sub>KA</sub>	Ratio of Change in Reference Voltage to the Change in Cathode Voltage	I <sub>KA</sub> = 10mA	ΔV <sub>KA</sub> = 10V to V <sub>REF</sub>	—	-1.0	-2.7	mV/V	
			ΔV <sub>KA</sub> = 36V to 10V	—	-0.5	-2.0		
I <sub>REF</sub>	Reference Current	I <sub>KA</sub> = 10mA, R <sub>1</sub> = 10kΩ, R <sub>2</sub> = ∞	—	0.7	4	μA		
ΔI <sub>REF</sub>	Deviation of Reference Current Over Full Temperature Range	I <sub>KA</sub> = 10mA, R <sub>1</sub> = 10kΩ R <sub>2</sub> = ∞, T <sub>A</sub> = -40 to +125°C	—	0.4	1.2	μA		
I <sub>KA</sub> (Min)	Minimum Cathode Current for Regulation	V <sub>KA</sub> = V <sub>REF</sub>	—	0.4	1.0	mA		
I <sub>KA</sub> (Off)	Off-state Cathode Current	V <sub>KA</sub> = 36V, V <sub>REF</sub> = 0	—	0.05	1.0	μA		
Z <sub>KA</sub>	Dynamic Impedance	V <sub>KA</sub> = V <sub>REF</sub> , I <sub>KA</sub> = 1 to 100mA, f ≤ 1.0kHz	—	0.15	0.5	Ω		
θ <sub>JC</sub>	Thermal Resistance	SOT23	—	135.48	—	°C/W		



FIGURE 1. TEST CIRCUIT FOR  $V_{KA} = V_{REF}$

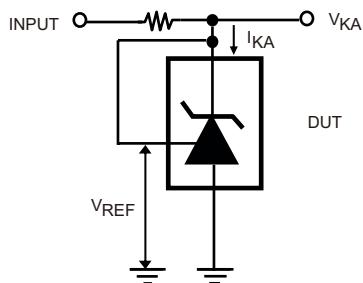


FIGURE 2. TEST CIRCUIT FOR  $V_{KA} \geq V_{REF}$

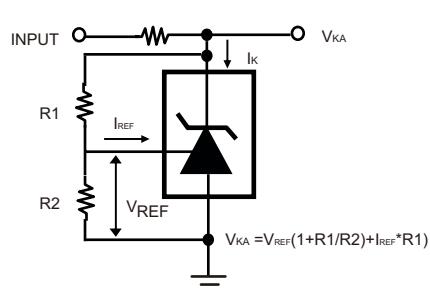


FIGURE 3. TEST CIRCUIT FOR  $I_{KA}$  (OFF)

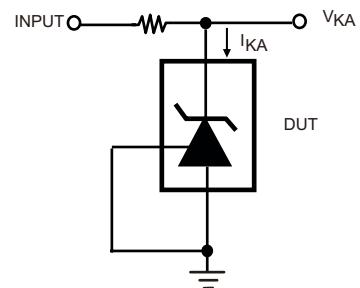


FIGURE 4. TEST CIRCUIT FOR PULSE RESPONSE








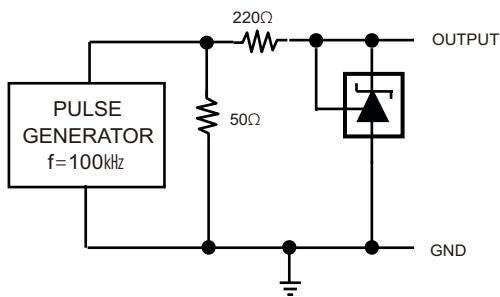


FIGURE 5. TEST CIRCUIT REFERENCE IMPEDANCE

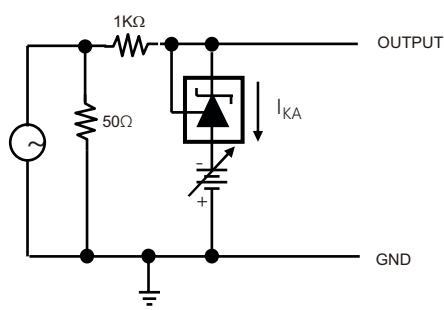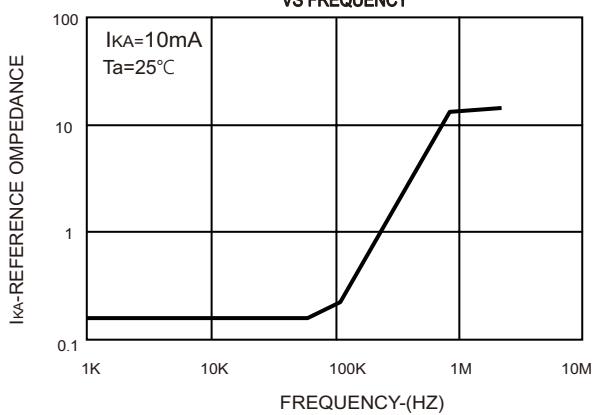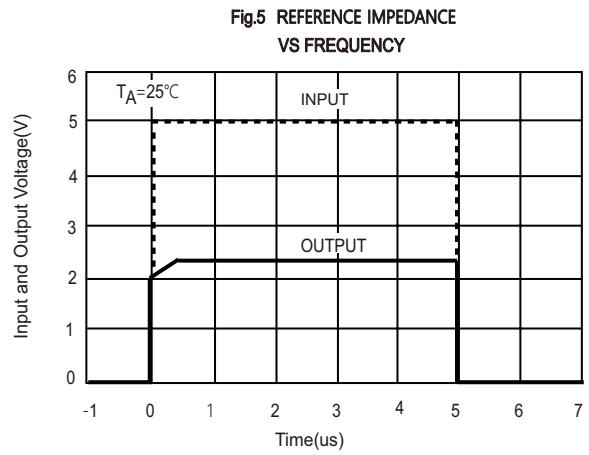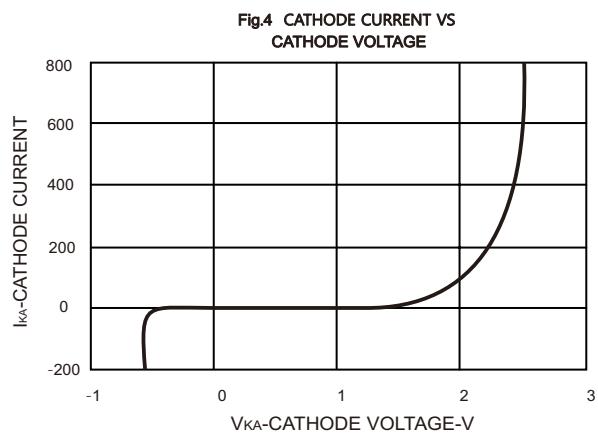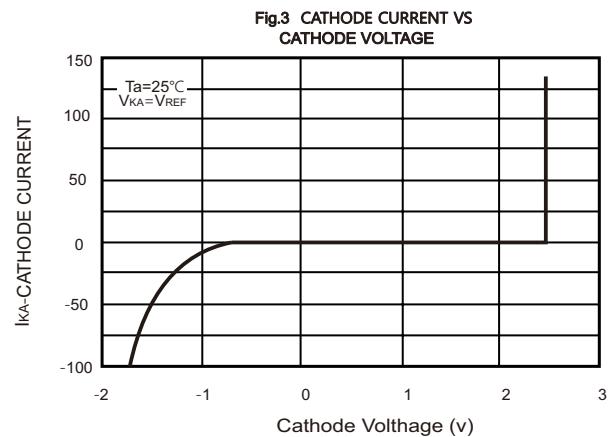

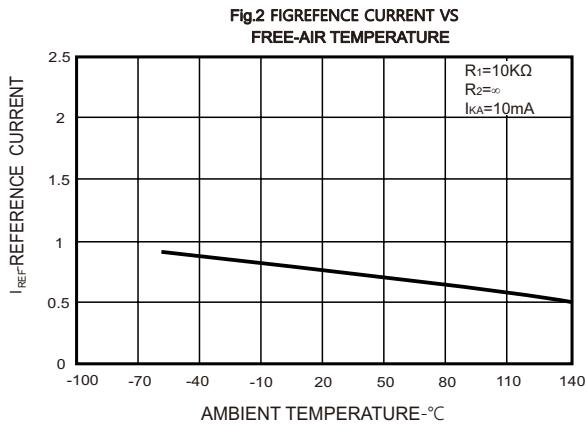


## Typical Characteristics

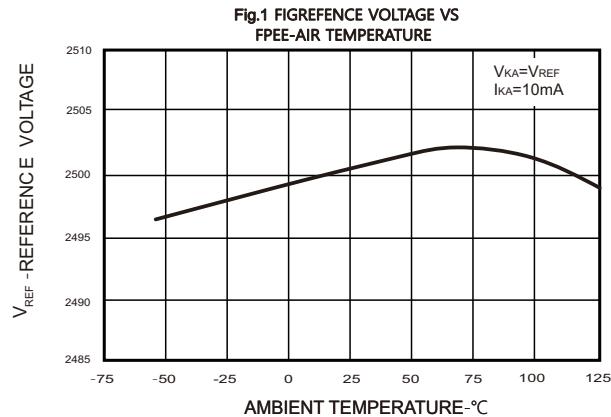




### SOT-23 Package Outline Dimensions

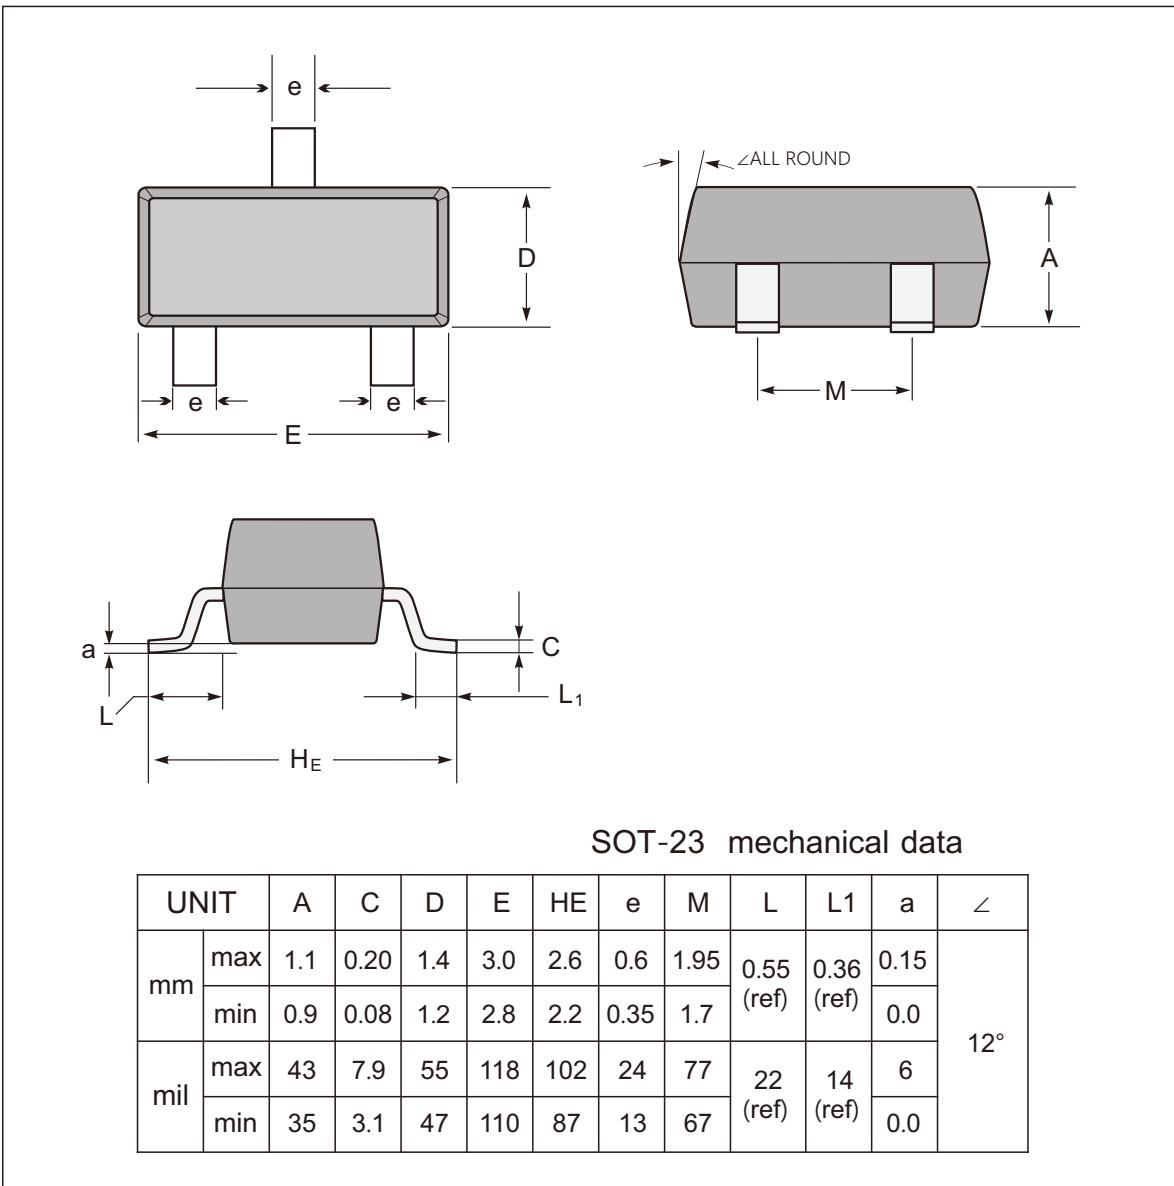

The recommended mounting pad size

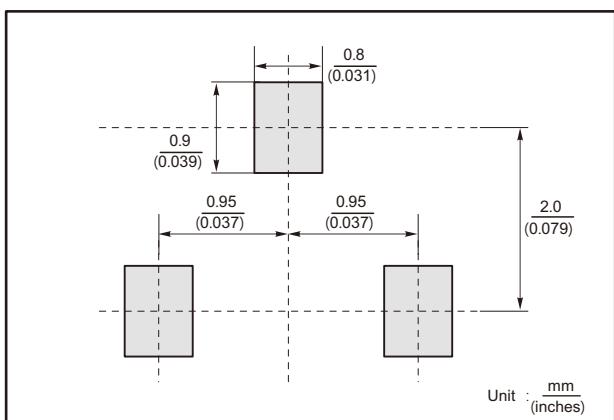

Marking

Type number	Marking code
JTL431	431



#### Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, not does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.



## 文件履历表