

描述/Description

- XNM50550AT/ATS基于快恢复MOSFET技术，为小功率电机驱动应用（如风扇和水泵）提供紧凑型逆变解决方案。
XNM50550AT/ATS is an Advanced IPM Based on Fast-Recovery MOSFET Technology as a Compact Inverter Solution for Small Power Motor Drive Applications Such as Fans and Pumps.
- XNM50550AT/ATS由6个MOSFET、3个HVIC、3个自举二极管和1个NTC组成，紧凑高绝缘并具有优化的热性能。
XNM50550AT/ATS Contains Six MOSFETs, Three Half-Bridge Gate Drive HVICs, Three Bootstrap Diodes and a NTC in a Compact Package Fully Isolated and Optimized for Thermal Performance.
- XNM50550AT/ATS通过优化开关速度和减小寄生电感实现低电磁干扰（EMI）特性。
XNM50550AT/ATS Features Low Electromagnetic Interference (EMI) Characteristics Through Optimizing Switching Speed and Reducing Parasitic Inductance.
- XNM50550AT/ATS使用MOSFET比使用IGBT更坚固耐用，具有更大的安全工作区（SOA）。
Since XNM50550AT/ATS Employs MOSFETs as Power Switches, It Provides Much More Ruggedness and Larger Safe Operating Area (SOA) than IGBT-Based Power Modules.
- XNM50550AT/ATS内置于电机的应用和要求紧凑安装の場合。
XNM50550AT/ATS is the Right Solution for Compact and Reliable Inverter Designs Where the Assembly Space is Constrained.

主要特点

- 内置6个500V/1.2Ω MOSFET和3个半桥栅极驱动（HVIC）
- 3个独立的MOSFET源极副直流端用于变频器电流检测的应用
- HVIC实现驱动和欠压保护功能
- 完全兼容3.3V和5V的MCU接口，高电平有效
- 优化并采用了低电磁干扰设计
- 绝缘级别1500V_{rms}/1min
- 内置负温度系数的电阻用于温度检测
- 封装内置自举二极管
- 符合ROHS

应用


- 小功率电机

Features


- 500 V R_{DS(on)}= 1.2Ω MOSFET 3-Phase Inverter Including HVICs
- Three Separate Open-Source Pins from Low Side MOSFETs for Three Leg Current Sensing
- HVIC for Gate Driving and Undervoltage Protection
- Active-High Interface, Can Work With 3.3 V / 5 V Logic
- Optimized for Low Electromagnetic Interference
- Isolation Voltage Rating of 1500 V_{rms} for 1 min.
- Temperature feedback via NTC
- Embedded Bootstrap Diode in the Package
- ROHS Compliant

Applications

- Small Power AC Motor

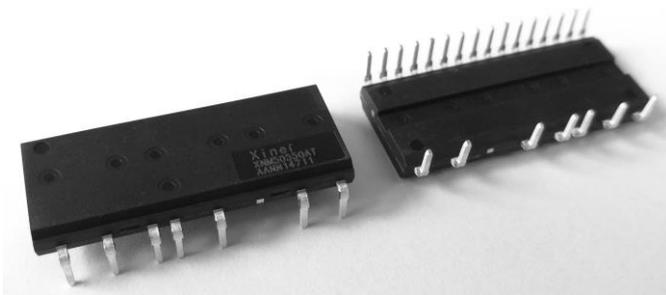

IPM-DIP23

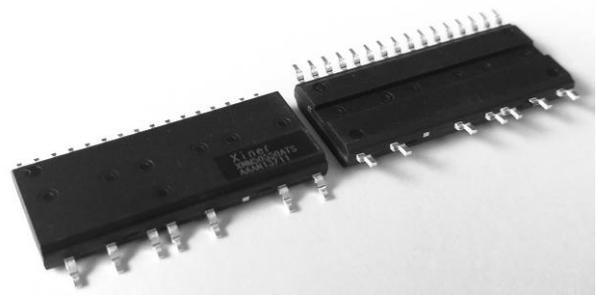

IPM-SOP23

绝对最大额定值 / Absolute Maximum Ratings

逆变器部分(单个MOSFET, 除非另有说明) / Inverter Part (Each MOSFET ® Unless Otherwise Specified)

符号/Symbol	参数/Parameter	工作条件/ Conditions	额定值/Rating	单位/Unit
V_{PN}	加在P-N之间的电源电压 DC Link Input Voltage		500	V
* I_{D25}	单个MOSFET漏极持续电流 Each MOSFET Drain Current, Continuous	$T_C = 25^\circ\text{C}$	2.0	A
* I_{D80}	单个MOSFET漏极持续电流 Each MOSFET Drain Current, Continuous	$T_C = 80^\circ\text{C}$	1.5	A
* I_{DP}	单个MOSFET漏极峰值电流 Each MOSFET Drain Current, Peak	$T_C = 25^\circ\text{C}$, $PW < 100 \mu\text{s}$	5.0	A
* I_{DRMS}	单个MOSFET漏极电流有效值 Each MOSFET Drain Current, Rms	$T_C = 80^\circ\text{C}$, $F_{PWM} < 20 \text{KHz}$	1.1	A_{rms}
* P_D	最大功耗 Maximum Power Dissipation	$T_C = 25^\circ\text{C}$, For Each MOSFET	14.5	W

控制部分(单个HVIC, 除非另有说明) / Control Part (Each HVIC Unless Otherwise Specified)

符号/Symbol	参数/Parameter	工作条件/ Conditions	额定值/Rating	单位/Unit
V_{CC}	控制电源电压 Control Supply Voltage	施加在 V_{CC} 和COM之间 Applied Between V_{CC} and COM	20	V
V_{BS}	高端偏置电压 High-side Bias Voltage	施加在 V_B 和 V_S 之间 Applied Between V_B and V_S	20	V
V_{IN}	输入信号电压 Input Signal Voltage	施加在IN和COM之间 Applied Between IN and COM	$-0.3 \sim V_{CC} + 0.3$	V

自举二极管部分(单个二极管, 除非另有说明) / Bootstrap Diode Part (Each Bootstrap Diode Unless Otherwise Specified)

符号/Symbol	参数/Parameter	工作条件/ Conditions	额定值/Rating	单位/Unit
V_{RRMB}	最大重复反向电压 Maximum Repetitive Reverse Voltage		500	V
* I_{FB}	正向电流 Forward Current	$T_C = 25^\circ\text{C}$	0.5	A
* I_{FPB}	正向电流(峰值) Forward Current (Peak)	$T_C = 25^\circ\text{C}$, Under 1ms Pulse Width	1.5	A

热阻 / Thermal Resistance

符号/Symbol	参数/Parameter	工作条件/ Conditions	额定值/Rating	单位/Unit
$R_{\theta JC}$	节点-壳体热阻 Junction to Case Thermal Resistance	逆变器工作条件下的单个MOSFET (注1) Each MOSFET under Inverter Operating Condition (Note 1)	8.6	$^\circ\text{C}/\text{W}$

整个系统 / Total System

符号/Symbol	参数/Parameter	工作条件/ Conditions	额定值/Rating	单位/Unit
T_J	工作结温 Operating Junction Temperature		$-40 \sim 150$	$^\circ\text{C}$
T_{STG}	存储温度 Storage Temperature		$-40 \sim 125$	$^\circ\text{C}$
V_{ISO}	绝缘电压 Isolation Voltage	60Hz, 正弦波, 1分钟, 连接基板到引脚 60 Hz, Sinusoidal, 1 minute, Connection Pins to Heatsink	1500	V_{rms}

注 / Note:

- 关于壳体温度(T_C)的测量点, 参见图6。 / For the Measurement Point of Case Temperature T_C , Please refer to Figure 6.
- 标记“*”的为计算值或设计因素。 / Marking “*” is Calculation Value or Design Factor

引脚描述 / Pin descriptions

引脚号/Pin Number	引脚名/Pin Name	引脚描述/ Pin Description
1	COM	IC公共电源接地 IC Common Supply Ground
2	$V_{B(U)}$	U相高端MOSFET驱动的偏压 Bias Voltage for U Phase High Side MOSFET Driving
3	$V_{CC(U)}$	U相IC和低端MOSFET驱动的偏压 Bias Voltage for U Phase IC and Low Side MOSFET Driving
4	$IN_{(UH)}$	U相高端的信号输入 Signal Input for U Phase High-Side
5	$IN_{(UL)}$	U相低端的信号输入 Signal Input for U Phase Low-Side
6	N.C	无连接 N.C
7	$V_{B(V)}$	V相高端MOSFET驱动的偏压 Bias Voltage for V Phase High Side MOSFET Driving
8	$V_{CC(V)}$	V相IC和低端MOSFET驱动的偏压 Bias Voltage for V Phase IC and Low Side MOSFET Driving
9	$IN_{(VH)}$	V相高端的信号输入 Signal Input for V Phase High-Side
10	$IN_{(VL)}$	V相低端的信号输入 Signal Input for V Phase Low-Side
11	V_{TH}	热敏电阻电压 NTC Voltage
12	$V_{B(W)}$	W相高端MOSFET驱动的偏压 Bias Voltage for W Phase High Side MOSFET Driving
13	$V_{CC(W)}$	W相IC和低端MOSFET驱动的偏压 Bias Voltage for W Phase IC and Low Side MOSFET Driving
14	$IN_{(WH)}$	W相高端的信号输入 Signal Input for W Phase High-Side
15	$IN_{(WL)}$	W相低端的信号输入 Signal Input for W Phase Low-Side
16	N.C	无连接 N.C
17	P	直流输入正端 Positive DC-Link Input
18	U, $V_{S(U)}$	高端MOSFET驱动的U相偏压接地输出 Output for U Phase & Bias Voltage Ground for High Side MOSFET Driving
19	N_U	U相的直流输入负端 Negative DC-Link Input for U Phase
20	N_V	V相的直流输入负端 Negative DC-Link Input for V Phase
21	V, $V_{S(V)}$	高端MOSFET驱动的V相偏压接地输出 Output for V Phase & Bias Voltage Ground for High Side MOSFET Driving
22	N_W	W相的直流输入负端 Negative DC-Link Input for W Phase
23	W, $V_{S(W)}$	高端MOSFET驱动的W相偏压接地输出 Output for W Phase & Bias Voltage Ground for High Side MOSFET Driving

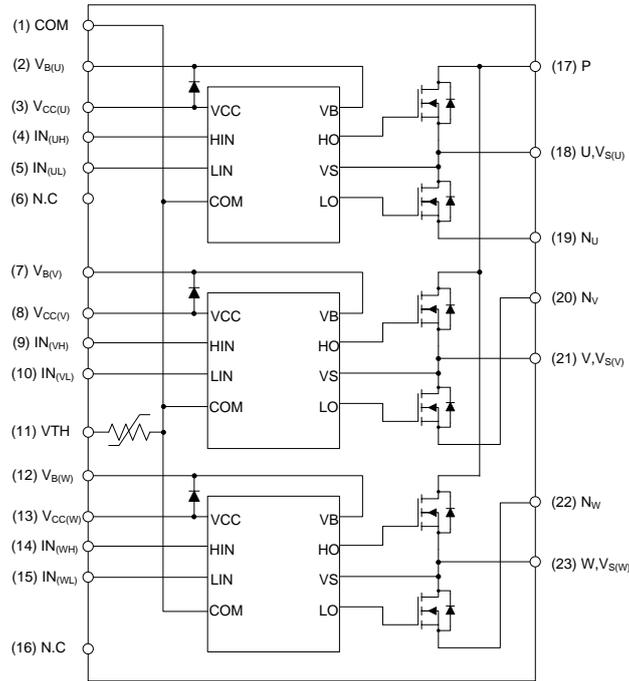


图1. 引脚布局和内部框图（仰视图）

Figure 1. Pin Configuration and Internal Block Diagram (Bottom View)

注 / Note:

每个低端MOSFET的源极端子与IPM中的电源接地或偏压接地不连接。

Source Terminal of Each Low-Side MOSFET is Not Connected to Supply Ground or Bias Voltage Ground Inside IPM.

外部连接应当如图5所示。

External Connections Should be Made as Indicated in Figure 5.

电气特性 ($T_J = 25^\circ\text{C}$, $V_{CC} = V_{BS} = 15\text{ V}$, 除非另有说明) / Electrical Characteristics ($T_J = 25^\circ\text{C}$, $V_{CC} = V_{BS} = 15\text{ V}$ Unless Otherwise Specified)

逆变器部分 (单个MOSFET, 除非另有说明) / Inverter Part (Each MOSFET Unless Otherwise Specified)

符号/Symbol	参数/Parameter	工作条件/ Conditions	最小值 /Min	典型值 /Typ	最大值 /Max	单位 /Unit
BV_{DSS}	漏极-源极击穿电压 Drain-Source Breakdown Voltage	$V_{IN} = 0\text{ V}$, $I_D = 1\text{ mA}$ (Note 1)	500	-	-	V
I_{DSS}	零栅极电压漏极电流 Zero Gate Voltage Drain Current	$V_{IN} = 0\text{ V}$, $V_{DS} = 500\text{ V}$	-	-	1	mA
$R_{DS(on)}$	漏极-源极静态导通电阻 Static Drain-Source On-Resistance	$V_{CC} = V_{BS} = 15\text{ V}$, $V_{IN} = 5\text{ V}$, $I_D = 1.2\text{ A}$	-	1.2	1.6	Ω
V_{SD}	漏极-源极二极管正向导通电压 Drain-Source Diode Forward Voltage	$V_{CC} = V_{BS} = 15\text{ V}$, $V_{IN} = 0\text{ V}$, $I_D = -1.2\text{ A}$	-	0.8	1.2	V
t_{ON}	开关时间 Switching Times	$V_{PN} = 300\text{ V}$, $V_{CC} = V_{BS} = 15\text{ V}$, $I_D = 1.2\text{ A}$ $V_{IN} = 0\text{ V} \leftrightarrow 5\text{ V}$, 电感负载 / Inductive Load $L = 3\text{ mH}$, 高端和低端MOSFET开关(注2) / High- and Low-Side MOSFET Switching (Note 2)	-	420	-	ns
t_{OFF}			-	600	-	ns
t_{rr}			-	60	-	ns
E_{ON}			-	30	-	μJ
E_{OFF}			-	4	-	μJ
RBSOA	反向偏压安全工作区 Reverse-Bias Safe Operating Area	$V_{PN} = 400\text{ V}$, $V_{CC} = V_{BS} = 15\text{ V}$, $I_D = I_{DP}$, $V_{DS} = BV_{DSS}$, $T_J = 150^\circ\text{C}$, 高端和低端MOSFET开关(注3) / High- and Low-Side MOSFET Switching (Note 3)	整个区域 Full Square			

控制部分(单个 HVIC, 除非另有说明) / Control Part(Each HVIC Unless Otherwise Specified)

符号/Symbol	参数/Parameter	工作条件/ Conditions		最小值 /Min	典型值 /Typ	最大值 /Max	单位 /Unit
I_{QCC}	V_{CC} 静态电流 Quiescent V_{CC} Current	$V_{CC}=15\text{ V}$, $V_{IN}=0\text{ V}$	施加在 V_{CC} 和COM之间 Applied Between V_{CC} and COM	-	220	300	μA
I_{QBS}	V_{BS} 静态电流 Quiescent V_{BS} Current	$V_{BS}=15\text{ V}$, $V_{IN}=0\text{ V}$	施加在 $V_{B(U)-U}$, $V_{B(V)-V}$, $V_{B(W)-W}$ Applied Between $V_{B(U)-U}$, $V_{B(V)-V}$, $V_{B(W)-W}$	-	55	100	μA
UV_{CCD}	低端欠压保护 (图8) Low-Side Undervoltage Protection (Figure 8)	V_{CC} 欠压保护检测电平 V_{CC} Undervoltage Protection Detection Level		7.4	8.0	9.4	V
UV_{CCR}		V_{CC} 欠压保护复位电平 V_{CC} Undervoltage Protection Reset Level		8.0	8.9	9.8	V
UV_{BSD}	高端欠压保护 (图9) High-Side Undervoltage Protection (Figure 9)	V_{BS} 欠压保护检测电平 V_{BS} Undervoltage Protection Detection Level		7.4	8.0	9.4	V
UV_{BSR}		V_{BS} 欠压保护复位电平 V_{BS} Undervoltage Protection Reset Level		8.0	8.9	9.8	V
V_{IH}	导通阈值电压 ON Threshold Voltage	逻辑高电平 Logic High Level	施加在 V_{IN} 和COM之间 Applied between IN and COM	-	-	2.9	V
V_{IL}	关断阈值电压 OFF Threshold Voltage	逻辑低电平 Logic Low Level		0.8	-	-	V

自举二极管部分(单个二极管, 除非另有说明) / Bootstrap Diode Part(Each Bootstrap Diode Unless Otherwise Specified)

符号/Symbol	参数/Parameter	工作条件/ Conditions		最小值 /Min	典型值 /Typ	最大值 /Max	单位 /Unit
V_{FB}	正向电压 Forward Voltage	$I_F=0.1\text{ A}$, $T_C=25^\circ\text{C}$ (注 5) $I_F=0.1\text{ A}$, $T_C=25^\circ\text{C}$ (Note 5)		-	4.5	-	V
t_{rrB}	反向恢复时间 Reverse Recovery Time	$I_F=0.1\text{ A}$, $T_C=25^\circ\text{C}$		-	80	-	ns

内部NTC(负温度系数)电阻参数/ Internal NTC – Thermistor Characteristics

符号/Symbol	参数/Parameter	工作条件/ Conditions		最小值 /Min	典型值 /Typ	最大值 /Max	单位 /Unit
R_{25}	电阻 Resistance	$T_C=25^\circ\text{C}$, $\pm 5\%$ tolerance		-	47	-	$\text{k}\Omega$
R_{125}	电阻 Resistance	$T_C=125^\circ\text{C}$ (注 6) $T_C=125^\circ\text{C}$ (Note 6)		-	1.34	-	$\text{k}\Omega$
B	B-常数(25-50°C) B-constant (25-50°C)	$\pm 2\%$ tolerance		-	4050	-	K

注/Note:

- BV_{DSS} 是IPM产品中单个MOSFET的漏极和源极端子之间的绝对最大额定电压。考虑到寄生电感, V_{PN} 应远低于该值, 因此 V_{PN} 在任何情况下不得超过 BV_{DSS} 。
 BV_{DSS} is the Absolute Maximum Voltage Rating Between Drain and Source Terminal of Each MOSFET Inside IPM. V_{PN} Should be Sufficiently Less Than This Value Considering the Effect of the Stray Inductance so that V_{DS} Should Not Exceed BV_{DSS} in Any Case.
- t_{ON} 和 t_{OFF} 包括内部驱动IC的传输延迟。所列出的数值是在实验室条件下测得, 在实际应用中因为印刷电路板和布线的差异, 数值也会有所不同。请参阅图8介绍的开关时间定义, 以及图9中的开关测试电路。
 t_{ON} and t_{OFF} Include the Propagation Delay Time of the Internal Drive IC. Listed Values are Measured at the Laboratory Test Condition, and They Can be Different According to the Field Applications Due to the Effect of Different Printed Circuit Boards and Wirings. Please see Figure 8 for the Switching Time Definition with the Switching Test Circuit of Figure 9.
- 每个MOSFET在开关工作时的峰值电流和电压也应在安全工作区(SOA)的范围内。请参阅图7的RBSOA测试电路, 它与开关测试电路相同。
The peak current and voltage of each MOSFET during the switching operation should be included in the safe operating area (SOA). Please see Figure 7 for the RBSOA test circuit that is same as the switching test circuit.
- V_{TH} 只能用于模块的温度检测, 但不能自动关闭MOSFETs。
 V_{TH} is only for sensing temperature of module and cannot shutdown MOSFETs automatically.
- 内置自举二极管其阻抗特性约为 $30\ \Omega$ 。请参阅图2。
Built in bootstrap diode includes around $30\ \Omega$ resistance characteristic. Please refer to Figure 2.
- 内置NTC电阻阻值参数请参阅图3、4。
Internal NTC – Thermistor Characteristics, Please refer to Figure 3、4.

推荐工作条件 / Recommended Operating Condition

符号/Symbol	参数/Parameter	工作条件/ Conditions	最小值 /Min	典型值 /Typ	最大值 /Max	单位 /Unit
V_{PN}	电源电压 Supply Voltage	施加在P和N之间 Applied Between P and N	-	300	400	V
V_{CC}	控制电源电压 Control Supply Voltage	施加在 V_{CC} 和COM之间 Applied Between V_{CC} and COM	13.5	15	16.5	V
V_{BS}	高端偏压 High-Side Bias Voltage	施加在 V_B 和 V_S 之间 Applied Between V_B and V_S	13.5	15	16.5	V
$V_{IN(ON)}$	输入导通阈值电压 Input ON Threshold Voltage	施加在 V_{IN} 和COM之间 Applied Between IN and COM	3.0	-	V_{CC}	V
$V_{IN(OFF)}$	输入关断阈值电压 Input OFF Threshold Voltage		0	-	0.6	V
t_{dead}	防止桥臂直通的死区时间 Blanking Time for Preventing Arm-Short	$V_{CC}=V_{BS}= 13.5 \sim 16.5 \text{ V}$, $T_J \leq 150^\circ\text{C}$	1	-	-	us
f_{PWM}	PWM开关频率 PWM Switching Frequency	$T_J \leq 150^\circ\text{C}$	-	15	-	kHz

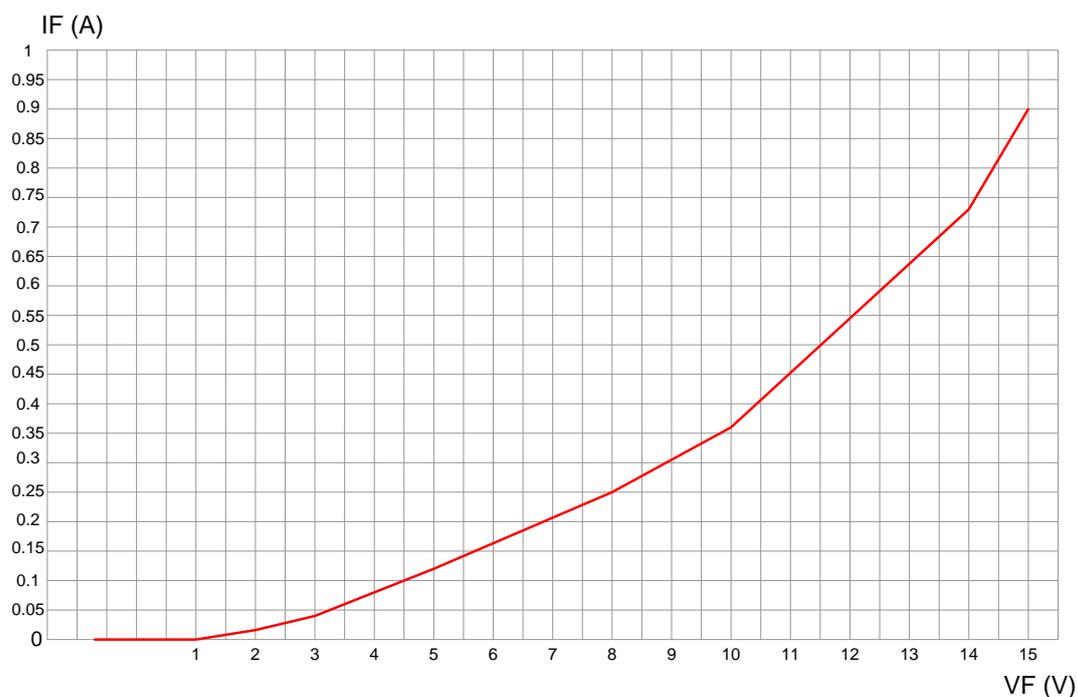
Built in Bootstrap Diode V_F - I_F Characteristic


图2. 内置自举二极管特性（典型值）

Figure 2. Built in Bootstrap Diode Characteristics (Typ.)

R25=47kΩ±5%				B25/50=4050K±2%			
Temp(°C)	Rmin(KΩ)	Rnor(KΩ)	Rmax(KΩ)	Temp(°C)	Rmin(KΩ)	Rnor(KΩ)	Rmax(KΩ)
-40	1399.615	1580.590	1780.504	3	123.714	132.962	142.544
-39	1311.659	1479.301	1664.198	4	117.799	126.478	135.458
-38	1229.811	1385.170	1556.254	5	112.197	120.344	128.760
-37	1153.607	1297.644	1456.016	6	106.890	114.538	122.427
-36	1082.623	1216.220	1362.586	7	101.862	109.043	116.439
-35	1016.468	1140.432	1276.316	8	97.095	103.839	110.773
-34	954.783	1069.857	1195.803	9	92.576	98.910	105.412
-33	897.239	1004.102	1120.885	10	88.290	94.239	100.338
-32	843.531	942.810	1051.138	11	84.224	89.813	95.533
-31	793.381	885.649	986.175	12	80.366	85.617	90.982
-30	746.531	832.315	925.637	13	76.704	81.637	86.671
-29	702.743	782.530	869.197	14	73.226	77.862	82.585
-28	661.798	736.034	816.551	15	69.924	74.281	78.712
-27	623.496	692.592	767.422	16	66.786	70.881	75.040
-26	587.648	651.984	721.554	17	63.805	67.654	71.556
-25	554.084	614.008	678.711	18	60.971	64.590	68.252
-24	522.644	578.477	638.674	19	58.277	61.679	65.116
-23	493.181	545.221	601.245	20	55.715	58.913	62.139
-22	465.559	514.079	566.237	21	53.278	56.284	59.312
-21	439.652	484.905	533.479	22	50.959	53.786	56.627
-20	415.344	457.563	502.814	23	48.752	51.410	54.077
-19	392.606	432.017	474.197	24	46.651	49.150	51.654
-18	371.245	408.047	447.374	25	44.650	47.000	49.350
-17	351.171	385.545	422.225	26	42.669	44.954	47.244
-16	332.299	364.414	398.634	27	40.784	43.007	45.238
-15	314.550	344.563	376.497	28	38.992	41.153	43.326
-14	297.850	325.907	355.716	29	37.286	39.388	41.504
-13	282.132	308.367	336.199	30	35.663	37.706	39.766
-12	267.333	291.871	317.864	31	34.119	36.104	38.110
-11	253.394	276.350	300.632	32	32.648	34.577	36.530
-10	240.260	261.741	284.431	33	31.247	33.122	35.023
-9	227.880	247.987	269.193	34	29.912	31.735	33.584
-8	216.207	235.031	254.857	35	28.641	30.412	32.211
-7	205.196	222.825	241.362	36	27.429	29.150	30.901
-6	194.807	211.319	228.657	37	26.274	27.945	29.649
-5	185.001	200.470	216.690	38	25.172	26.796	28.454
-4	175.742	190.238	205.414	39	24.122	25.700	27.312
-3	166.997	180.583	194.786	40	23.120	24.653	26.222
-2	158.735	171.471	184.765	41	22.164	23.653	25.179
-1	150.925	162.867	175.314	42	21.251	22.698	24.182
0	143.542	154.741	166.397	43	20.381	21.786	23.229
1	136.564	147.069	157.986	44	19.549	20.914	22.318
2	129.962	139.818	150.045	45	18.755	20.081	21.447

R25=47kΩ±5%				B25/50=4050K±2%			
Temp(°C)	Rmin(KΩ)	Rnor(KΩ)	Rmax(KΩ)	Temp(°C)	Rmin(KΩ)	Rnor(KΩ)	Rmax(KΩ)
46	17.997	19.285	20.613	89	3.6434	4.0283	4.4428
47	17.272	18.523	19.815	90	3.5234	3.8982	4.3021
48	16.580	17.795	19.051	91	3.4079	3.7729	4.1665
49	15.919	17.099	18.320	92	3.2966	3.6520	4.0356
50	15.286	16.432	17.621	93	3.1894	3.5355	3.9095
51	14.685	15.799	16.954	94	3.0861	3.4232	3.7877
52	14.110	15.192	16.316	95	2.9865	3.3149	3.6703
53	13.560	14.612	15.705	96	2.8906	3.2105	3.5569
54	13.035	14.056	15.119	97	2.7981	3.1098	3.4475
55	12.532	13.524	14.558	98	2.7090	3.0126	3.3419
56	12.050	13.014	14.021	99	2.6230	2.9189	3.2400
57	11.589	12.526	13.505	100	2.5401	2.8284	3.1416
58	11.148	12.059	13.011	101	2.4602	2.7411	3.0465
59	10.726	11.611	12.537	102	2.3831	2.6568	2.9547
60	10.321	11.181	12.082	103	2.3087	2.5755	2.8660
61	9.9340	10.770	11.646	104	2.2369	2.4970	2.7803
62	9.5628	10.375	11.228	105	2.1676	2.4211	2.6975
63	9.2071	9.9964	10.826	106	2.1007	2.3478	2.6175
64	8.8661	9.6333	10.441	107	2.0361	2.2771	2.5402
65	8.5393	9.2850	10.071	108	1.9738	2.2087	2.4654
66	8.2259	8.9508	9.7153	109	1.9136	2.1427	2.3932
67	7.9253	8.6301	9.3740	110	1.8555	2.0789	2.3233
68	7.6370	8.3222	9.0462	111	1.7994	2.0172	2.2557
69	7.3605	8.0266	8.7312	112	1.7452	1.9576	2.1904
70	7.0951	7.7428	8.4285	113	1.6928	1.8999	2.1271
71	6.8404	7.4702	8.1376	114	1.6421	1.8442	2.0660
72	6.5959	7.2083	7.8579	115	1.5932	1.7903	2.0068
73	6.3611	6.9567	7.5891	116	1.5459	1.7382	1.9496
74	6.1357	6.7150	7.3305	117	1.5002	1.6878	1.8942
75	5.9193	6.4826	7.0819	118	1.4560	1.6391	1.8405
76	5.7113	6.2593	6.8427	119	1.4133	1.5919	1.7886
77	5.5115	6.0446	6.6125	120	1.3720	1.5463	1.7383
78	5.3196	5.8381	6.3911	121	1.3321	1.5021	1.6897
79	5.1351	5.6395	6.1780	122	1.2934	1.4594	1.6425
80	4.9577	5.4485	5.9728	123	1.2560	1.4180	1.5969
81	4.7880	5.2656	5.7763	124	1.2198	1.3780	1.5527
82	4.6248	5.0896	5.5870	125	1.1848	1.3392	1.5099
83	4.4679	4.9202	5.4047	126	1.1510	1.3016	1.4684
84	4.3170	4.7572	5.2292	127	1.1182	1.2653	1.4282
85	4.1717	4.6002	5.0600	128	1.0864	1.2301	1.3892
86	4.0320	4.4491	4.8971	129	1.0557	1.1960	1.3514
87	3.8975	4.3036	4.7400	130	1.0260	1.1629	1.3148
88	3.7681	4.1634	4.5887				

图3. R-T表
 Figure 3. R-T Table

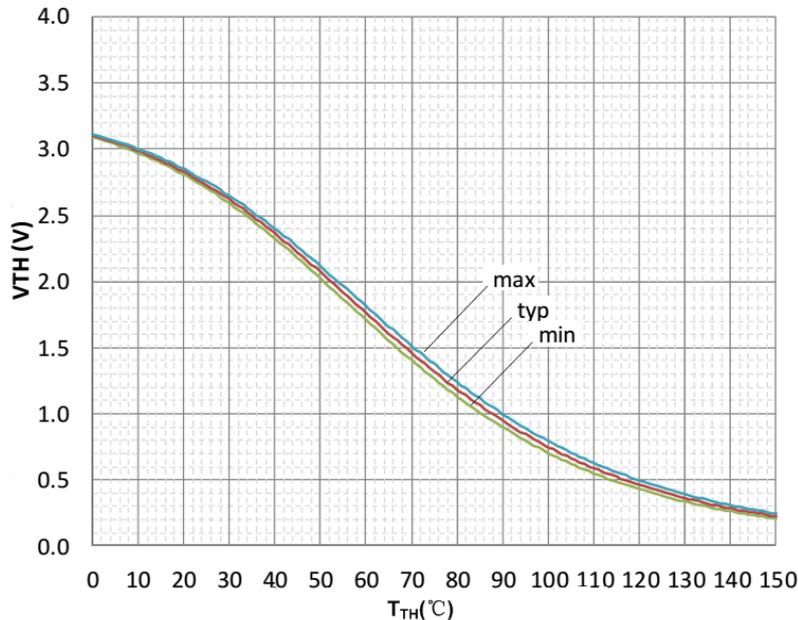


图4. V_{TH} vs T_{TH} , V_{TH} 通过9.76 KΩ (1%, 100ppm)的电阻上拉至3.3的 V_{DD} , 推荐电压波动为1%
 Figure13. V_{TH} vs T_{TH} with V_{TH} pin pulled up to V_{DD} with a 9.76KΩ (1%, 100ppm) resistor.
 A 3.3V, 1% variation in V_{DD} is assumed.

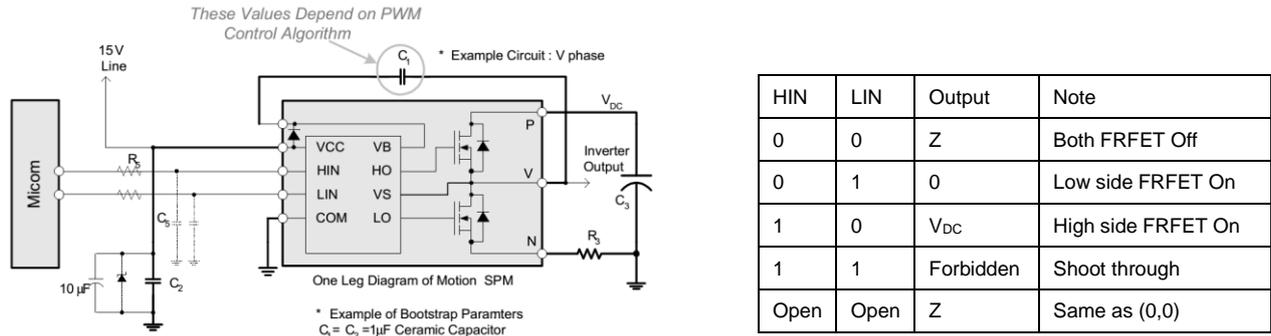


图5. 推荐的MCU接口和自举电路及其参数

Figure 5. Recommended MCU Interface and Bootstrap Circuit with Parameters

注/Note:

- 自举电路的参数取决于PWM算法。上述为开关频率15K时的参数的典型例子。
 Parameters for Bootstrap Circuit Elements are Dependent on PWM Algorithm. For 15 kHz of Switching Frequency, Typical Example of Parameters is Shown Above.
- IPM产品和MCU（虚线显示部分）的每个输入端的RC耦合（R5和C5）和C4，可用于防止由浪涌噪声产生的错误信号。
 RC coupling (R5 and C5) and C4 at Each Input of IPM and Mcu (Indicated as Dotted Lines) May be Used to Prevent Improper Signal Due to Surge Noise.
- 印刷电路板图形中的粗线应尽量短且粗，以减小电路中的寄生电感，从而导致浪涌电压的降低。旁路电容C1，C2和C3应具有良好的高频特性，以吸收高频纹波电流。
 Bold lines should be short and thick in PCB pattern to have small stray inductance of circuit, which results in the reduction of surge voltage. Bypass capacitors such as C1, C2 and C3 Should Have Good High-Frequency characteristics to Absorb High-Frequency Ripple Current.

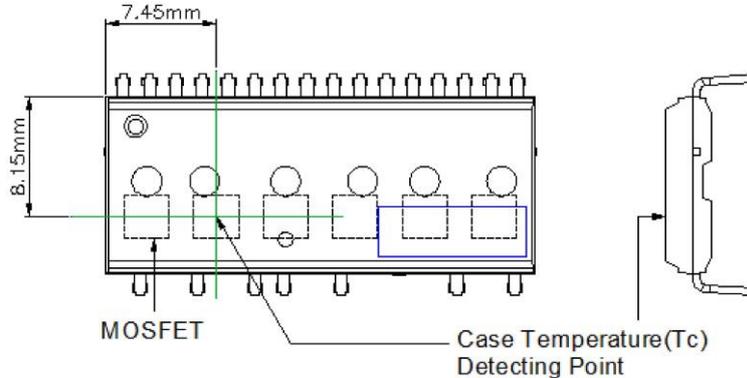


图6. 壳体温度测量

Figure 6. Case Temperature Measurement

注/Note:

将热电偶贴在IPM封装（如果应用到，放在IPM封装和散热器中间）的散热片的顶部，以获得正确的温度测量数值。
 Attach the thermocouple on top of the heatsink-side of IPM (between IPM and heatsink if applied) to get the correct temperature measurement.

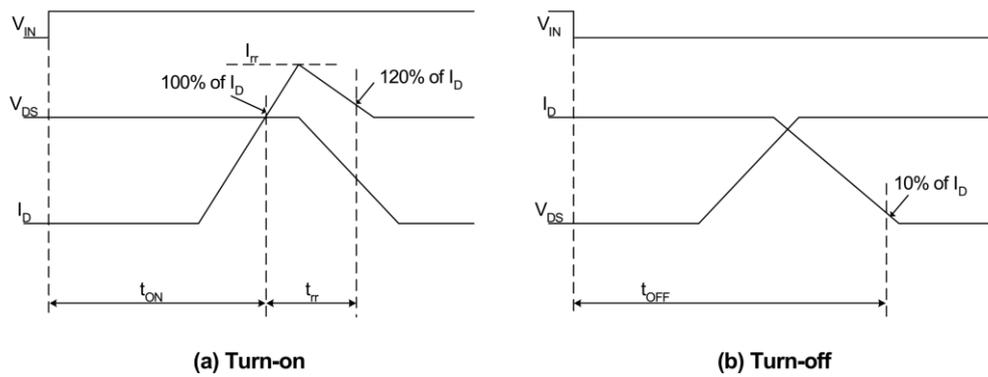


图7. 开关时间定义
 Figure 7. Switching Time Definitions

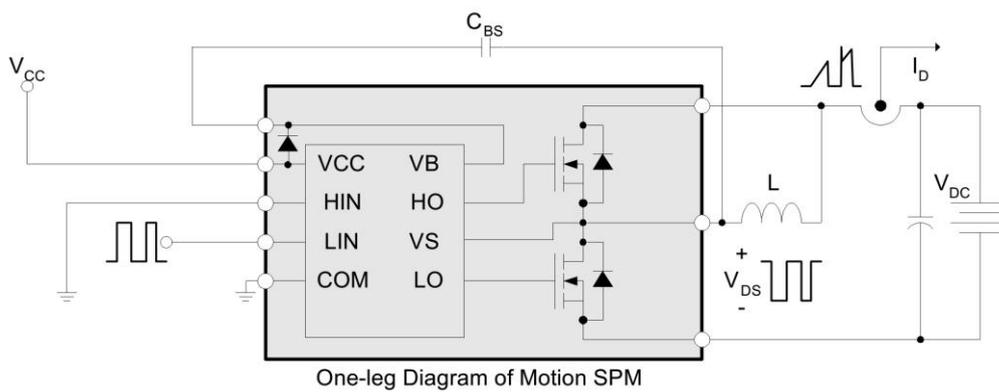


图8. 开关和RBSOA (单脉冲) 测试电路 (低端)
 Figure 8. Switching and RBSOA (Single-pulse) Test Circuit (Low-side)

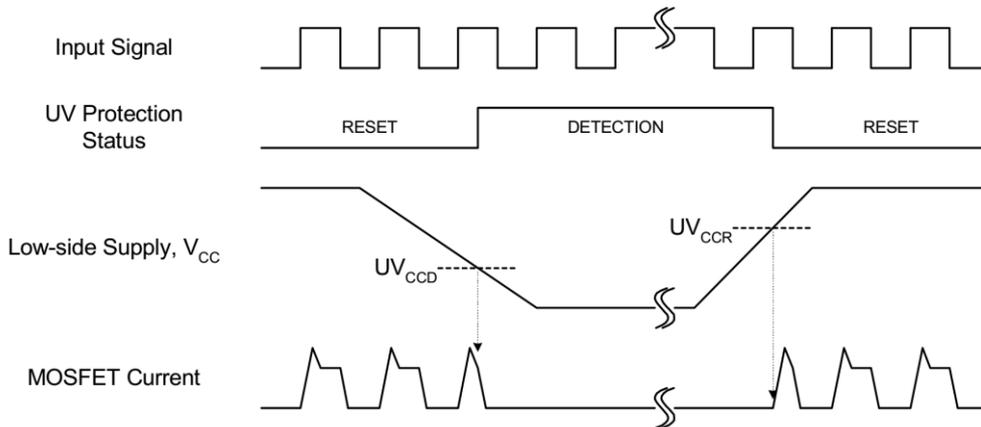


图9. 欠压保护（低端）
Figure 9. Undervoltage Protection (Low-side)

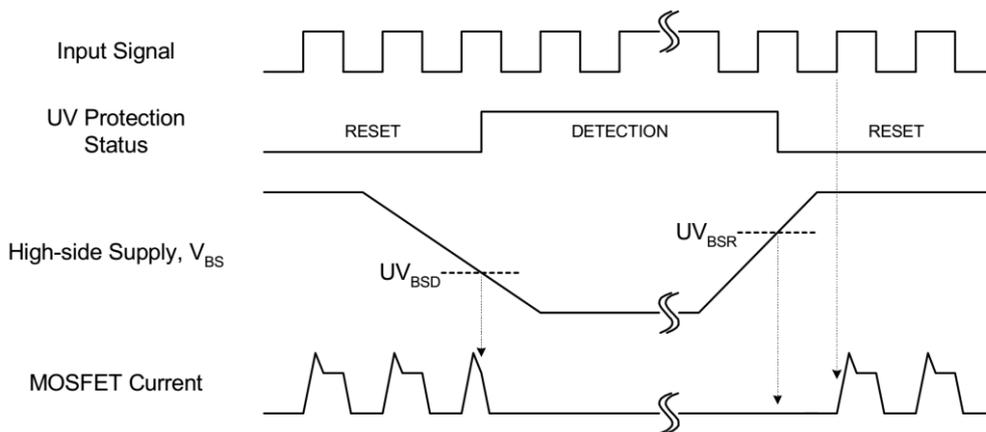


图10. 欠压保护（高端）
Figure 10. Undervoltage Protection (High-side)

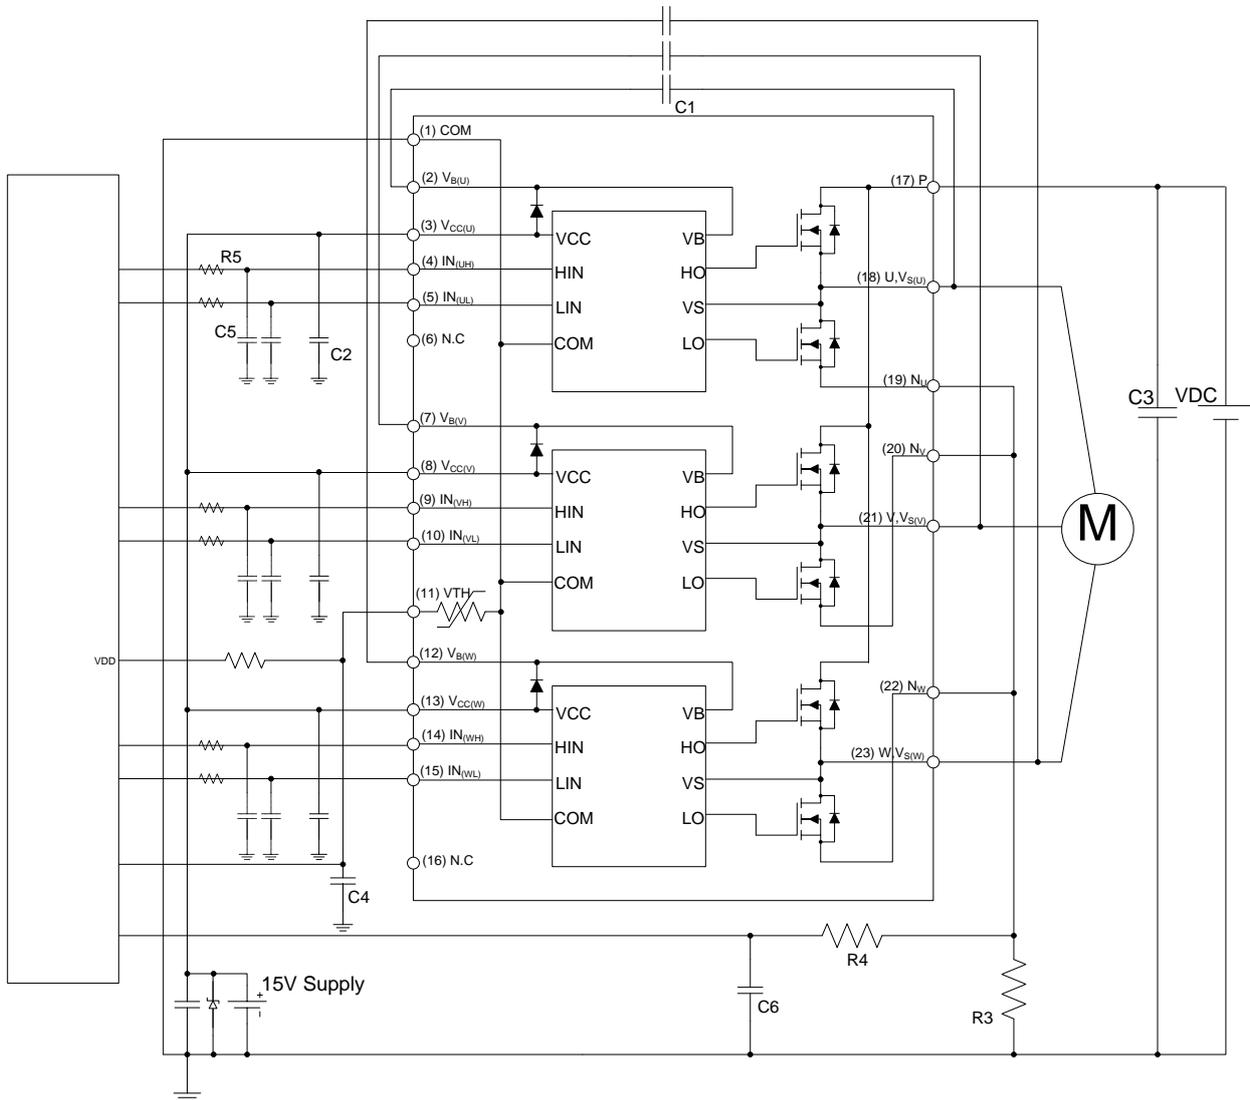


图11. 应用电路实例

Figure 11. Example of Application Circuit

注/Note:

- 关于引脚的位置请参阅图1。
About Pin Position, Refer to Figure 1.
- IPM产品和MCU的每个输入端的RC耦合 (R₅和C₅, R₄和C₆) 和C₄, 能有效地防止由浪涌噪声产生的错误的输入信号。
RC Coupling (R₅ and C₅, R₄ and C₆) and C₄ at Each Input of IPM Mcu are Useful to Prevent Improper Input Signal Caused by Surge Noise.
- 由于位于COM和低端MOSFET的源极端子之间, R₃的压降会影响低端的开关性能和自举特性。为此稳态情况下的R₃的压降应小于1V。
The voltage Drop Across R₃ Affects the Low Side Switching Performance and the Bootstrap Characteristics Since it is Placed Between COM and the Source Terminal of the Low Side MOSFET. For this Reason, the Voltage Drop Across R₃ Should Be Less Than 1 V in the Steady-State.
- 为避免浪涌电压和HVIC故障, 接地线和输出端子之间的接线应短且粗。
Ground Wires and Output Terminals, Should Be Thick and Short in Order to Avoid Surge Voltage and Malfunction of HVIC.
- 所有的滤波电容器应紧密连接到IPM产品, 他们应当具有能够很好的阻挡高频纹波电流的特性。
All the Filter Capacitors Should Be Connected Close to Motion SPM, and They Should Have Good Characteristics for Rejecting High-Frequency Ripple Current.

轮廓封装详图 / Detailed Package Outline Drawings


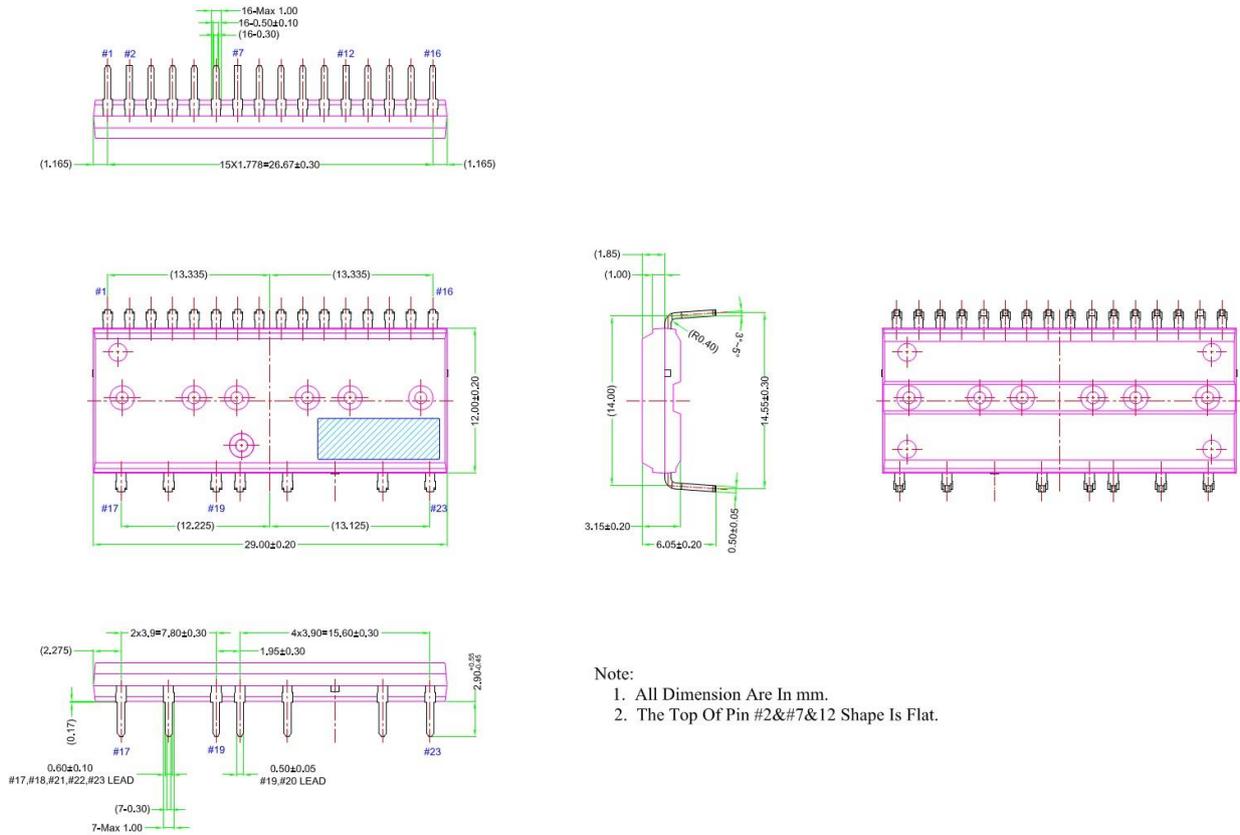


图12. IPM-DIP23
Figure 12. IPM-DIP23

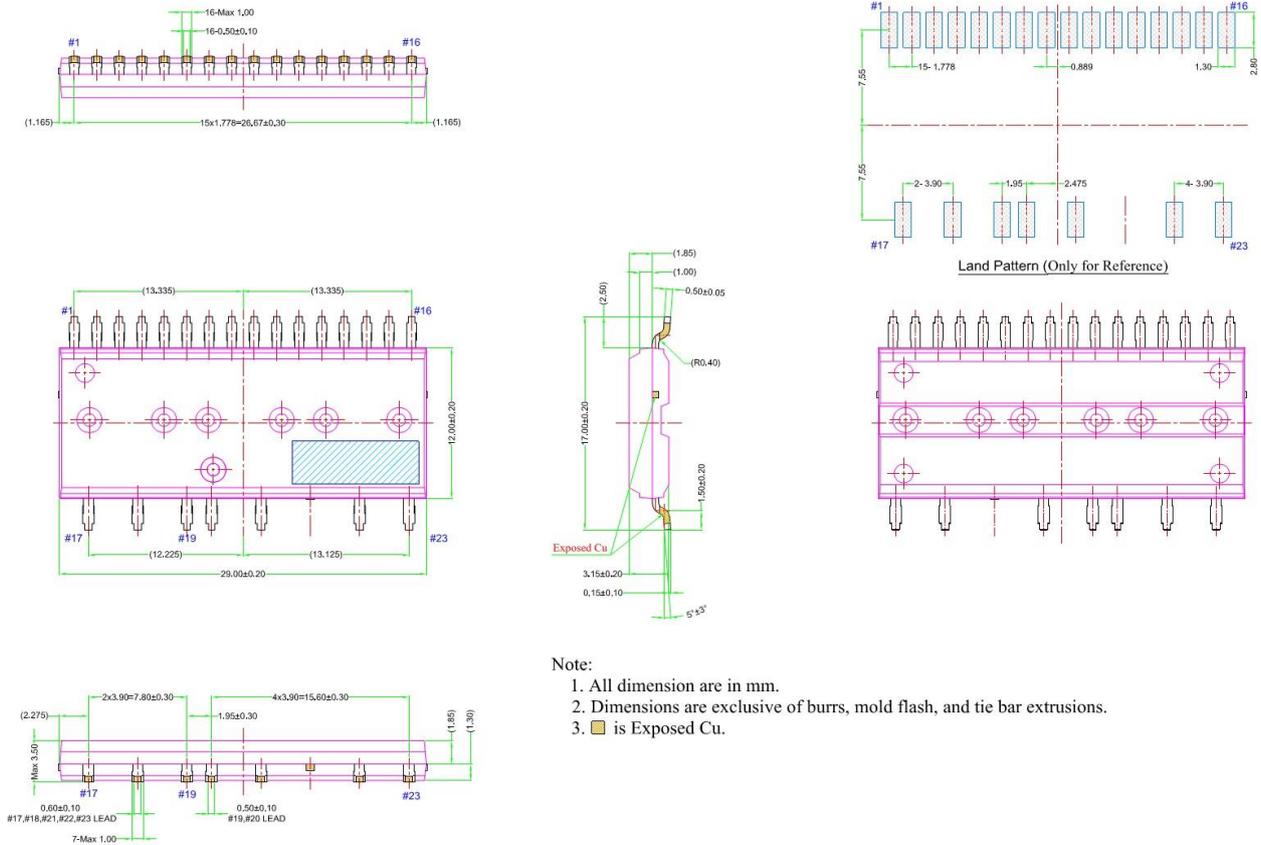

Note:

1. All dimension are in mm.
2. Dimensions are exclusive of burrs, mold flash, and tie bar extrusions.
3. is Exposed Cu.

图13. IPM-SOP23
Figure 13. IPM-SOP23

封装打标和订货信息/Package Marking & Ordering Information

Device Marking	Device	Package	Reel Size	Packing Type	Quantity
XNM50550AT	XNM50550AT	IPM-DIP23	-	RAIL	15
XNM50550ATS	XNM50550ATS	IPM-SOP23	-	RAIL	15

The information provided in this document is believed to be accurate and reliable. However, Xiner assumes no responsibility for the consequences of the use of this information. Xiner assumes no responsibility for any infringement of patents or of other rights of third parties which may result from the use of this information. No license is granted by implication or otherwise under any patent or patent rights of Xiner. The specifications mentioned in this document are subject to change without notice. This document supersedes and replaces all information previously supplied.

For technical support, please contact Xiner's Technical Assistance Center

www.invsemi.com

WORLD HEADQUARTERS: