

#### **FEATURES**

- High power, Extremely Lower ESR, high energy density
- Long cycle life
- Maintenance-free
- No Explosion Safety
- RoHS Directive Compliant

#### **APPLICATIONS**

Power Holdup Modules, Energy Harvesting,
 UPS/Industrial, Robotic Power, High Pulse Current
 Applications Emergency car energy storage.

### **OPERATING TEMPERATURE RANGE**

- -40°C to +65°C @2.7V
- -40°C to +85°C @2.1V



#### **GENERAL SPECIFICATIONS**

Item	Performance			
Operating temperature	-40°C to +65°C			
Capacitance range	1.0F to 600F			
Capacitance tolerance	-0%~+100%;-10%~+30%;-0%~+30%			
Rated voltage	2.7 V / 3.0V			
Surge voltage	2.85 V / 3.15V			
Temperature characteristics	Capacitance change: Within ±30% of initial measured value at +25°C Internal resistance: Within ±200% of initial measured value at +25°C			
High temperature load time	After 65°C 1500 hours (at 2.7V): Capacitance change: ±30% of initial rated value Internal resistance: Within 3 times of initial specified value			
Projected cycle life (From rated voltage to 1/2 rated voltage at 25°C)	After 500,000 cycles: Capacitance change: Within ±30 % of initial rated value Internal resistance: Within 2 times of initial specified value			
Humidity characteristic	Relative humidity: 90%~95% /Duration of testing:240 hrs /Temperature:40±2°C Capacitance change: Within ±30 % of initial rated value Internal resistance: Within 2 times of initial specified value			
Vibration resistance	Amplitude:1.5mm /Frequency:10~55Hz /X,Y,Z(2hrs)/Duration of testing:6 hrs  Capacitance change: Within ±30 % of initial rated value  Internal resistance: Within 2 times of initial specified value			
Shelf life	After 2 years at 25°C without load, the capacitor shall meet the specified endurance limits.			











# **New Lower ESR Series**

www.cda-cap.com

#### **DIMENSIONS**


#### **RADIAL LEAD TYPE**

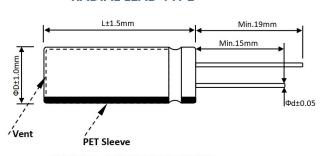




Size(mm)						
ΦD	Р	Фd				
8	3.5	0.6				
10	5.0	0.6				
12.5	5.0	0.6				
16	7.5	0.8				
18	8.0	0.8				

#### **RADIAL BENT LEAD TYPE**

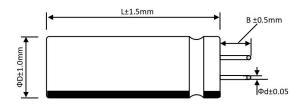





Style	B(mm)
A1	4.0
C1	2.0


### SOLDER PIN TYPE 2-PIN 100~600F PART


### **Terminal Z2 type**

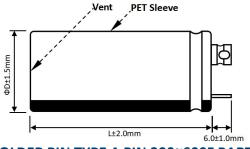




# SOLDER PIN TYPE 4-PIN 300~600F PART Terminal L4 type

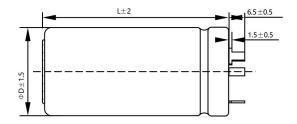





# **SOLDER PIN TYPE 4-PIN 400F PART**

# Terminal Z4 type

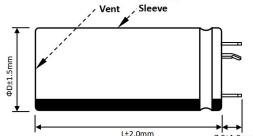









# **New Lower ESR Series**


www.cda-cap.com


### STANDARD PRODUCTS


Port Name have	Working		Dimensions (mm)	Max.E	SR	Maximum	Maximum	Maximum	Power	Maximum	Energy
Part Number Voltage (V DC)	Cap. (F)	DxL	ESRAC (1kHz/mΩ)	ESRDC (mΩ)	Leakage (72hrs/mA)	Peak Current(A)	Endurance Current(A)	Density (W/Kg)	Energy (W.h)	Density (Wh/kg)	
			<u> </u>		Radia	l Lead		'		<u>'</u>	
CHQ-2R7105R-TW	2.7	1	8x12	140	325	0.006	1.16	0.57	2833	0.0010	1.07
CHQ-2R7205R-TW	2.7	2	8x16	90	135	0.013	2.13	0.71	5945	0.0020	1.86
CHQ-2R7335R-TW	2.7	3.3	8x20	60	145	0.012	3.37	0.93	4161	0.0033	2.30
CHQ-2R7505R-TWX	2.7	5	8x25	55	83	0.020	4.78	1.11	6312	0.0051	3.01
CHQ-2R7505R-TW	2.7	5	10x20	27	65	0.015	5.19	1.19	6943	0.0051	2.41
CHQ-2R7705R-TW	2.7	7	10x25	30	45	0.030	7.19	1.70	7477	0.0071	2.73
CHQ-2R7106R-TWQ	2.7	10	10x30	20	55	0.030	8.71	2.02	5131	0.0101	3.27
CHQ-2R7106R-TWX	2.7	10	12.5x20	25	38	0.035	9.82	1.91	6762	0.0101	2.94
CHQ-2R7256R-TW	2.7	25	16x25	15	25	0.060	20.77	2.41	4793	0.0253	3.47
CHQ-2R7506R-TW	2.7	50	18x40	9	15	0.075	38.57	3.96	4486	0.0506	3.89
				SOL	DER PIN	N TYPE 2-PIN					
CHQ-2R7107R-TW	2.7	100	22x45	6.00	10.00	0.26	67.50	11.81	3803	0.1013	4.40
CHQ-2R7127R-TW	2.7	120	22x50	6.00	8.00	0.30	82.65	13.05	4050	0.1215	4.50
CHQ-2R7187R-TW	2.7	180	25x50	7.00	10.0	0.60	86.79	15.75	2955	0.1823	6.16
CHQ-2R7227R-TW	2.7	220	30x50	5.00	6.00	0.62	128.02	17.92	3038	0.2228	4.64
CHQ-2R7357R-TW	2.7	350	35x60	2.50	3.00	1.00	230.40	24.20	4550	0.3545	5.53
CHQ-2R7407R-TW	2.7	400	35x60	2.30	2.70	1.00	259.60	25.75	4620	0.4050	5.78
CHQ-2R7507R-TW	2.7	500	35x65	2.40	2.90	1.30	275.50	26.90	3770	0.5063	6.32
CHQ-2R7607R-TW	2.7	600	35x70	2.50	3.00	1.50	289.20	30.77	3470	0.6075	7.20
				SOLE	DER PIN	TYPE L4-PIN	I				
CHQ-2R7307R-TW	2.7	300	35x60	1.60	2.20	1.00	258.10	24.44	5321	0.3038	4.05
CHQ-2R7367R-TW	2.7	360	35x65	1.30	2.00	1.20	299.87	24.64	5264	0.3544	4.88
CHQ-2R7407R-TW	2.7	400	35x70	1.20	1.60	1.30	329.59	28.52	5957	0.4050	4.40
CHQ-2R7507R-TW	2.7	500	35x85	1.10	1.40	1.50	397.41	33.26	6021	0.5063	4.87
CHQ-2R7607R-TW	2.7	600	35x85	1.10	1.40	1.50	440.65	34.09	5907	0.6075	5.73
SOLDER PIN TYPE Z4-PIN											
CHQ-2R7407R-TWQ	2.7	400	35x66	2.50	2.90	1.00	270.0	22.20	4544	0.4050	5.26
	SOLDER PIN TYPE L4-PIN (3.0V)										
CHQ-3R0307R-TW	3.0	300	35x60	1.4	2.2	1.00	271.18	22.70	6550	0.3750	5.00
CHQ-3R0367R-TW	3.0	360	35x65	1.3	2.0	1.20	313.82	24.64	6578	0.4500	5.49
CHQ-3R0407R-TW	3.0	400	35x70	1.2	1.6	1.30	366.21	28.52	7436	0.5000	5.49
CHQ-3R0507R-TW	3.0	500	35x85	1.1	1.4	1.50	441.57	33.26	7028	0.6250	5.68
CHQ-3R0607R-TW	3.0	600	35x85	1.1	1.4	1.60	489.60	33.26	6841	0.7500	6.64



## **QUALITY AND RELIABILITY**

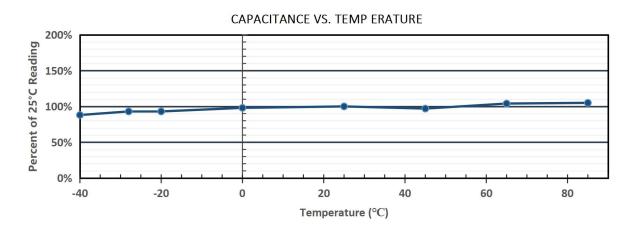

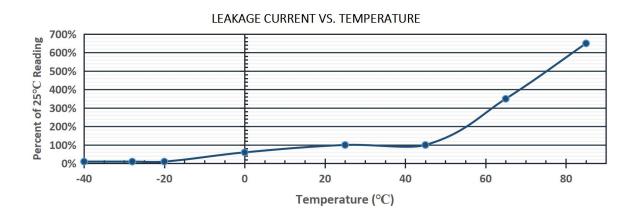

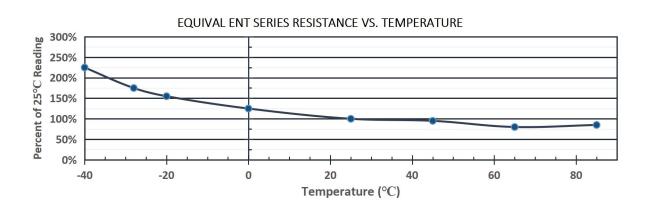



#### LIFE TIME AND TEMPERATURE PERFORMANCE

The life of a Super Capacitor is impacted by a combination of operating voltage and the operating temperature according to the following equation:

### $LS = L_R \times 2_X \times 2_Y$

Which is X= (Tm-Ta)/10 Y= (Vr-Va)/0.2

Ls = Expected life of the super capacitor in the application


LR = Load life rating of the super capacitor

Tm = Max temperature rating of the super capacitor

Ta = Ambient temperature of the application

Vr = Rated voltage of the super capacitor

Va = Maximum applied voltage on the super capacitor in the application

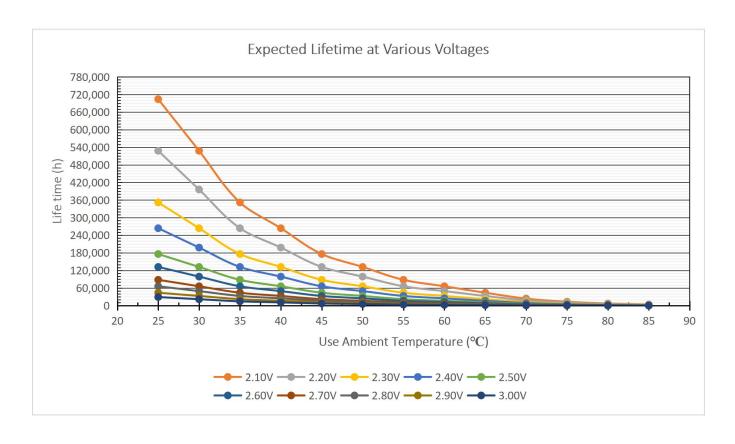





# **New Lower ESR Series**

www.cda-cap.com

#### SAFETY RECOMMENDATIONS

#### WARNINGS

- To Avoid Short Circuit, after usage or test, SuperCapacitors voltage needs to discharge to ≤ 0.1V
- Do not Apply Overvoltage, Reverse Charge, Burn or Heat Higher than 150°C, explosion-proof valve may break open
- Do not Press, Damage or disassemble the SuperCapacitors, housing could heat to high temperature causing Burns
- If you observe Overheating or Burning Smell from the capacitor disconnect Power immediately, and do not touch

#### REGULATORY

- MSDS
- RoHS Compliant
- Reach Compliant

#### **TRANSPORTATION**

Not subjected to US DOT or IATA regulations UN3499, <10Wh, Non-Hazardous Goods International shipping description – "Electronic Products – Capacitor"

#### PRECAUTIONS FOR WELDING

When soldering supercapacitors to a PCB, the temperature & time that the body of the supercapacitor sees during soldering can have a negative effect on performance. We advise following these guidelines:

- Do not immerse the supercapacitors in solder. Only the leads should come in contact with the solder.
- Ensure that the body of the supercapacitor is never in contact with the molten solder, the PCB or other components during soldering.
- Excessive temperatures or excessive temperature cycling during soldering may cause the safety vent to burst or the case to shrink or crack, potentially damaging the PCB or other com-ponents, and significantly reduce the life of the capacitor.

#### HAND SOLDERING

Keep distance between the supercapacitor body and the tip of the soldering iron and the tip should never touch the body of the ca-pacitor. Contact between supercapacitor body and soldering iron will cause extensive damage to the supercapacitor, and change its electrical properties. It is recommended that the soldering iron temperature should be less than 350°C, and contact time should be limited to less than 4 seconds. Too much exposure to terminal heat during soldering can cause heat to transfer to the body of the supercapacitor, potentially damaging the electrical properties of the supercapacitor.

#### **WAVE SOLDERING**

Only use wave soldering on Radial type supercapacitors. The PCB should be preheated only from the bottom and for less than 60 seconds, with temperature at, or below, 100°C on the top side of the board for PCBs equal to or greater than 0.8 mm thick.

Solder Temperature	Suggested Solder	Maximum Solder		
(°C)	Time (s)	Time (s)		
220	7	9		
240	7	9		
250	5	7		
260	3	5		

#### **REFLOW SOLDERING**

Infrared or conveyor over reflow techniques can be used on these supercapacitors. Do not use a traditional reflow oven with-out clear rated reflow temperature for supercapacitors.