


# 80 Amp Schottky Rectifier

## SBR8040 — SBR8050

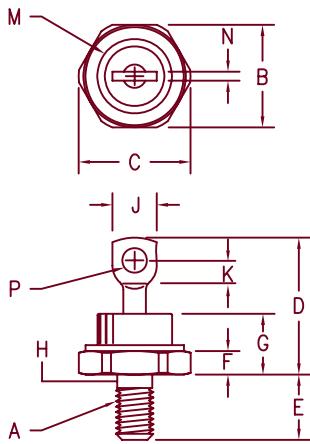

Notes:

1. Full threads within 2 1/2 threads
2. Standard Polarity: Stud is Cathode  
Reverse Polarity: Stud is Anode

	Dim. Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	---	---	---	---	1/4-28
B	.669	.688	17.00	17.47	
C	---	.794	---	20.16	
D	.750	1.00	19.05	25.40	
E	.422	.453	10.72	11.50	
F	.115	.200	2.93	5.08	
G	---	.450	---	11.43	
H	.220	.249	5.59	6.32	1
J	---	.375	---	9.52	
K	.156	---	3.97	---	
L	---	---	---	---	
M	---	.510	---	12.95	Dia
N	---	.080	---	2.03	
O	---	---	---	---	
P	.140	.175	3.56	4.44	Dia

DO-203AB (DO-5)

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SBR8040 *	75HQ035, 85HQ035 75HQ040, 85HQ040 MBR8040	40V	40V	
SBR8045 *	75HQ045, 85HQ045 MBR8045	45V	45V	
SBR8050 *		50V	50V	

\*Add Suffix R For Reverse Polarity

- Schottky Barrier Rectifier
- 175°C Junction Temperature
- Guard Ring Protection
- Reverse Energy Tested
- $V_{RRM}$  – 40 to 50 Volts
- 80 Amperes

### Electrical Characteristics

Average forward current,  
Maximum surge current,  
Max repetitive peak reverse current  
Max peak forward voltage,  
Max peak forward voltage,  
Max peak reverse current  
Max peak reverse current  
Typical junction capacitance

$I_F(AV) = 80$  Amps  
 $I_{FSM} = 1200$  Amps  
 $I_{R(OV)} = 2$  Amps  
 $V_{FM} = 0.58$  Volts  
 $V_{FM} = 0.74$  Volts  
 $I_{RM} = 30$  mA  
 $I_{RM} = 2$  mA  
 $C_J = 2300$  pF

$T_C = 130^\circ\text{C}$ , Square wave,  $R_{\theta JC} = 0.8^\circ\text{C}/W$   
8.3 ms, half sine  $T_J = 175^\circ\text{C}$   
 $f = 1$  KHz, 25°C, 1  $\mu\text{sec}$  Square wave  
 $I_{FM} = 80A$ ,  $T_J = 175^\circ\text{C}^*$   
 $I_{FM} = 80A$ ,  $T_J = 25^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 125^\circ\text{C}^*$   
 $V_{RRM}$ ,  $T_J = 25^\circ\text{C}^*$   
 $V_R = 5.0V$ ,  $T_J = 25^\circ\text{C}$

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range  
Operating junction temp range  
Max thermal resistance  
Typical thermal resistance (greased)  
Mounting torque  
Weight

$T_{STG}$   
 $T_J$   
 $R_{\theta JC}$   
 $R_{\theta CS}$

$-65^\circ\text{C}$  to  $+175^\circ\text{C}$   
 $-65^\circ\text{C}$  to  $+175^\circ\text{C}$   
 $0.8^\circ\text{C}/W$  Junction to sink  
 $0.5^\circ\text{C}/W$  Case to sink  
25–30 inch pounds  
.54 ounce (15.3 grams) typical

**Microsemi**  
LAWRENCE

6 Lake Street  
Lawrence, MA 01841  
PH: (978) 620-2600  
FAX: (978) 689-0803  
[www.microsemi.com](http://www.microsemi.com)

05-30-07 Rev. 3

# SBR8040 — SBR8050

Figure 1  
Typical Forward Characteristics

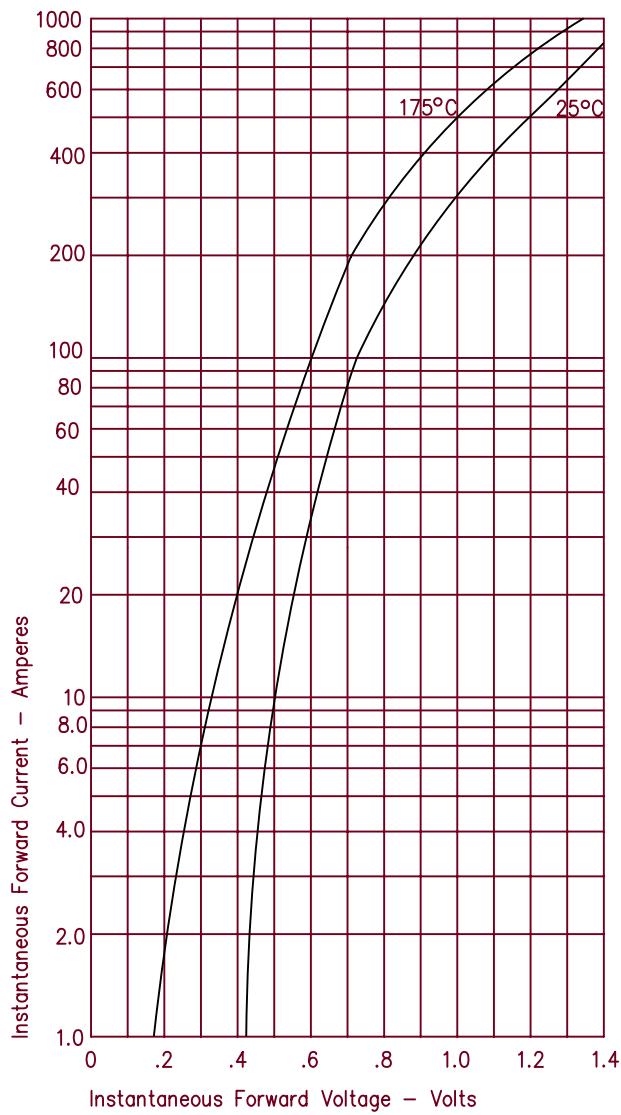


Figure 2  
Typical Reverse Characteristics

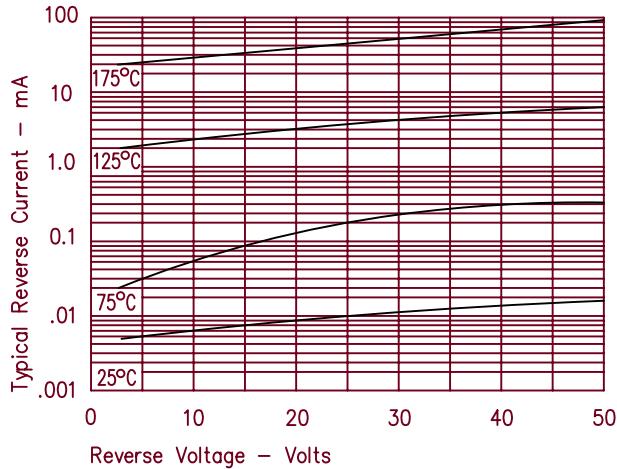


Figure 3  
Typical Junction Capacitance

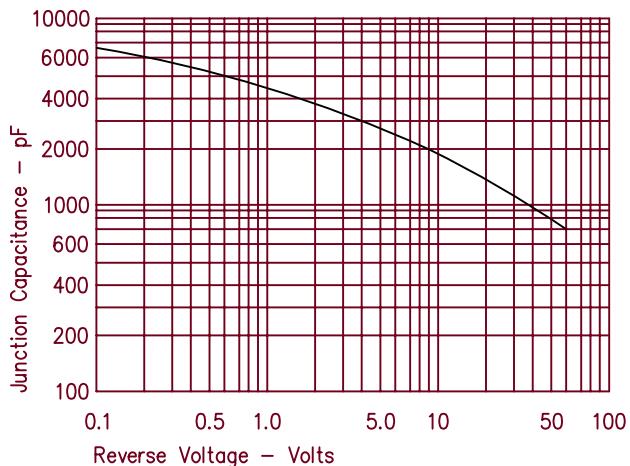


Figure 4  
Forward Current Derating

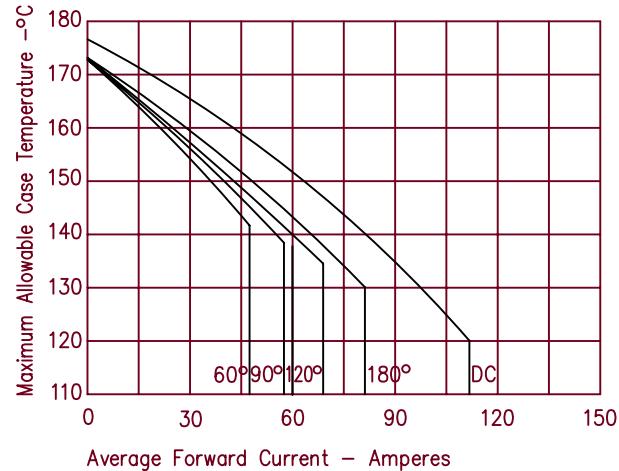


Figure 5  
Maximum Forward Power Dissipation

