

1162502

https://www.phoenixcontact.com/us/products/1162502

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector, rear mounting, Power, 6-position, straight, M12, coding: M, on free cable end, Rear mounting, M16 x 1.5, Individual wires, cable length: 0.5 m, 1.31 mm², UL/cUL stranded hook-up wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1238542

Your advantages

- · For compact devices: transmit high power in a confined space
- Easy-to-install, optimized XL housing contour with wrench size 19
- · Mechanical tightening limitation for long-term-stable gasket
- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1162502	
Packing unit	1 pc	
Minimum order quantity	25 pc	
Sales key	AB27	
Product key	ABQCGG	
GTIN	4063151173005	
Weight per piece (including packing)	22.22 g	
Weight per piece (excluding packing)	22.22 g	
Customs tariff number	85444290	
Country of origin	DE	



1162502

https://www.phoenixcontact.com/us/products/1162502

Technical data

Notes

otes	
General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
General	Lock nut is included in the scope of delivery
Safety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	 WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	 WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	 The products are suitable for applications in plant, controller, and electrical device engineering.
	 When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	 Assembled products may not be manipulated or improperly opened.
	 Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	 When using the product in direct connection with third-party manufacturers, the user is responsible.
	 For operating voltages > 50 V AC, conductive connector housings must be grounded
	 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product
	Only use tools recommended by Phoenix Contact
	Use a protective cap to protect connectors that are not in use.

The suitable accessories are available online in the accessory



1162502

https://www.phoenixcontact.com/us/products/1162502

section of the product at phoenixcontact.com/products
Ensure that the protective or functional ground has been properly connected.
 VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
Rear mounting
Tightening limitation
Individual wires
Circular connectors (device side)
Power
6
1
no
M
M12
III
3
V0
FKM
CuZn
Au
PA
Zinc die-cast, nickel-plated
Bare Cu litz wires
630 V
6 kV
6 kV AC
630 V
8 A
6 kV



1162502

https://www.phoenixcontact.com/us/products/1162502

Connection data

Conductor connection

Connection method	Individual wires	
Contact connection type	Pin	
Conductor cross section	1.31 mm²	
ightening torque	0.8 Nm	
	1.3 Nm	

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100

Connector

Connection 1

Head cable outlet	straight
Head thread type	M12
Coding	M

Connection 2

neau desidii	free cable end
--------------	----------------

Cable/line

Cable length	0.5 m	
Cable type	UL/cUL stranded hook-up wire	
Signal type/category	Power	
Wire diameter incl. insulation	2.2 mm	
Single wire, color	black 1, black 2, black 3, black 4, black 5, green/yellow	
Conductor material	Bare Cu litz wires	
AWG signal line	16 mPPE	
Material wire insulation		
Halogen-free	yes	
Flame resistance	in acc. to UL 1581 VW1	
Ambient temperature (operation)	-40 °C 105 °C (cable, fixed installation)	
	-20 °C 105 °C (Cable, flexible installation)	

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
	IP65/IP67
Ambient temperature (operation)	-25 °C 85 °C (Plug / socket)
	-20 °C 105 °C (Cable, flexible installation)



1162502

https://www.phoenixcontact.com/us/products/1162502

	-40 °C 105 °C (cable, fixed installation)		
Standards and regulations			
Flame resistance	in acc. to UL 1581 VW1		
M12			
Standard designation	M12 connector		
Standards/specifications	IEC 61076-2-111		
Note	In line with		




1162502

https://www.phoenixcontact.com/us/products/1162502


Drawings

Schematic diagram

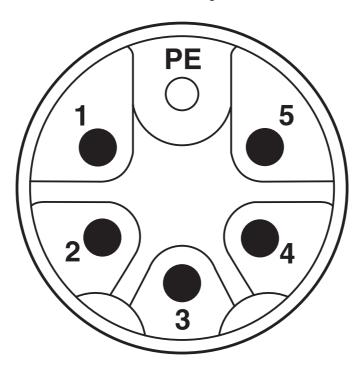

Pin assignment of M12 connector, 6-pos., M-coded, pin side view

Dimensional drawing

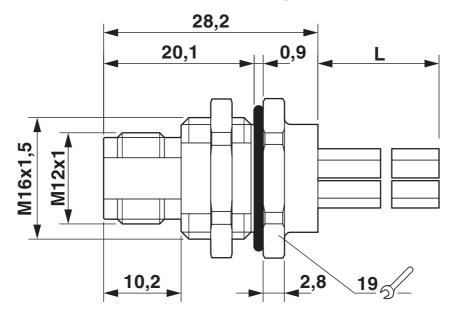

M12 flush-type plug



1162502

https://www.phoenixcontact.com/us/products/1162502

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1162502



CULus Recognized Approval ID: E468743-20180113					
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	10 A	- 16	-



1162502

https://www.phoenixcontact.com/us/products/1162502

Classifications

ECLASS

	ECLASS-11.0	27440102		
	ECLASS-12.0	27440116		
	ECLASS-13.0	27440116		
ETIM				
	ETIM 8.0	EC002635		
UNSPSC				
	UNSPSC 21.0	39121400		



1162502

https://www.phoenixcontact.com/us/products/1162502

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"



1162502

https://www.phoenixcontact.com/us/products/1162502

Accessories

PROT-M12 FS - Sealing cap

1560251

https://www.phoenixcontact.com/us/products/1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

PROT-M12 FS-M - Sealing cap

1430488

https://www.phoenixcontact.com/us/products/1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com