



SEAWARD
ELECTRONICS

SE86XX

80V/2uA,Ultra Low High PSRR Quiescent Current LDO

Modify Record:

版次	新版本	旧版本	修改单位	修改内容
2019-06-01	1.0	NA	研发部	新文件制成（因工程产品，故 RD 开头）



General Description (产品描述)

The SE86XX series is a high voltage, ultralow-power regulator. The device can allow an input voltage as high as 60V. The typical quiescent current is only 2 μ A. The device is available in fixed output voltages of 3.3V and 5.0V.

The device features integrated short-circuit and thermal shutdown protection.

Although designed primarily as fixed voltage regulators, the device can be used with external components to obtain variable voltages.

Features(产品特性)

- Low Quiescent Current: 2 μ A
- High Input Voltage: Up to 80V
- High Output Current: 200mA
- Dropout Voltage: 70mV@10mA

700mV@100mA

- Fixed Output Voltages: 3.3V and 5.0V
- High-accuracy Output Voltage
- With EN pin
- Good Transient Response
- Integrated Short-Circuit Protection
- Integrated Thermal Protection
- Available Packages: SOT23-3, SOT89, SOT23-5

Applications(产品应用)

- Battery-powered equipment
- Smoke detector and sensor
- Microcontroller Applications
- Smart electric meter




SEAWARD
ELECTRONICS


SE86XX

80V/2uA,Ultra Low High PSRR Quiescent Current LDO

Typical Application (典型应用电路)

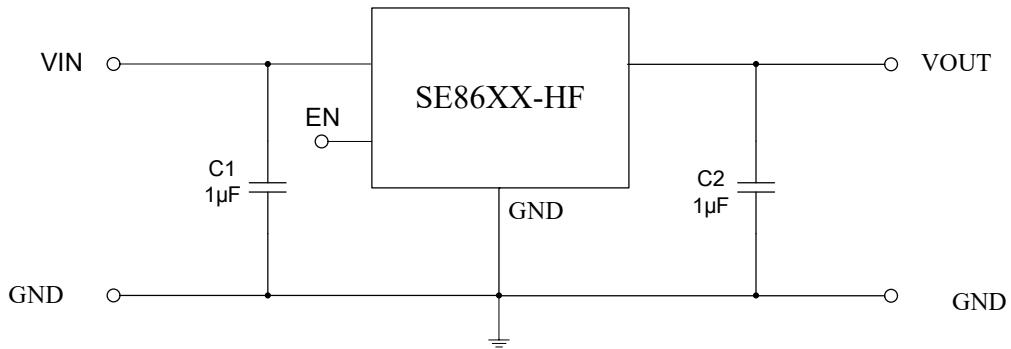

Pin Configuration (管脚排列)

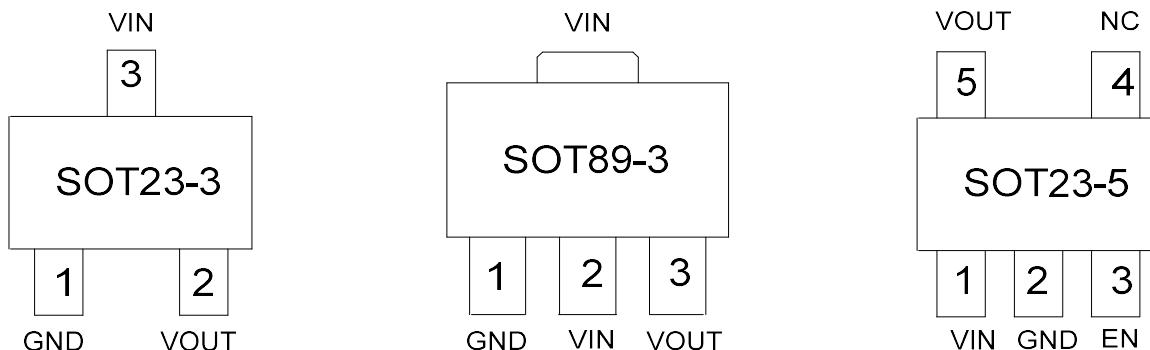


Pin Description (管脚功能描述)


Pin Name	Pin Function Description
VIN	In put pin
VOUT	Out put pin
GND	Ground pin
EN	Enable pin
NC	No connection



Functional Block Diagram (功能框图)

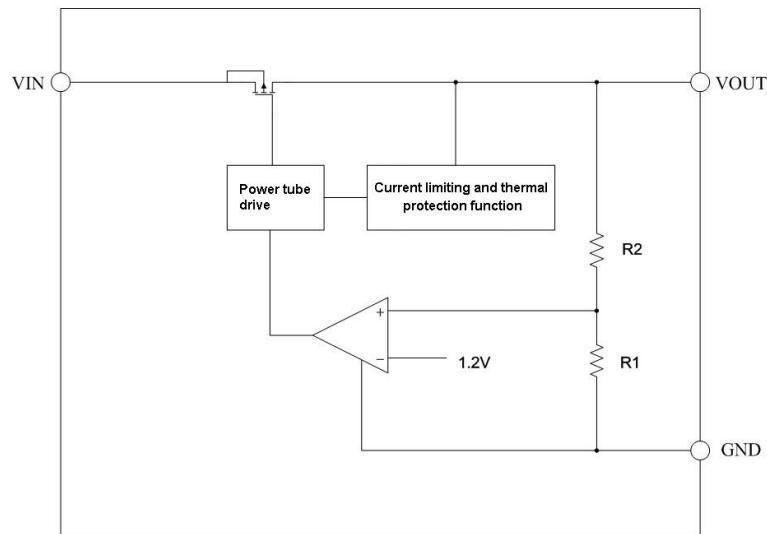

Ordering Information (订货信息)

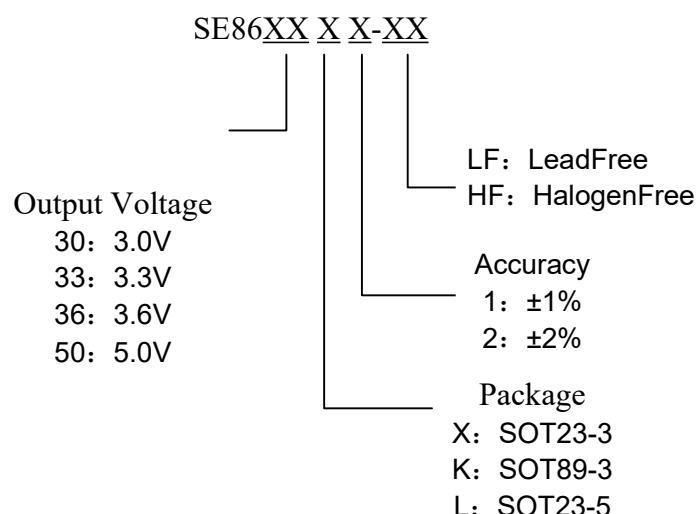



Absolute Maximum Ratings(最大额定参数)

Symbol	Parameter	Value	Units
V_{IN}	Input Supply Voltage	80	V
$V_{OUT-GND}$	Output Voltage TO GND	6	
$V_{out-VIN}$	Output Voltage TO VIN	-35	
T_A	Operating Temperature	-40---105	°C
T_{STG}	Storage Temperature	-40---150	
T_J	Maximum Junction Temperature	150	
T_{LEAD}	Lead Temperature (Soldering) 10 seconds	260	
θ_{JA}	Thermal Resistance, Junction-to-Ambient	165(SOT89)	°C/W
		280(SOT23-3)	
		270(SOT23-5)	
P_D	Power Consumption	750(SOT89)	mW
		446(SOT23-3)	
		465(SOT23-5)	

Note : Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Recommended Operating Conditions(推荐工作条件)

Symbol	Parameter	Maximum	Units
V_{IN}	Input Supply Voltage	60	V
T_A	Operating Temperature	-20---85	°C
T_{LEAD}	Lead Temperature (Soldering) 10 seconds	230	°C



Electrical Characteristics(电气参数)

(TA=25° C, CIN=1uF, VIN=VOUT+1.0V, COUT=10μF, unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{IN}	Input Supply Voltage		2.8		60	V
V _{OUT}	Output Voltage Accuracy	I _{OUT} =10mA	-1%		1%	V
			-2%		2%	V
I _Q	Quiescent Current	V _{IN} =6V~60V		1.8	4	μA
I _{OUT}	Output Current			200		mA
V _{DROP}	Dropout Voltage	I _{OUT} =10mA ΔV _{OUT} = - V _{OUT} *2%		70		mV
		I _{OUT} =100mA ΔV _{OUT} = - V _{OUT} *2%		700		mV
V _{LR}	Load Regulation	1mA ≤ I _{OUT} ≤ 100mA		20		mV
V _{SR}	Line Regulation	I _{OUT} =1mA, V _{IN} =(V _{OUT} +1V) to 30V		0.2		%/V
I _{LIMIT}	Current Limit	V _{IN} =(V _{OUT} +1V) to 60V		400		mA
T _{SHDN}	Thermal Protection			125		°C
T _{CVOUT}	Output Voltage Temperature Coefficient	I _{OUT} =10mA -40°C ≤ T _{AMB} ≤ 100°C		-17		ppm/°C




SEAWARD
ELECTRONICS

SE86XX


80V/2uA,Ultra Low High PSRR Quiescent Current LDO

Typical Performance Characteristics(典型性能特性)



(TA=25° C, CIN=1uF, VIN=VOUT (3.3V) +1.0V, COUT=10uF, unless otherwise noted)

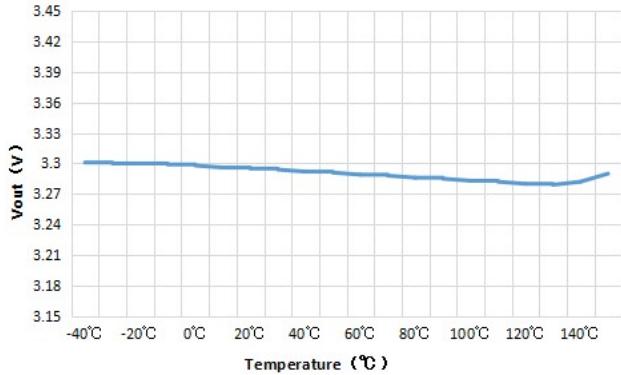


Output Voltage Temperature Coefficient

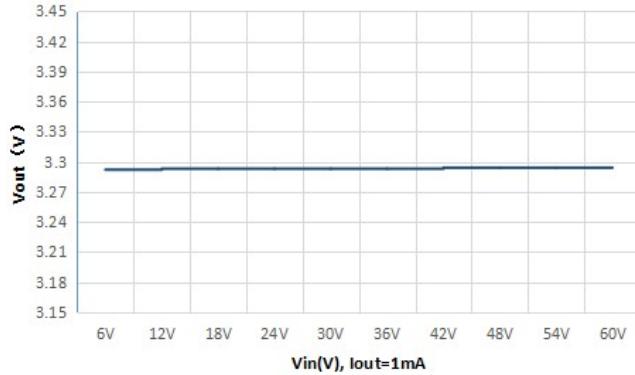

Line Regulation

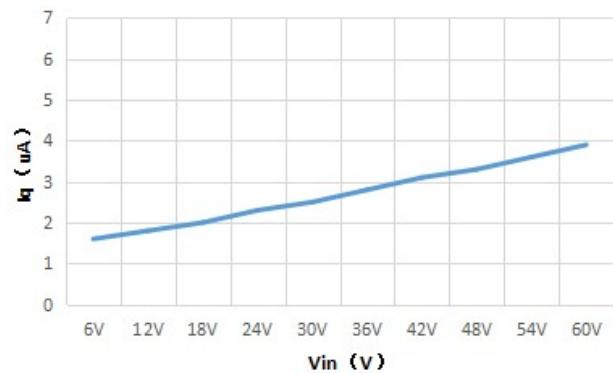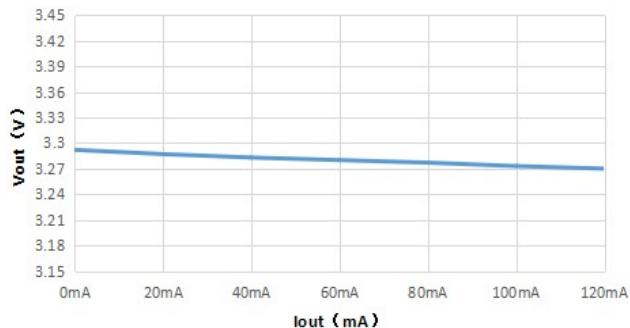


Load Regulation(Vin=12V)

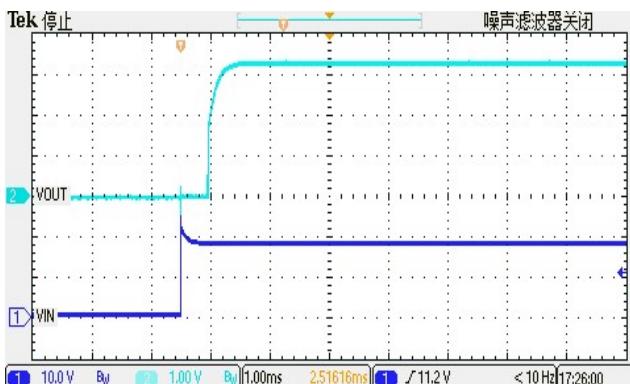

VIN=24V, No Load, COUT=10uF

Quiescent Current(Iout=0mA,EN=VIN)

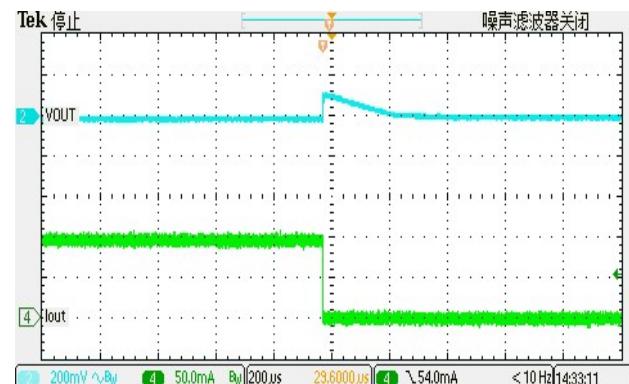


VIN=12.0V, COUT=10uF, Iout=100mA to 10mA




SEAWARD
ELECTRONICS

SE86XX


80V/2uA,Ultra Low High PSRR Quiescent Current LDO

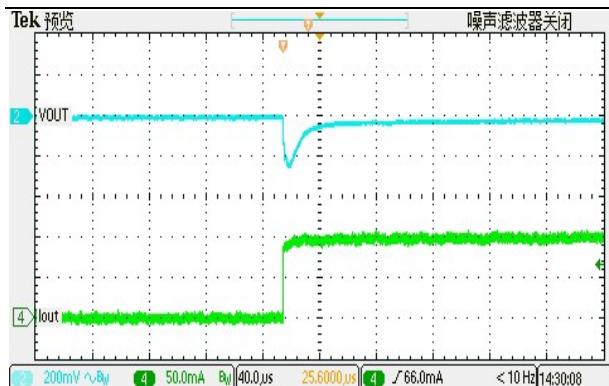


Load Transient

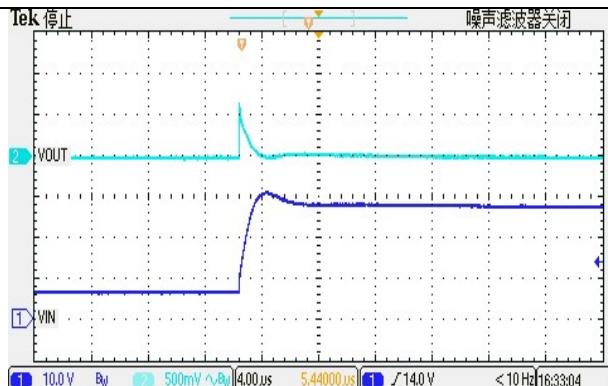


Line Transient

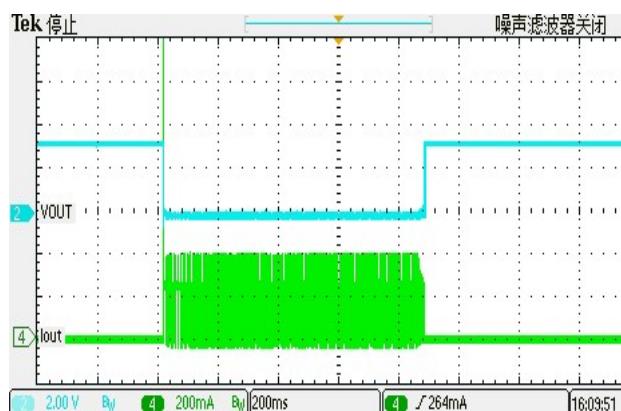

V_{IN}=25.0V , Short Protection Occurred

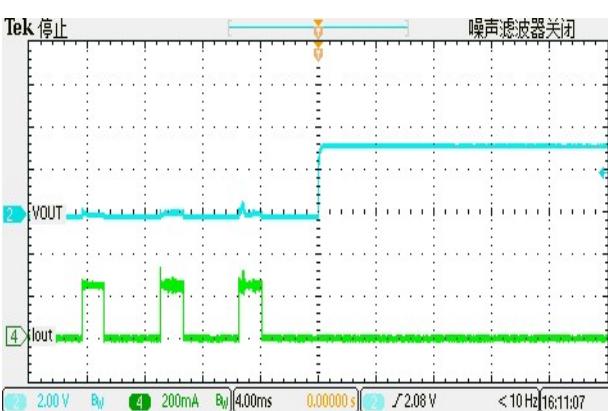

V_{IN}=25.0V , Short Protection Removed

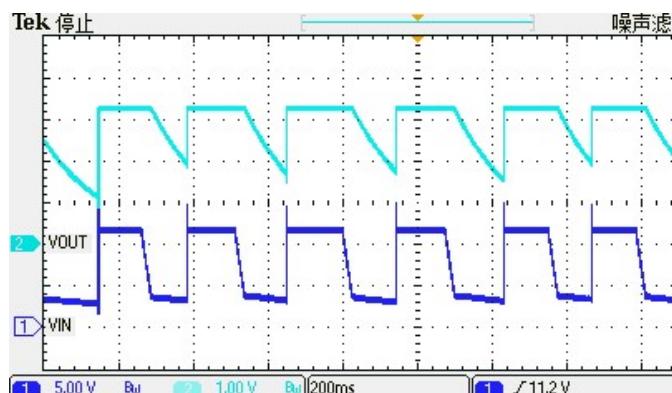

V_{IN}=12.0V , Fast open Vin




SEAWARD
ELECTRONICS

SE86XX

80V/2uA,Ultra Low High PSRR Quiescent Current LDO

Outline Drawing for SOT-23-3

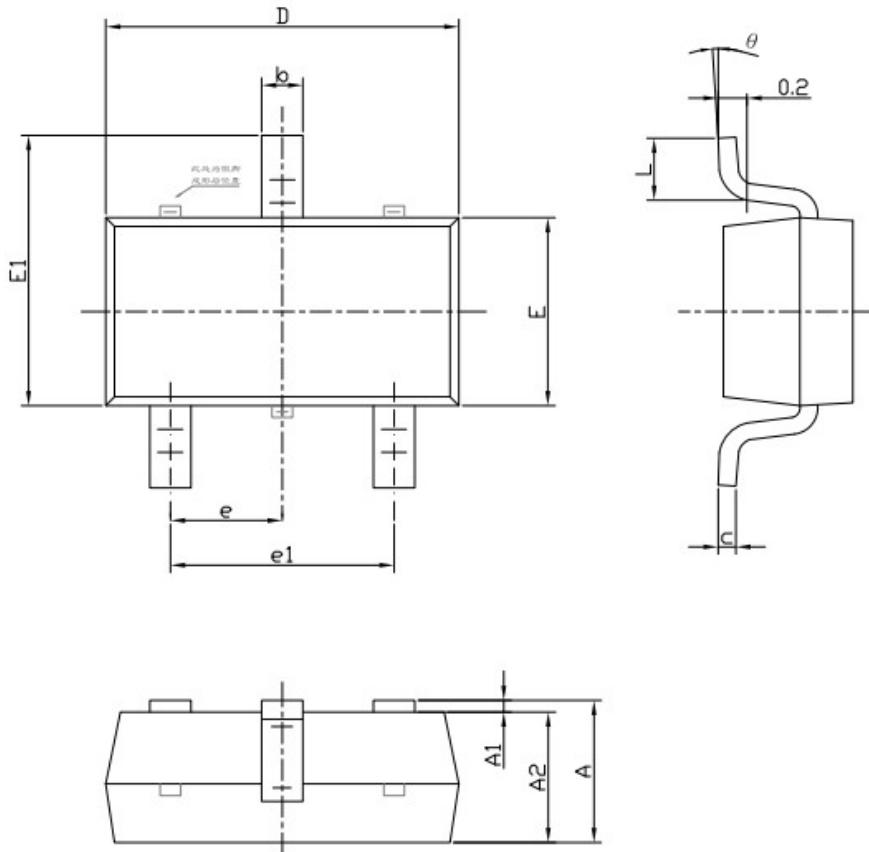

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°




SEAWARD
ELECTRONICS

SE86XX


80V/2uA,Ultra Low High PSRR Quiescent Current LDO

Outline Drawing for SOT-89

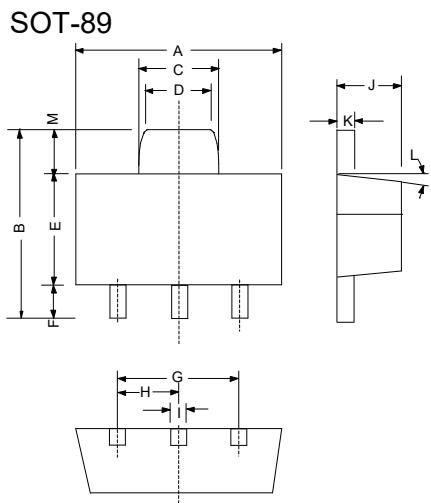

DIM ^N	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.173	0.181	4.400	4.600
B	0.159	0.167	4.050	4.250
C	0.067	0.075	1.700	1.900
D	0.051	0.059	1.300	1.500
E	0.094	0.102	2.400	2.600
F	0.035	0.047	0.890	1.200
G	0.118REF		3.00REF	
H	0.059REF		1.50REF	
I	0.016	0.020	0.400	0.520
J	0.055	0.063	1.400	1.600
K	0.014	0.016	0.350	0.410
L	10°TYP		10°TYP	
M	0.028REF		0.70REF	

Outline Drawing for SOT-23-5

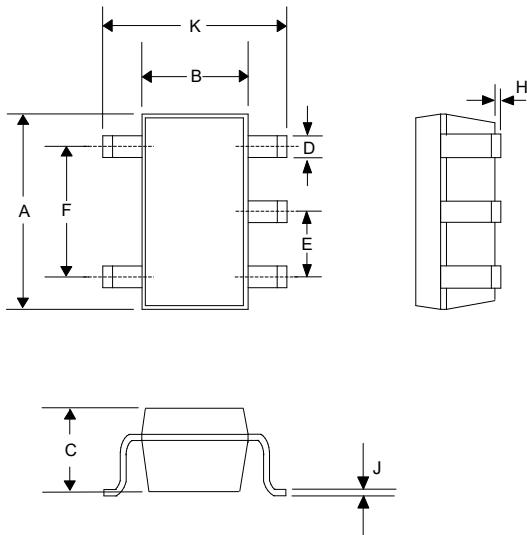

DIM ^N	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.110	0.120	2.80	3.05
B	0.059	0.070	1.50	1.75
C	0.036	0.051	0.90	1.30
D	0.014	0.020	0.35	0.50
E	-	0.037	-	0.95
F	-	0.075	-	1.90
H	-	0.006	-	0.15
J	0.0035	0.008	0.090	0.20
K	0.102	0.118	2.60	3.00

联系方式:

北京思旺电子技术有限公司—中国总部

地址: 中国北京市海淀区信息路 22 号上地科技综合楼 B 座二层

邮编: 100085

电话:010-82895700/1/5

传真:010-82895706

Seaward Electronics Corporation – 台湾办事处

2F, #181, Sec. 3, Minquan East Rd,

Taipei, Taiwan R.O.C

电话: 886-2-2712-0307

传真: 886-2-2712-0191

Seaward Electronics Incorporated – 北美办事处

1512 Centre Pointe Dr.

Milpitas, CA95035, USA

电话: 1-408-821-6600