

■ SWITCHING CHARACTERISTICS(V_{CC}=5V,T_a=25°C)

Item	Symbol	Inputs	Test Conditions	min	typ	max	Unit
Propagation delay time	<i>t_{PLH}</i>	A or B	$C_L = 15\text{pF}$ $R_L = 2\text{k}\Omega$	-	12	23	ns
	<i>t_{PHL}</i>			-	10	17	ns
	<i>t_{PLH}</i>	A or B	Other inputs=4.5V	-	20	30	ns
	<i>t_{PHL}</i>			-	13	22	ns

Note) Refer to Test Circuit and Waveform of the Common Item

■ ELECTRICAL CHARACTERISTICS(T_a=-20~+75°C)

Item	Symbol	Test Conditions	min	typ*	max	Unit
Input voltage	<i>V_{IH}</i>		2.0	-	-	V
	<i>V_{IL}</i>		-	-	0.8	V
Output voltage	<i>V_{OH}</i>	$V_{CC} = 4.75V, V_{IH} = 2V, V_{IL} = 0.8V, I_{OH} = -400\mu A$	2.7	-	-	V
	<i>V_{OL}</i>	$V_{OL} = 4.75V, V_{IH} = 2V, V_{IL} = 0.8V$	$I_{OL} = 4\text{mA}$ $I_{OL} = 8\text{mA}$	-	-	0.4
Input current	<i>I_I</i>	$V_{CC} = 5.25V, V_I = 7V$	-	-	0.2	mA
	<i>I_{IIH}</i>	$V_{CC} = 5.25V, V_I = 2.7V$	-	-	40	μA
	<i>I_{IL}</i>	$V_{CC} = 5.25V, V_I = 0.4V$	-	-	-0.8	mA
Short-circuit output current	<i>I_{OS}</i>	$V_{CC} = 5.25V, V$	-20	-	-100	mA
Supply current **	<i>I_{CC}</i>	$V_{CC} = 5.25V, V$	-	6.1	10	mA
Input clamp voltage	<i>V_{IH}</i>	$V_{CC} = 4.75V, I_{IN} = -18\text{mA}$	-	-	-1.5	V

* $V_{CC}=5V, T_a=25^{\circ}C$


** I_{CC} is measured with all outputs open and all inputs grounded.

■ FUNCTION TABLE


Inputs		Output
A	B	Y
L	L	L
L	H	H
H	L	H
H	H	L

H;high level,L;low level

■ PIN ARRANGEMENT

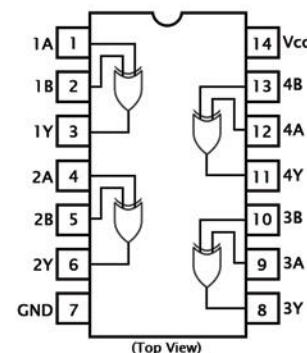

XD74LS86 DIP14

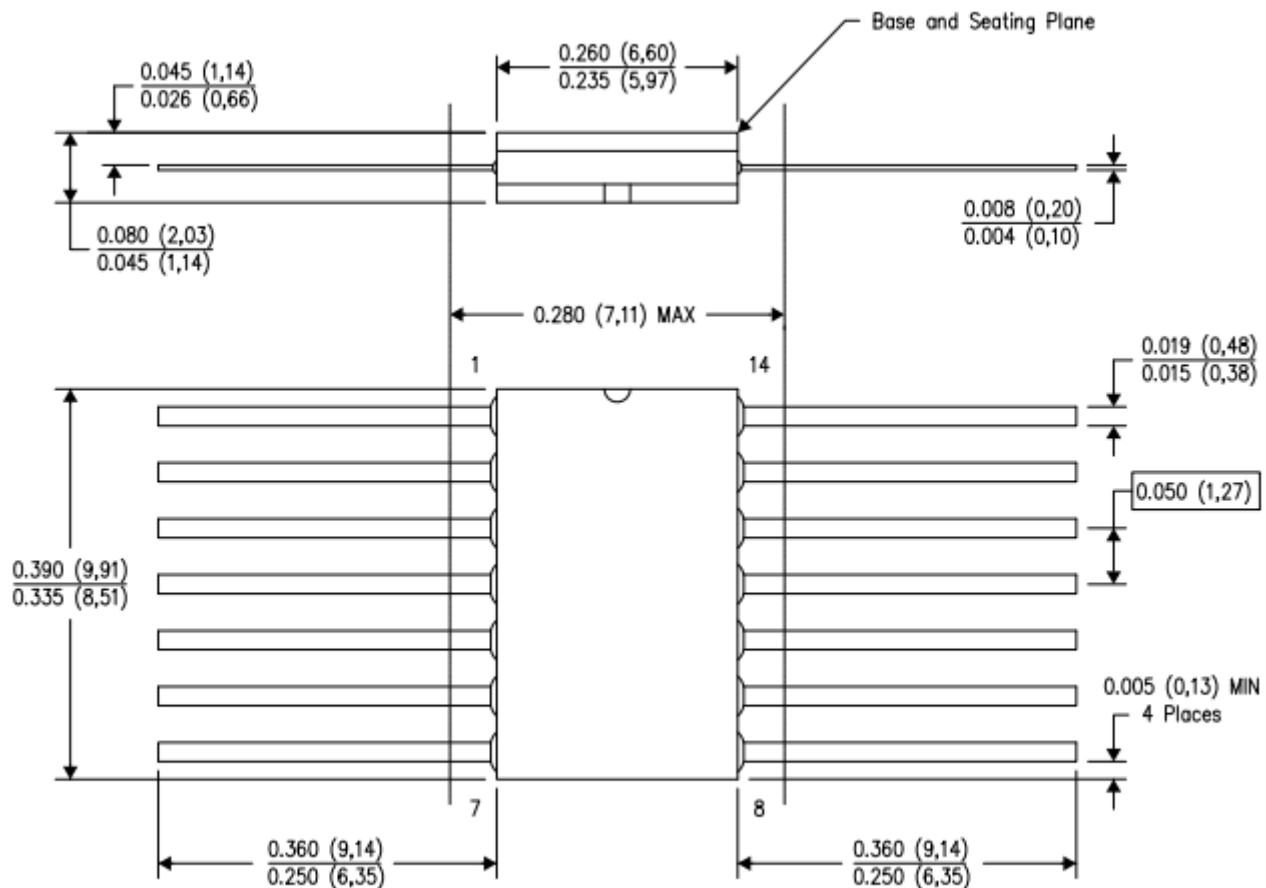

以上信息仅供参考. 如需帮助联系客服人员。谢谢 XINLUDA