

TNC Male Right Angle to TNC Male Right Angle Cable
Assembly using LC085TB Coax, 5 FT



LCCA30125-FT5

Configuration

- Connector 1: TNC Male Right Angle
- Connector 2: TNC Male Right Angle
- Cable Type: LC085TB

Features

- Max Frequency 6 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.5% VoP
- Hand Formable
- Tin Filled Copper Composite Braid Outer Conductor

Applications

- General Purpose
- Laboratory Use
- System Interconnect



Description

L-com's LCCA30125-FT5 is a TNC male right angle to TNC male right angle cable assembly using LC085TB coax, 5 FT and ships same-day. The LC085TB coax of this TNC cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com TNC to TNC cable assembly has a male to male gender configuration with formable LC085TB series coax and operates to 6 GHz. The tinned copper composite braid outer conductor is easily formed by hand with an overall diameter of 0.085 inches and excellent shielding effectiveness greater than 100dB. This right angle TNC cable interface on the LC085TB coax allows for easier connections in tight spaces.

Custom versions of this TNC male to TNC male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30125-FT5 L-com TNC Male Right Angle to TNC Male Right Angle Cable Assembly using LC085TB Coax, 5 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

TNC Male Right Angle to TNC Male Right Angle Cable
Assembly using LC085TB Coax, 5 FT



LCCA30125-FT5

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ohms/1000ft [Ohms/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	6	GHz
Insertion Loss (Max.)	0.97	1.15	1.53	2.14	3.41	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.2 dB per right angle connector.

Mechanical Specifications

Cable Assembly

Length	60 in [152.4 cm]
Diameter	0.013 in [0.33 mm]

Cable

Cable Type	LC085TB
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	0
Outer Conductor Material and Plating	Tinned Copper Composite Braid
Outer Conductor Diameter	0.085 in [2.16 mm]

Repeated Minimum Bend Radius	0.78 in [19.81 mm]
------------------------------	--------------------

TNC Male Right Angle to TNC Male Right Angle Cable
Assembly using LC085TB Coax, 5 FT



LCCA30125-FT5

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Right Angle	TNC Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.


TNC Male Right Angle to TNC Male Right Angle Cable
Assembly using LC085TB Coax, 5 FT



LCCA30125-FT5

How to Order

Part Number Configuration:

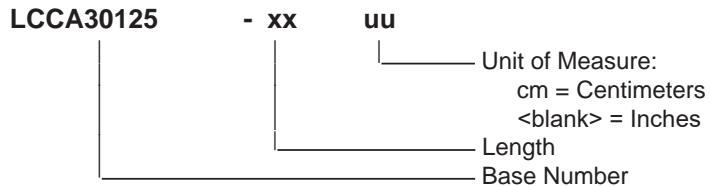

Example: LCCA30125-12 = 12 inches long cable
LCCA30125-100cm = 100 cm long cable


TNC Male Right Angle to TNC Male Right Angle Cable Assembly using LC085TB Coax, 5 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

TNC Male Right Angle to TNC Male Right Angle Cable Assembly using LC085TB Coax, 5 FT

L-com CAD Drawing

REV.		DESCRIPTION		DATE	APPROVED								
A	INITIAL RELEASE	01/31/2020	SELLIS										
REVISIONS													
<table border="1"> <tr> <td>REV.</td> <td>DESCRIPTION</td> <td>DATE</td> <td>APPROVED</td> </tr> <tr> <td>A</td> <td>INITIAL RELEASE</td> <td>01/31/2020</td> <td>SELLIS</td> </tr> </table>						REV.	DESCRIPTION	DATE	APPROVED	A	INITIAL RELEASE	01/31/2020	SELLIS
REV.	DESCRIPTION	DATE	APPROVED										
A	INITIAL RELEASE	01/31/2020	SELLIS										

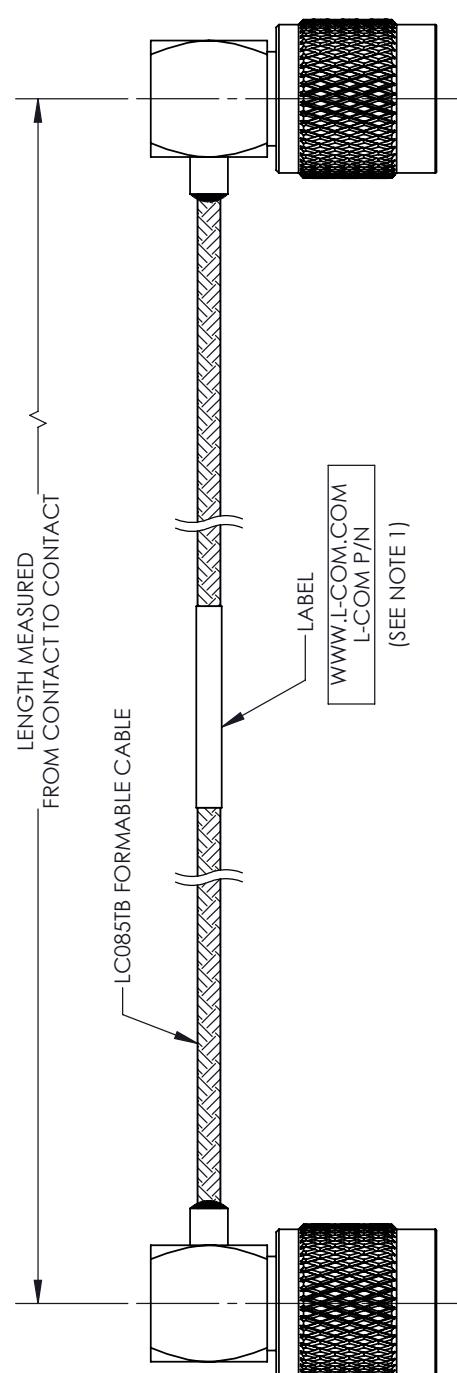

LENTH MEASURED
FROM CONTACT TO CONTACT

LC085TB FORMABLE CABLE

LABEL

WWW.L-COM.COM
L-COM P/N
(SEE NOTE 1)

TNC MALE RIGHT ANGLE

TNC MALE RIGHT ANGLE

L-COM
an **INFINITE** brand

50 High Street, West Mill, 3rd Floor, Suite #30
North Andover, MA 01845 USA
Phone: 1.800.341.5266 | 1.978.682.6936
Fax: 1.978.689.9484
Website: www.L-com.com
E-mail: CustomerService@L-com.com

THIRD ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
L-COM GLOBAL INC.
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A

NOTES:

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END,
6.0" FROM THE FRONT OF THE CONNECTOR.

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

T-Rev.D