

MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

LMV331-MS\LMV393-MS\LMV339-MS

Product specification

GENERAL DESCRIPTION

The LMV331-MS and LMV393-MS is the single and dual comparator version, the LMV339-MS is quad comparator version, and both are open-drain output comparators for maximum flexibility. It can operate from 2.1V to 5.5V, and have low power consuming 50µA (TYP) per channel at output low.

The LMV331-MS, LMV393-MS and LMV339-MS are the most cost-effective solutions for applications where low voltage operation, low power and space saving are the primary specifications in circuit design for portable consumer products.

The LMV331-MS, LMV393-MS and LMV339-MS are available in Green SOT-23-5, SOP-8, SOP-14 packages. It operates over an ambient temperature range of -40°C to +85°C.





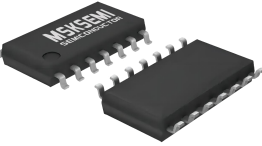
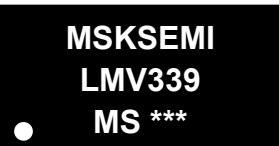
FEATURES

- Supply Range: +2.1V to +5.5V
- Low Supply Current
- 50µA (TYP) per channel at VS = 5V and output low
- Input Common-Mode Voltage Range Includes Ground
- Low Output Saturation Voltage 100mV Typical
- Open-Drain Output for Maximum Flexibility
- SPECIFIED UP TO +125°C
- Micro SIZE PACKAGES: SOT23-5

APPLICATIONS

- Hysteresis Comparators
- Oscillators
- Window Comparators
- Industrial Equipment
- Test and Measurement

Reference News

| PACKAGE OUTLINE | Marking |
|--|---|
|  LMV331-MS |  |
|  LMV393-MS |  |
|  LMV339-MS |  |

SIMPLIFIED SCHEMATIC

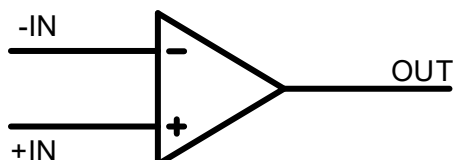


Figure 1. Simplified Schematic

Absolute Maximum Ratings(1)

| | | MIN | MAX | UNIT |
|-------------|--|------------|------------|------|
| Voltage | Supply, $V_s=(V+) - (V-)$ | | 7 | V |
| | Input pin (IN+, IN-) ⁽²⁾ | (V-) - 0.3 | (V+) + 0.3 | V |
| | Signal output pin ⁽³⁾ | (V-) - 0.3 | (V+) + 0.3 | V |
| Current | Signal Input pin (IN+, IN-) ⁽²⁾ | -10 | 10 | mA |
| | Signal output pin ⁽³⁾ | -55 | 55 | mA |
| Temperature | Operating Range | -40 | 85 | °C |
| | Storage | -65 | 150 | °C |
| | Junction | | 150 | °C |

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) Output terminals are diode-clamped to the power-supply rails. Output signals that can swing more than 0.5V beyond the supply rails should be current-limited to $\pm 55\text{mA}$ or less.

(3) Short-circuit from output to VCC can cause excessive heating and eventual destruction.

ESD Ratings

| | | | VALUE | UNIT |
|-------------|-------------------------|--|------------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾ | ± 2000 | V |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾ | ± 1000 | V |

(1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.


Recommended Operating Conditions

| | | MIN | MAX | UNIT |
|-------------------------------------|---------------|-----------|------------|------|
| Supply voltage, $V_s = (V+) - (V-)$ | Single-supply | 2.1 | 5.5 | V |
| | Dual-supply | ± 0.9 | ± 2.75 | V |

PACKAGE/ORDER INFORMATION

| MODEL | OPERATING TEMPERATURE RANGE | PACKAE DESCRIPTION | QTY |
|-----------|-----------------------------|--------------------|------|
| LMV331-MS | -40°C~85°C | SOT23-5 | 3000 |
| LMV393-MS | -40°C~85°C | SOP-8 | 2500 |
| LMV339-MS | -40°C~85°C | SOP-14 | 2500 |


Pin Configuration and Functions (Top View)

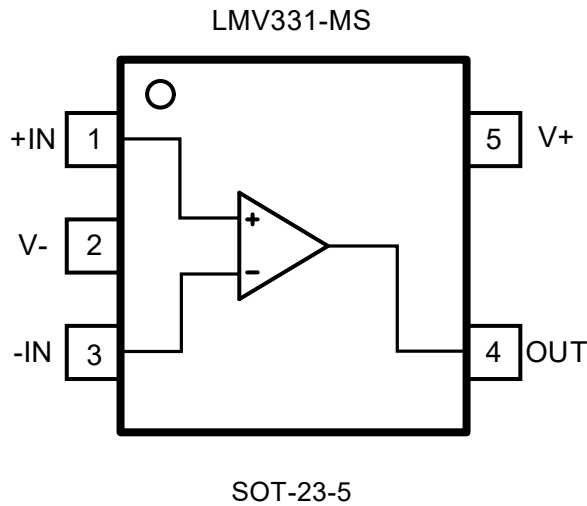

Pin Description

| Pin Name | Pin Number | I/O | Description |
|----------|------------|-----|---------------------------------|
| | SOT23-5 | | |
| +IN | 1 | I | Noninverting input |
| V- | 2 | - | Negative(lowest) power supply |
| -IN | 3 | I | Inverting input |
| OUT | 4 | O | Output |
| V+ | 5 | - | Positive (highest) power supply |


Pin Configuration and Functions (Top View)

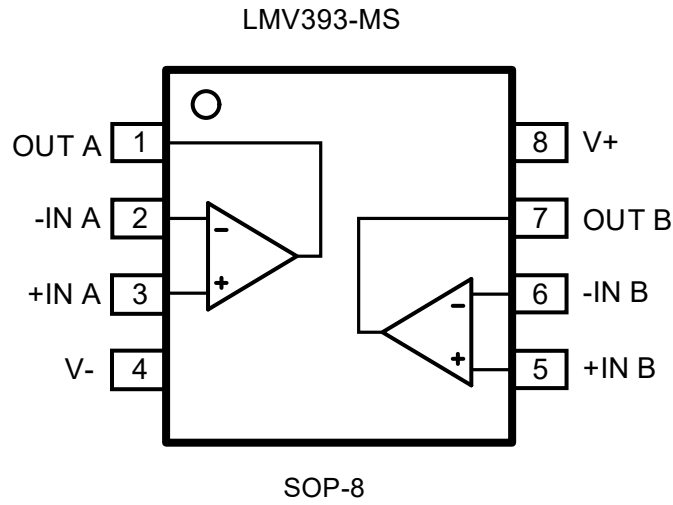

Pin Description

| Pin Name | Pin Number | I/O | Description |
|----------|------------|-----|---------------------------------|
| | SOP-8 | | |
| OUTA | 1 | O | Output, channel A |
| -INA | 2 | I | Inverting input, channel A |
| +INA | 3 | I | Noninverting input, channel A |
| V- | 4 | - | Negative(lowest) power supply |
| +INB | 5 | I | Noninverting input, channel B |
| -INB | 6 | I | Inverting input, channel B |
| OUTB | 7 | O | Output, channel B |
| V+ | 8 | - | Positive (highest) power supply |

Pin Configuration and Functions (Top View)

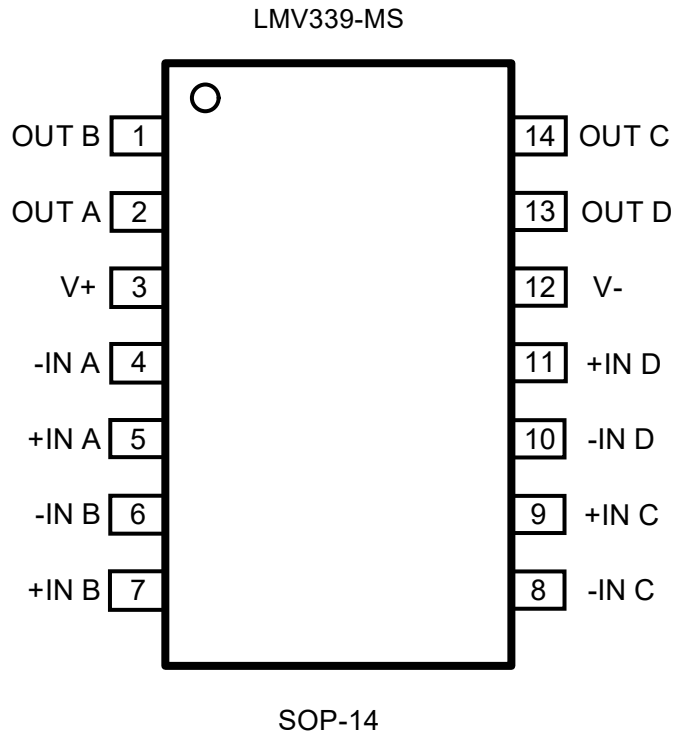

Pin Description

| Pin Name | Pin Number | I/O | Description |
|----------|------------|-----|---------------------------------|
| | SOP-14 | | |
| OUTB | 1 | O | Output, channel B |
| OUTA | 2 | O | Output, channel A |
| V+ | 3 | - | Positive (highest) power supply |
| -INA | 4 | I | Inverting input, channel A |
| +INA | 5 | I | Noninverting input, channel A |
| -INB | 6 | I | Inverting input, channel B |
| +INB | 7 | I | Noninverting input, channel B |
| -INC | 8 | I | Inverting input, channel C |
| +INC | 9 | I | Noninverting input, channel C |
| -IND | 10 | I | Inverting input, channel D |
| +IND | 11 | I | Noninverting input, channel D |
| V- | 12 | - | Negative(lowest) power supply |
| OUTD | 13 | O | Output, channel D |
| OUTC | 14 | O | Output, channel C |

ELECTRICAL CHARACTERISTICS(V_S = 5.0V)

 At T_A = 25°C, V_{CM} = V_S/2, unless otherwise noted.

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|-----------------------|------|-----|-------|
| POWER SUPPLY | | | | | |
| Operating Voltage Range | | 2.1 | | 5.5 | V |
| Quiescent Current/per channel (Output High) | | | 29 | | μA |
| Quiescent Current/per channel (Output Low) | | | 50 | | μA |
| Power Supply Rejection Ratio | V _S = 2.1V to 5.5V, V _{CM} = V _S /2 | | 70 | | dB |
| INPUT | | | | | |
| Input offset voltage | | -4 | ±0.8 | 4 | mV |
| Input Offset Voltage Drift | | | 0.8 | | μV/°C |
| Common-Mode Voltage Range | | (V _S)-0.1 | | 4.5 | V |
| Common-mode Rejection Ratio | V _{CM} = -0.1V to 4.5V | | 70 | | dB |
| Input Bias Current | | | 2 | | pA |
| Input Offset Current | | | 1 | | pA |
| OUTPUT | | | | | |
| Saturation Voltage | I _O ≤ 4mA | | 100 | | mV |
| Output Pull-up Voltage Range | | | | 5.6 | V |
| Output Current(sinking) | V _O ≤ 1.5V | | 50 | | mA |
| SWITCHING | | | | | |
| Propagation Delay H To L | R _{PU} = 5.1KΩ, Overdrive = 10mV | | 460 | | ns |
| | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 400 | | |
| Propagation Delay L To H | R _{PU} = 5.1KΩ, Overdrive = 10mV | | 950 | | |
| | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 850 | | |
| Fall Time | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 36 | | ns |

ELECTRICAL CHARACTERISTICS(V_S = 2.7V)

 At T_A = 25°C, V_{CM} = V_S/2, unless otherwise noted.

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|-----------------------|------|-----|-------|
| POWER SUPPLY | | | | | |
| Operating Voltage Range | | 2.1 | | 5.5 | V |
| Quiescent Current/per channel (Output High) | | | 17 | | μA |
| Quiescent Current/per channel (Output Low) | | | 30 | | μA |
| Power Supply Rejection Ratio | V _S = 2.1V to 5.5V, V _{CM} = V _S /2 | | 70 | | dB |
| INPUT | | | | | |
| Input offset voltage | | -4 | ±0.8 | 4 | mV |
| Input Offset Voltage Drift | | | 0.8 | | μV/°C |
| Common-Mode Voltage Range | | (V _S)-0.1 | | 2.2 | V |
| Common-mode Rejection Ratio | V _{CM} = -0.1V to 2.2V | | 70 | | dB |
| Input Bias Current | | | 2 | | pA |
| Input Offset Current | | | 1 | | pA |
| OUTPUT | | | | | |
| Saturation Voltage | I _O ≤ 4mA | | 82 | | mV |
| Output Pull-up Voltage Range | | | | 5.6 | V |
| Output Current(sinking) | V _O ≤ 1.5V | | 20 | | mA |
| SWITCHING | | | | | |
| Propagation Delay H To L | R _{PU} = 5.1KΩ, Overdrive = 10mV | | 420 | | ns |
| | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 380 | | |
| Propagation Delay L To H | R _{PU} = 5.1KΩ, Overdrive = 10mV | | 900 | | |
| | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 880 | | |
| Fall Time | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 36 | | ns |

ELECTRICAL CHARACTERISTICS(V_S = 2.1V)

 At T_A = 25°C, V_{CM} = V_S/2, unless otherwise noted.

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|-----------------------|------|-----|-------|
| POWER SUPPLY | | | | | |
| Operating Voltage Range | | 2.1 | | 5.5 | V |
| Quiescent Current/per channel (Output High) | | | 15 | | μA |
| Quiescent Current/per channel (Output Low) | | | 26 | | μA |
| Power Supply Rejection Ratio | V _S = 2.1V to 5.5V, V _{CM} = V _S /2 | | 70 | | dB |
| INPUT | | | | | |
| Input offset voltage | | -4 | ±0.8 | 4 | mV |
| Input Offset Voltage Drift | | | 0.8 | | μV/°C |
| Common-Mode Voltage Range | | (V ₋)-0.1 | | 1.3 | V |
| Common-mode Rejection Ratio | V _{CM} = -0.1V to 1.3V | | 70 | | dB |
| Input Bias Current | | | 2 | | pA |
| Input Offset Current | | | 1 | | pA |
| OUTPUT | | | | | |
| Saturation Voltage | I _O ≤ 4mA | | 96 | | mV |
| Output Pull-up Voltage Range | | | | 5.6 | V |
| Output Current(sinking) | V _O ≤ 1.5V | | 7 | | mA |
| SWITCHING | | | | | |
| Propagation Delay H To L | R _{PU} = 5.1KΩ, Overdrive = 10mV | | 480 | | ns |
| | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 430 | | |
| Propagation Delay L To H | R _{PU} = 5.1KΩ, Overdrive = 10mV | | 820 | | |
| | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 800 | | |
| Fall Time | R _{PU} = 5.1KΩ, Overdrive = 100mV | | 38 | | ns |

TYPICAL CHARACTERISTICS

At $T_A = 25^\circ\text{C}$, $V_S = +5\text{V}$, $V_{CM} = V_S/2$, unless otherwise noted.

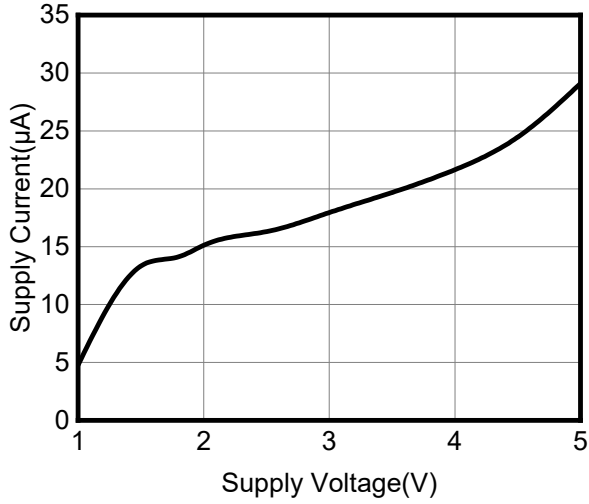


Figure 2. Supply Current vs Supply Voltage Output High

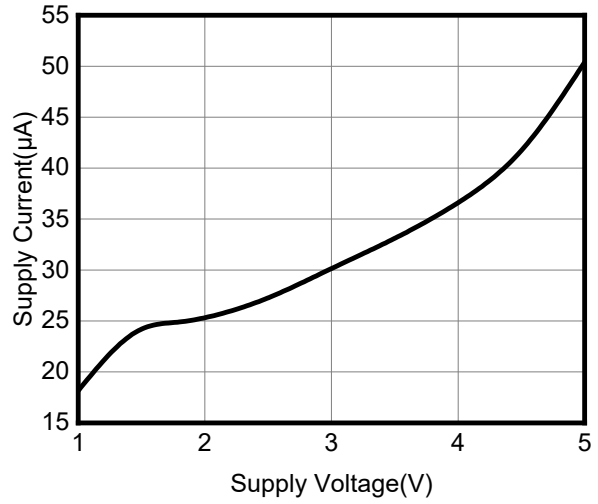


Figure 3. Supply Current vs Supply Voltage Output Low

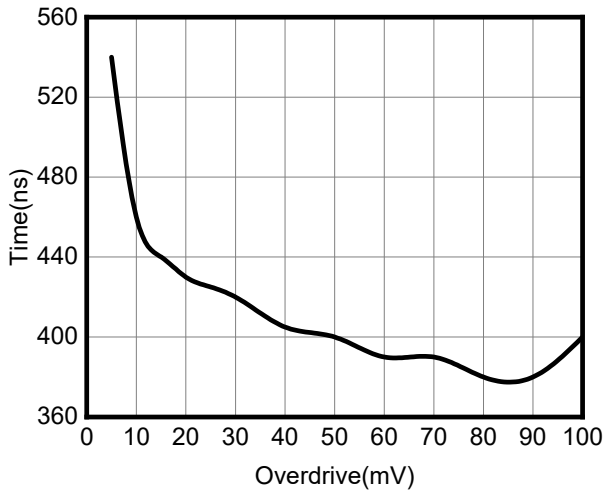


Figure 4. Response Time vs Input Overdrives Negative Transition ($V_{CC}=5\text{V}$)

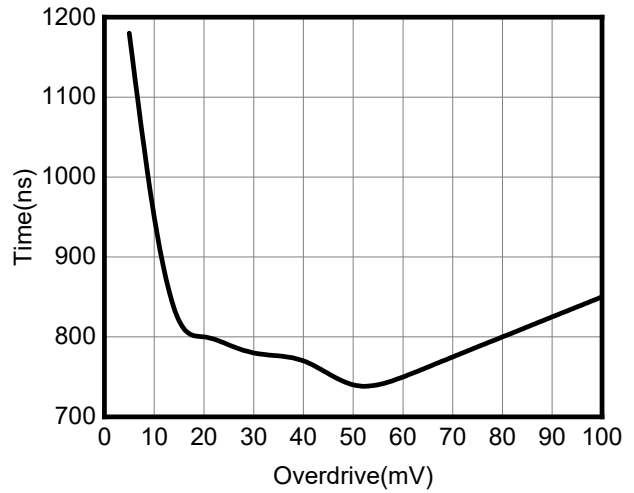


Figure 5. Response Time vs Input Overdrives Positive Transition ($V_{CC}=5\text{V}$)

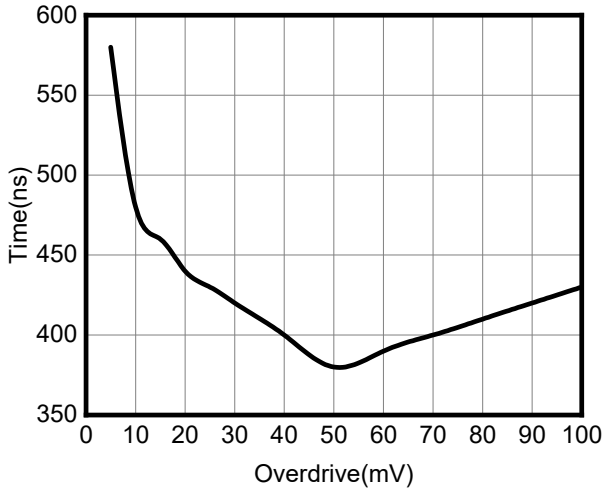


Figure 6. Response Time vs Input Overdrives
Negative Transition($V_{CC}=2.1V$)

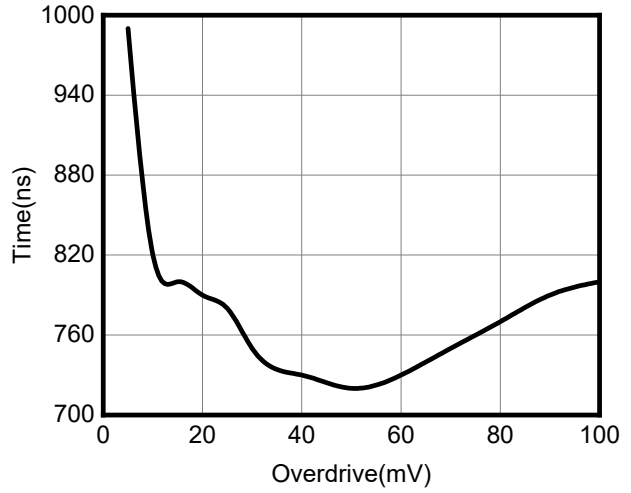


Figure 7. Response Time vs Input Overdrives
Positive Transition($V_{CC}=2.1V$)

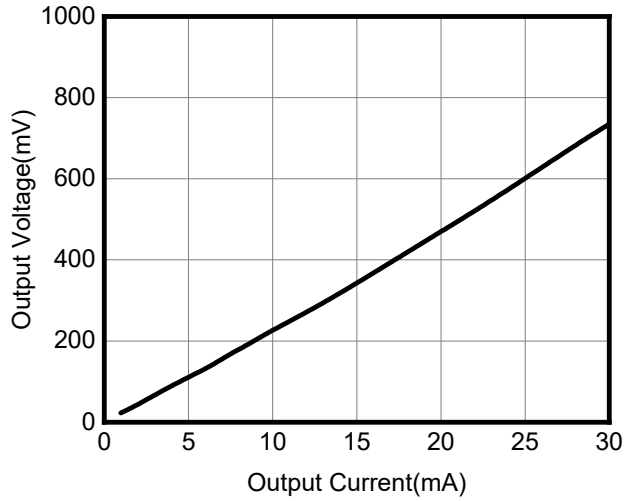


Figure 8. Output Voltage vs Output Current

DETAILED DESCRIPTION

Overview

The LMV331-MS, LMV393-MS and LMV339-MS family of comparators can operate up to 5.5V on the supply pin.

This standard device has proven ubiquity and versatility across a wide range of applications.

This is due to its low power and high speed. The opendrain output allows the user to configure the output's logic low voltage (V_{OL}) and can be utilized to enable the comparator to be used in AND functionality.

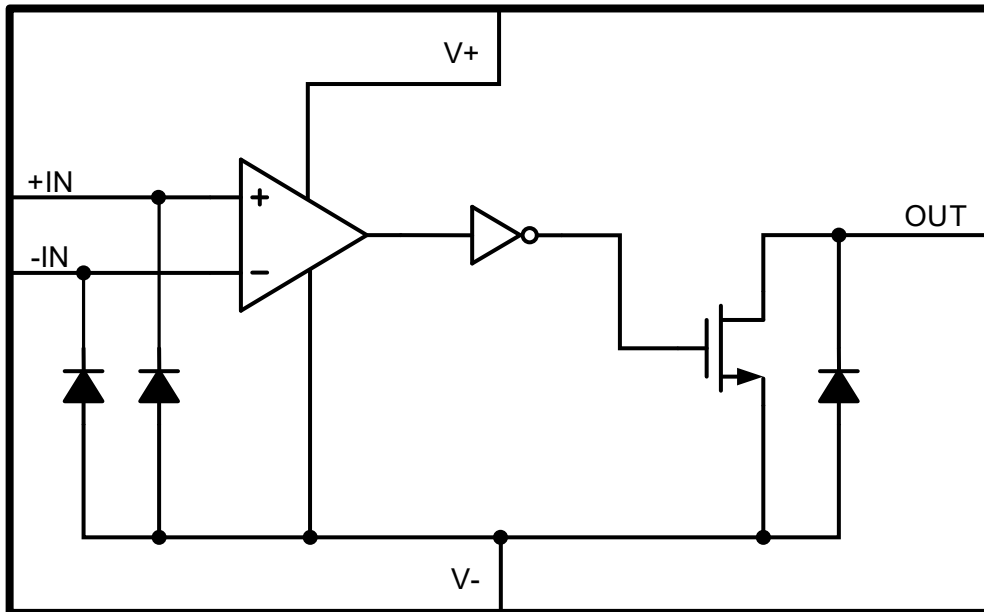


Figure 9. Functional Block Diagram

APPLICATION and IMPLEMENTATION

Application Information

LMV331-MS, LMV393-MS and LMV339-MS will typically be used to compare a single signal to a reference or two signals against each other. Many users take advantage of the open drain output (logic high with pull-up) to drive the comparison logic output to a logic voltage level to an MCU or logic device. **Typical Application**

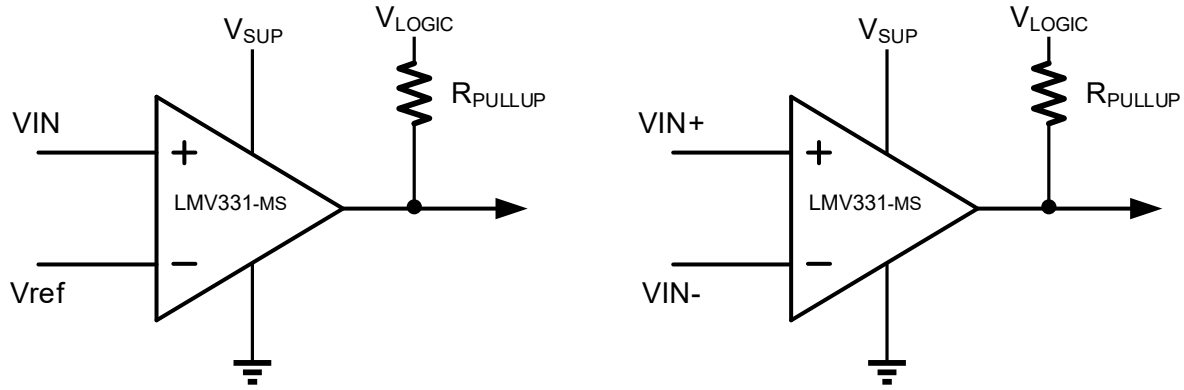


Figure 10. Typical Application Schematic

Power Supply Recommendations

For fast response and comparison applications with noisy or AC inputs, it is recommended to use a bypass capacitor on the supply pin to reject any variation on the supply voltage. This variation causes temporary fluctuations in the comparator's input common mode range and create an inaccurate comparison.

Layout

Layout Guidelines

For accurate comparator applications without hysteresis it is important maintain a stable power supply with minimized noise and glitches, which can affect the high-level input common mode voltage range. In order to achieve this, it is best to add a bypass capacitor between the supply voltage and ground. This should be implemented on the positive power supply and negative supply (if available). If a negative supply is not being used, do not put a capacitor between the IC's GND pin and system ground.

Layout Example


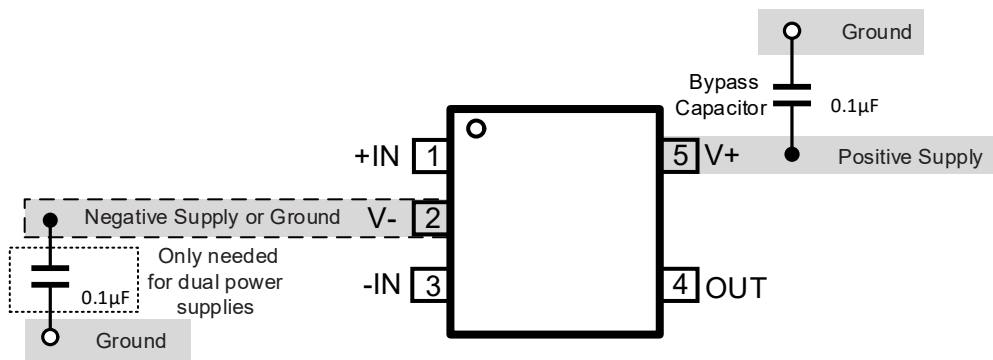


Figure 11. LMV331-MS Layout Example

PACKAGE DESCRIPTION


SOT-23-5

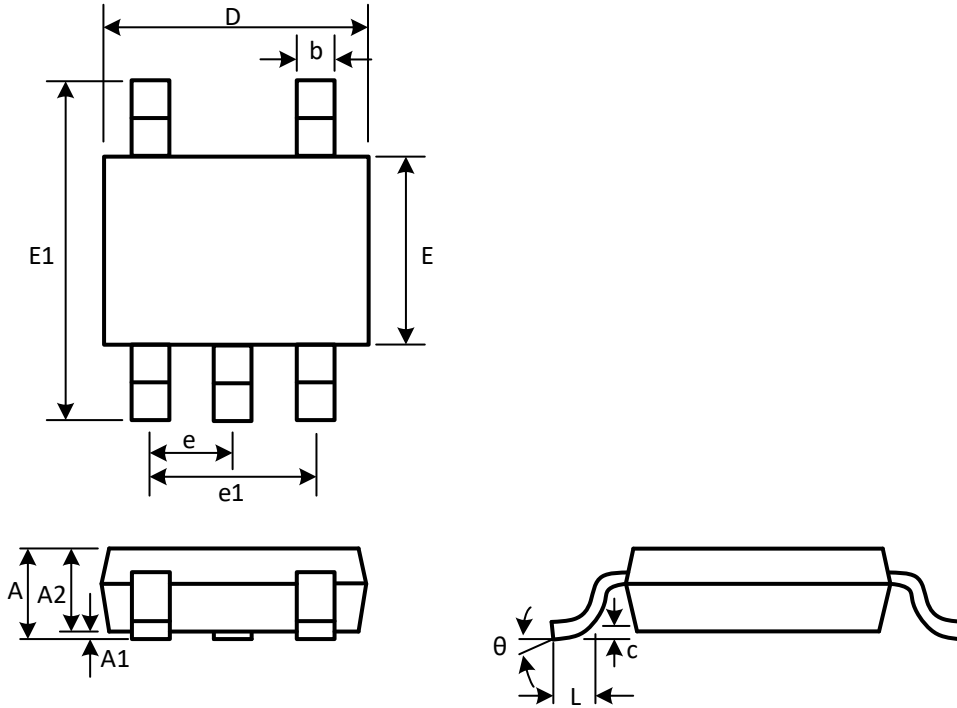

(Unit: mm)

| Symbol | Min | Max |
|----------|------------|-------|
| A | 1.050 | 1.250 |
| A1 | 0.000 | 0.100 |
| A2 | 1.050 | 1.150 |
| b | 0.300 | 0.500 |
| c | 0.100 | 0.200 |
| D | 2.820 | 3.020 |
| e | 0.950(BSC) | |
| e1 | 1.800 | 2.000 |
| E | 1.500 | 1.700 |
| E1 | 2.650 | 2.950 |
| L | 0.300 | 0.600 |
| θ | 0° | 8° |


SOP-8

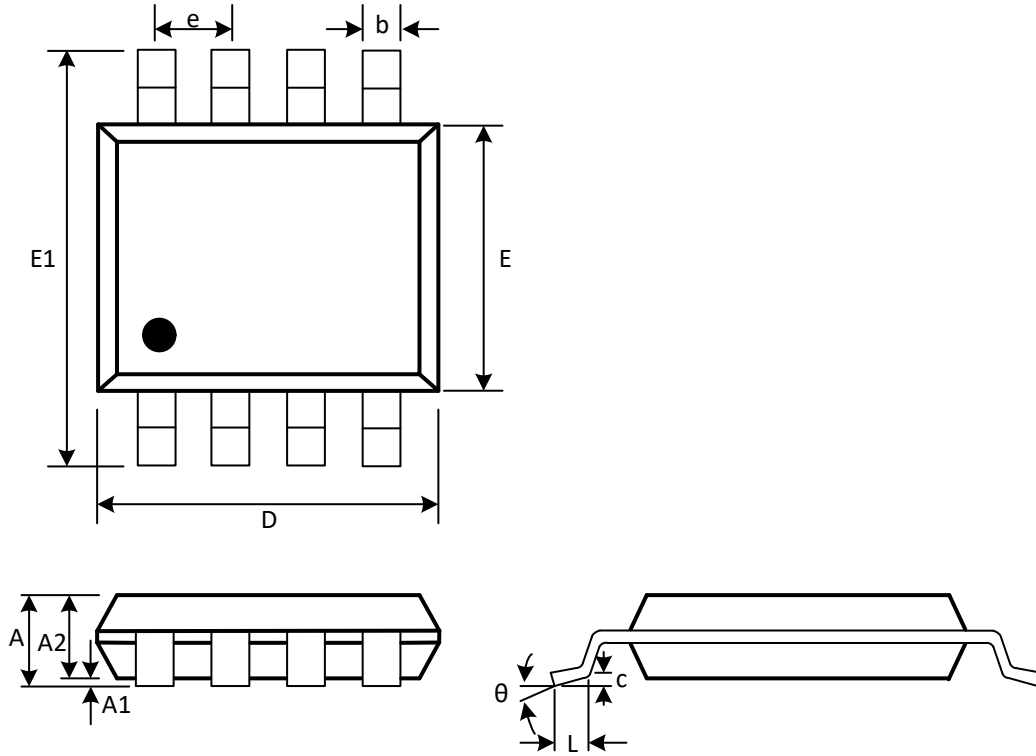

(Unit: mm)

| Symbol | Min | Max |
|----------|------------|-------|
| A | 1.350 | 1.750 |
| A1 | 0.100 | 0.250 |
| A2 | 1.350 | 1.550 |
| b | 0.330 | 0.510 |
| c | 0.170 | 0.250 |
| D | 4.800 | 5.000 |
| e | 1.270(BSC) | |
| E | 3.800 | 4.000 |
| E1 | 5.800 | 6.200 |
| L | 0.400 | 1.270 |
| θ | 0° | 8° |

SOP-14

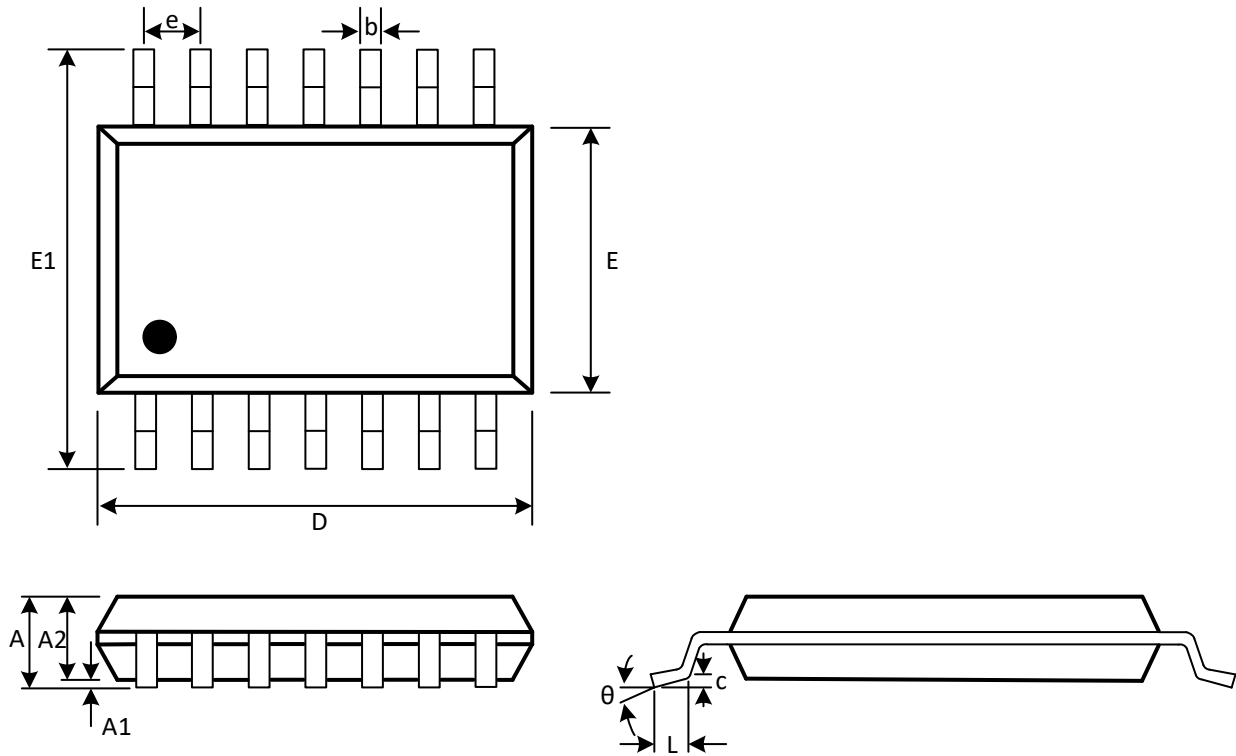

(Unit: mm)

| Symbol | Min | Max |
|--------|------------|-------|
| A | 1.350 | 1.750 |
| A1 | 0.100 | 0.250 |
| A2 | 1.350 | 1.550 |
| b | 0.310 | 0.510 |
| c | 0.100 | 0.250 |
| D | 8.450 | 8.850 |
| e | 1.270(BSC) | |
| E | 5.800 | 6.200 |
| E1 | 3.800 | 4.000 |
| L | 0.400 | 1.270 |
| theta | 0° | 8° |

Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.