

# H3-MABA-010551-CF1071

3-200MHz 75Ω 1:1 Balun


## • APPLICATIONS

• Ideally suitable for CATV broadband applications.

## • FEATURES

- Surface mount
- Impedance ratio: 1:1
- Centre tap on secondary
- RoHS compliant and Pb free
- Available on tape and reel
- 260° reflow compatible

## DIMENSIONS

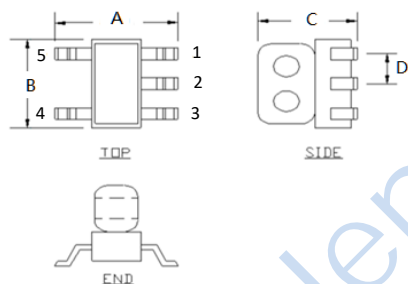

A	B	C
4.26	3.80	3.70
D		
1.27		

Unless otherwise stated dimensions are in mm

Tolerance: .xx ± 0.25, .xxx ± 0.05

## Land Pattern



E	F	G
4.83	3.30	1.40
H	J	
0.76	1.27	

## FUNCTIONAL SCHEMATIC



## PIN CONFIGURATION

Pin No.	Function
1	Secondary Dot
2	Secondary centre tap
3	Secondary
4	Primary
5	Primary Dot

## ELECTRICAL SPECIFICATIONS@25°C:

Parameters (P#: ENA PORT)	frequency band	Min.	Typ.	Max.	Unit
Port Impedance, Z0			75		Ohm
Insertion Loss Pin5 to Pin1	3-5MHz		0.5	1.5	dB
	5-85MHz		0.5	0.8	dB
	85-150MHz		0.7	1	dB
	150-200MHz		0.9	1.2	dB
Insertion Loss Pin5 to Pin3	3-5MHz		0.5	1.5	dB
	5-85MHz		0.5	0.8	dB
	85-150MHz		0.6	0.9	dB
	150-200MHz		0.7	0.9	dB
Input Return Loss	3-5MHz	10.0	23.0		dB
	5-85MHz	18.0	21.0		dB
	85-150MHz	13.0	17.0		dB
	150-200MHz	11.0	15.0		dB
Amplitude Balance	3-200MHz		0.12	0.35	dB
Phase Balance	3-85MHz		0.0	2.0	Deg
	85-200MHz		0.0	3.0	Deg

## ABSOLUTE MAXIMUM RATINGS

Parameter	Value
Input RF Power	250mW Max
DC Current	200mA Max
Operating Temperature Range	-40 to 85°C

Tel: +86-28-85589664


E-mail: mr\_li@henglitaitech.com

Web: www.hltchips.com


Adress: No.198 Tianqin East Street, Gaoxin West District, Chengdu City

## TEST CURVE


Insertion Loss: Pin 5 to Pin 1

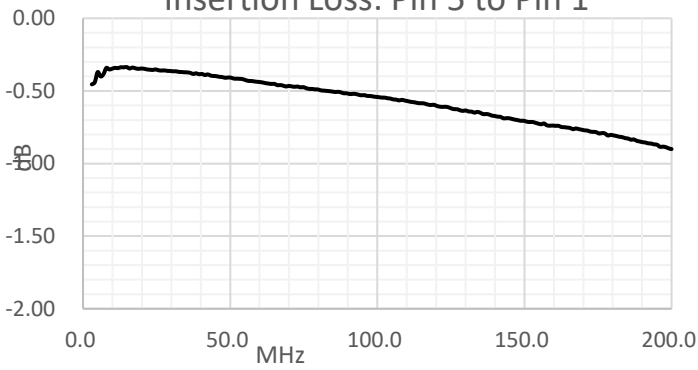


Insertion Loss: Pin 5 to Pin 3

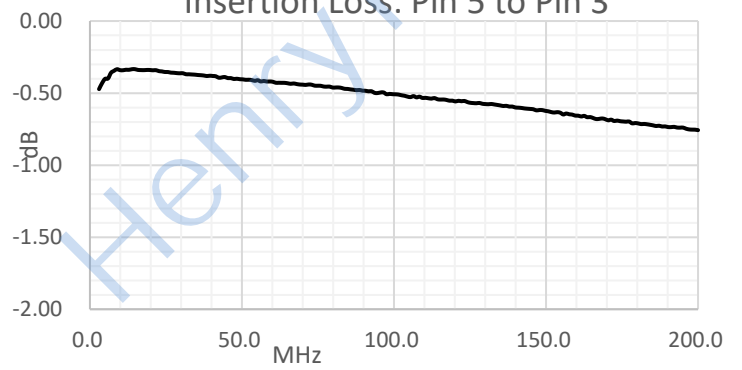

Amplitude Balance

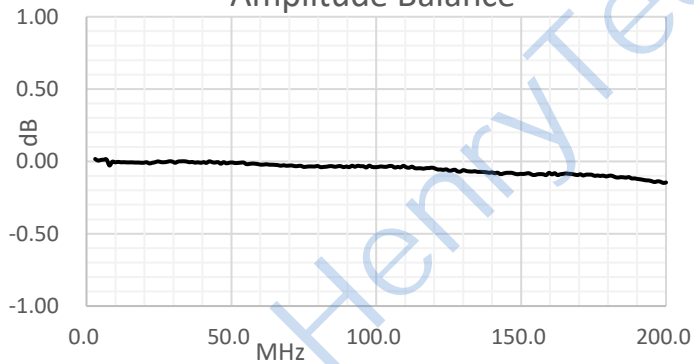

Phase Balance

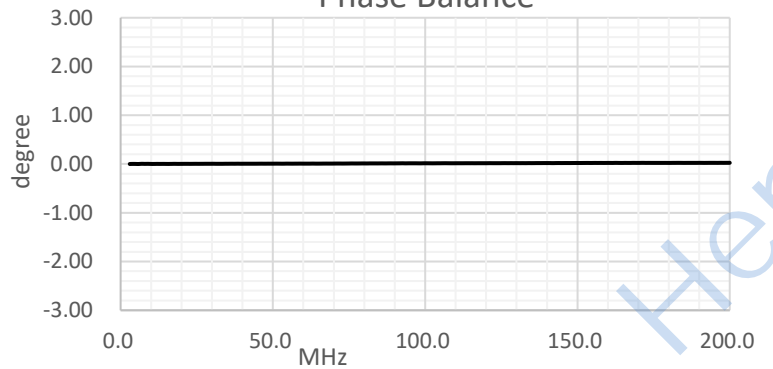

Input Return Loss: Pin 1

