


FEATURES


- Low current.(max.100mA).
- Low voltage..



SOT-23

APPLICATIONS

- General purpose switching and amplification.



ORDERING INFORMATION


Type No.	Marking	Package Code
BC856A/B	3A/3B	SOT-23
BC857A/B/C	3E/3F/3G	SOT-23
BC858A/B/C	3J/3K/3L	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	BC856 -80	V
		BC857 -50	
		BC858 -30	
V_{CEO}	Collector-Emitter Voltage	BC856 -65	V
		BC857 -45	
		BC858 -30	
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-0.1	A
P_C	Collector Dissipation	250	mW
T_j, T_{stg}	Junction and Storage Temperature	-65 to +150	°C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage BC856 BC857 BC858	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-80 -50 -30			V
Collector-emitter breakdown voltage BC856 BC857 BC858	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-65 -45 -30			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -1\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -30V, I_E = 0$		-1	-15	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$			-0.1	μA
DC current gain BC856A,857A,858A BC856B,857B,858B BC857C,858C	h_{FE}	$V_{CE} = -5V, I_C = -2mA$	125 220 420		250 475 800	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -100mA, I_B = -5mA$ $I_C = -10mA, I_B = -0.5mA$			-0.65 -0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -10mA, I_B = -0.5mA$ $I_C = -100mA, I_B = -5mA$		-0.7 -0.85		V
Base-emitter voltage	$V_{BE(on)}$	$I_C = -2mA, V_{CE} = -5V$ $I_C = -10mA, V_{CE} = -5V$	-0.6	-0.65	-0.75 -0.82	V
collector capacitance	C_c	$V_{CB} = -10V, I_E = I_C = 0$ $f = 1MHz$		4.5		pF
Transition frequency	F	$I_C = -200\mu A, V_{CE} = -5V,$ $R_S = 2k\Omega, f = 1kHz,$ $B = 200Hz$		2	10	dB
Transition frequency	f_T	$V_{CE} = -5V, I_C = -10mA$ $f = 100MHz$	100			MHz

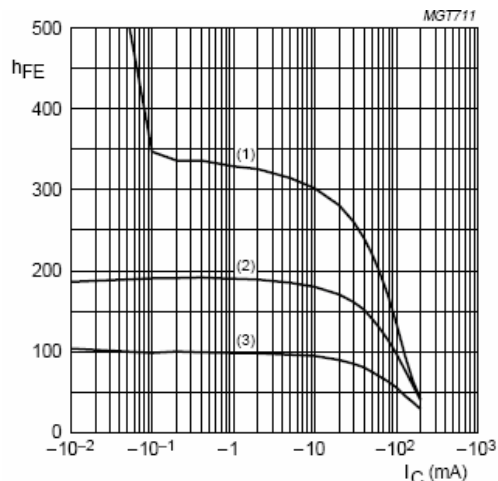TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified


BC857A; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = 150^\circ\text{C}$.
- (2) $T_{amb} = 25^\circ\text{C}$.
- (3) $T_{amb} = -55^\circ\text{C}$.


Fig.1 DC current gain as a function of collector current; typical values.

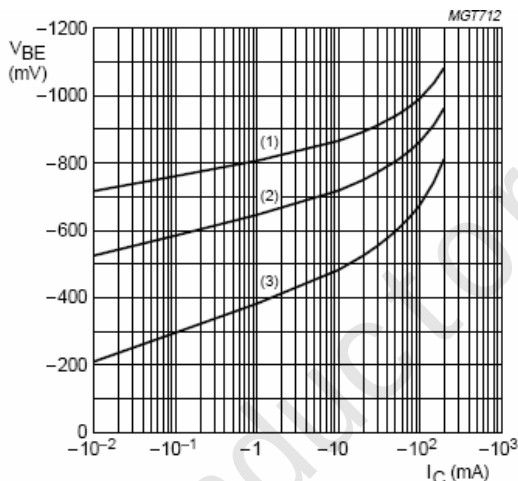

BC857A; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = -55^\circ\text{C}$.
- (2) $T_{amb} = 25^\circ\text{C}$.
- (3) $T_{amb} = 150^\circ\text{C}$.


Fig.2 Base-emitter voltage as a function of collector current; typical values.

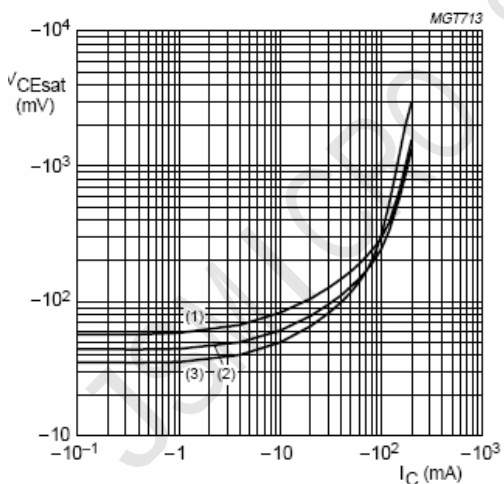

BC857A; $I_C/I_B = 20$.

- (1) $T_{amb} = 150^\circ\text{C}$.
- (2) $T_{amb} = 25^\circ\text{C}$.
- (3) $T_{amb} = -55^\circ\text{C}$.


Fig.3 Collector-emitter saturation voltage as a function of collector current; typical values.

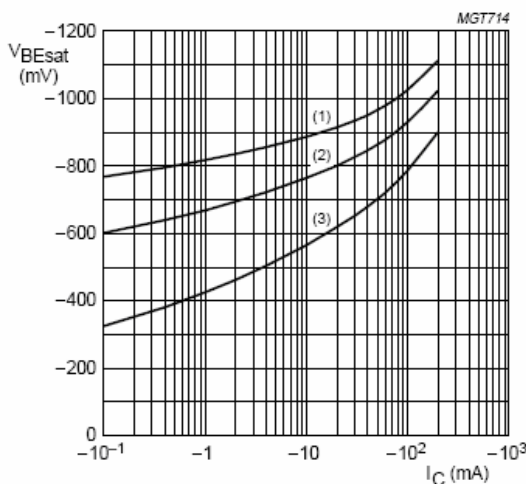

BC857A; $I_C/I_B = 20$.

- (1) $T_{amb} = -55^\circ\text{C}$.
- (2) $T_{amb} = 25^\circ\text{C}$.
- (3) $T_{amb} = 150^\circ\text{C}$.


Fig.4 Base-emitter saturation voltage as a function of collector current; typical values.

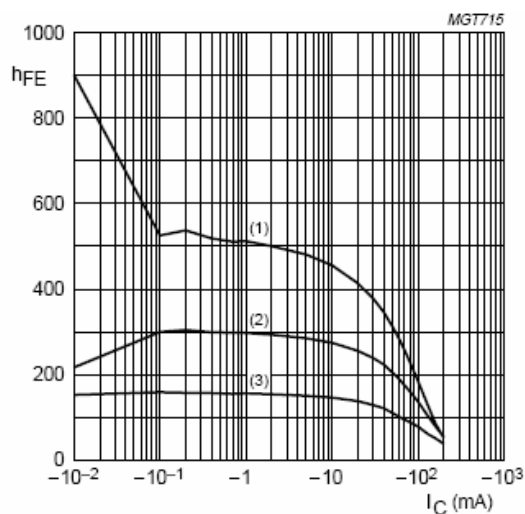

BC857B; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$.


Fig.5 DC current gain as a function of collector current; typical values.

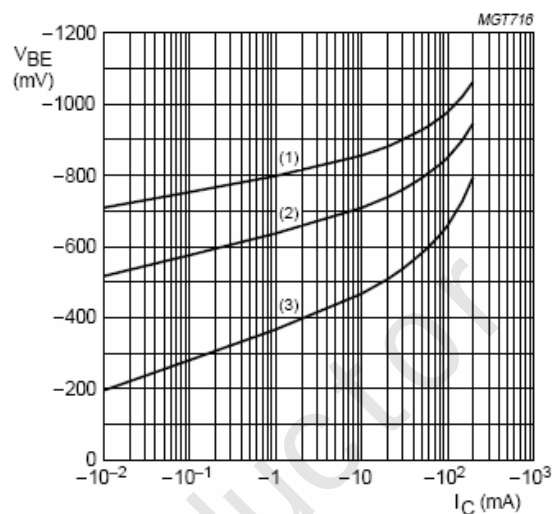

BC857B; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$.


Fig.6 Base-emitter voltage as a function of collector current; typical values.

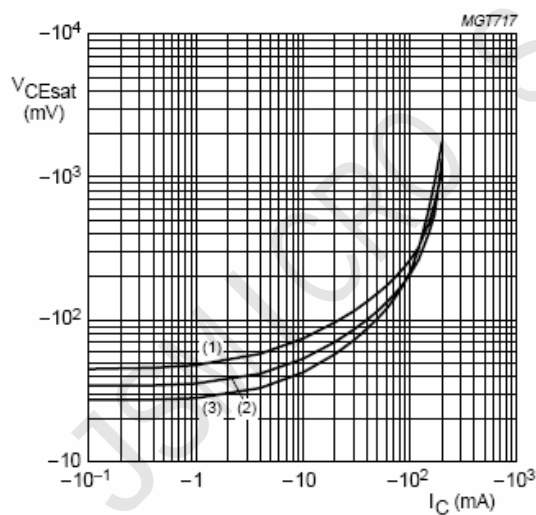

BC857B; $I_C/I_B = 20$.

- (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$.


Fig.7 Collector-emitter saturation voltage as a

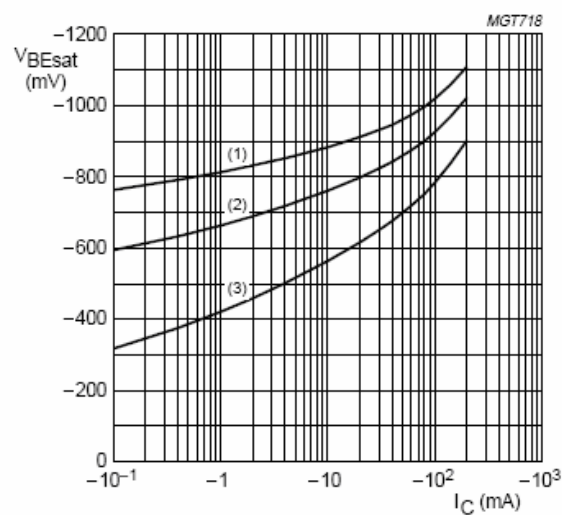

BC857B; $I_C/I_B = 20$.

- (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$.


Fig.8 Base-emitter saturation voltage as a

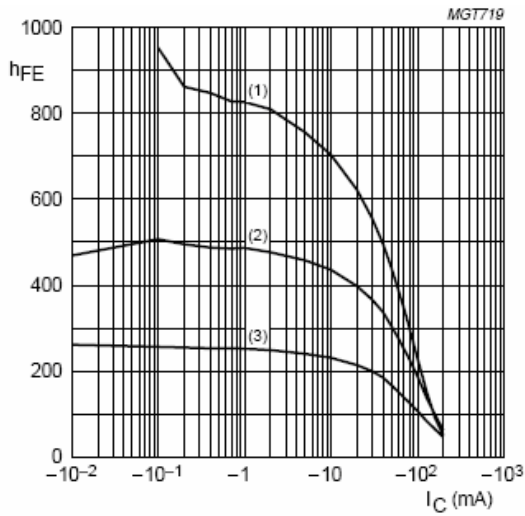

BC857C; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$.


Fig.9 DC current gain as a function of collector current; typical values.

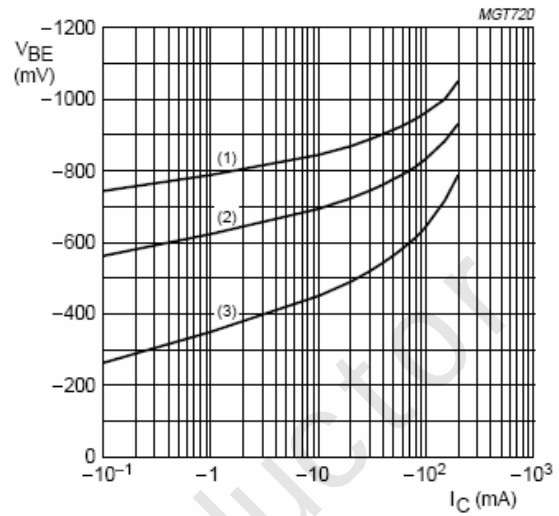

BC857C; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$.


Fig.10 Base-emitter voltage as a function of collector current; typical values.

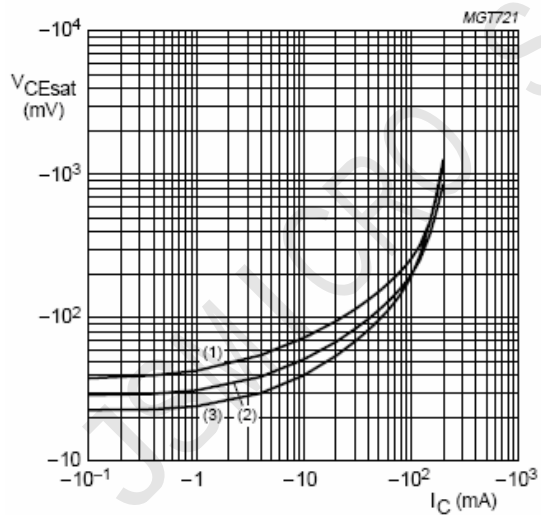

BC857C; $I_C/I_B = 20$.

- (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$.

Fig.11 Collector-emitter saturation voltage as a function of collector current; typical values.

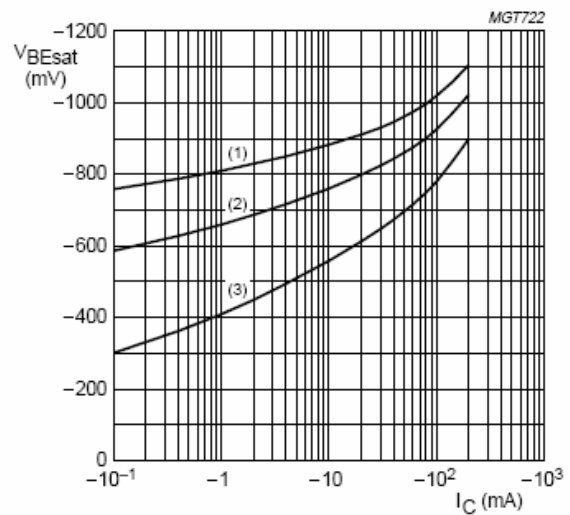

BC857C; $I_C/I_B = 20$.


- (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$.

Fig.12 Base-emitter saturation voltage as a function of collector current; typical values

PACKAGE OUTLINE


Plastic surface mounted package

SOT-23

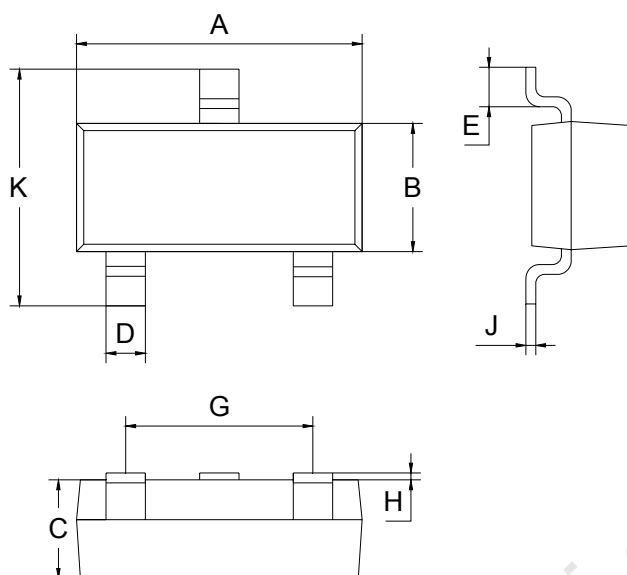

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60
All Dimensions in mm		

SOLDERING FOOTPRINT

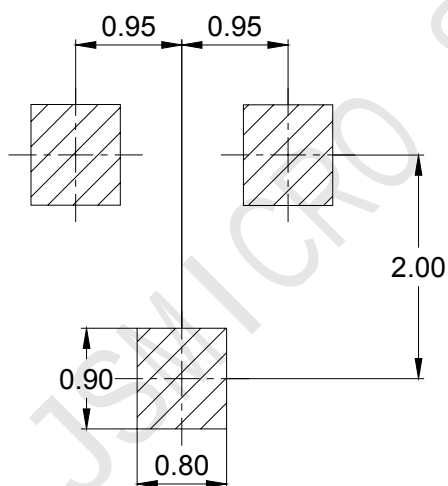

Unit : mm

PACKAGE INFORMATION

Device	Package	Shipping
BC856/857/858	SOT-23	3000/Tape&Reel