

MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

ESD5ZXXX-MS

Product specification

Features

- IEC61000-4-2 Level 4 ESD Protection
- Protects one directional I/O line
- Low clamping voltage
- Working voltages : 2.5V,3.3V, 5V,6V,7V,12V
- Low leakage current



MACHANICAL DATA

- SOD-523 package
- Flammability Rating: UL 94V-0
- Packaging: Tape and Reel
- High temperature soldering guaranted:260°C/10s
- Reel size: 7 inch

APPLICATIONS


- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Peripherals
- Pagers

Reference News

PACKAGE OUTLINE	Circuit Diagram
	
SOD-523	

ESD5Z2.5V-MS	ESD5Z3V3-MS	ESD5Z5V0-MS	ESD5Z6V0-MS
ESD5Z7V0-MS	ESD5Z12V-MS	ESD5Z15V-MS	

Part Number Code

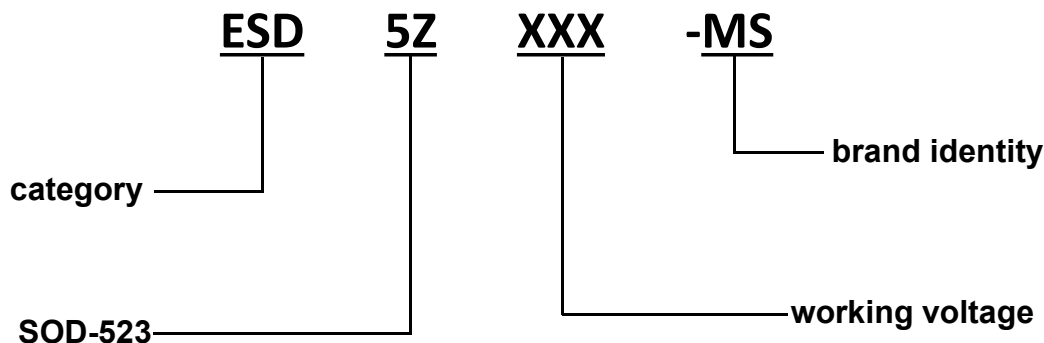

ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	± 30 ± 22	kV
ESD	ESD Voltage per human body model ESD Voltage per machine model	16 400	kV V
P_D	Total Power Dissipation on FR-5 Board (Note 1) @ $T_a=25$	150	mW
T_J, T_{STG}	Junction and Storage Temperature	-55/+150	$^{\circ}C$
T_L	Lead Solder Temperature – Maximum (10 Second Duration)	260	$^{\circ}C$

These ratings are limiting values above which the serviceability of the diode may be impaired

Note 1. FR-5=1.0x0.75x0.62 in.

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$)

PART NUMBER	V_{RWM}	I_R	V_B	I_T	V_C		V_C		P_{PK}	C_J
	(V)	(μA)	(V)	(mA)	(V)		(V)		(W)	(pF)
	Max	Max	Min		Max	@A	Max	@A	Max	Max
ESD5Z2V5-MS	2.5	1.0	4.0	1	9.0	5.0	20.0	13	150	110
ESD5Z3V3-MS	3.3	1.0	5.0	1	10.0	5.0	18.0	12	150	100
ESD5Z5V0-MS	5.0	1.0	6.2	1	11.6	5.0	17.0	11	150	95
ESD5Z6V0-MS	6.0	0.50	6.8	1	13.5	5.0	20.0	10	150	90
ESD5Z7V0-MS	7.0	0.50	7.5	1	14.0	5.0	21.0	9.0	150	80
ESD5Z12V-MS	12.0	0.50	14.1	1	20.0	1.0	28.0	7.0	150	45
ESD5Z15V-MS	15.0	0.50	16.0	1	23.0	1.0	35.0	5.0	150	35

ELECTRICAL CHARACTERISTICS CURVE

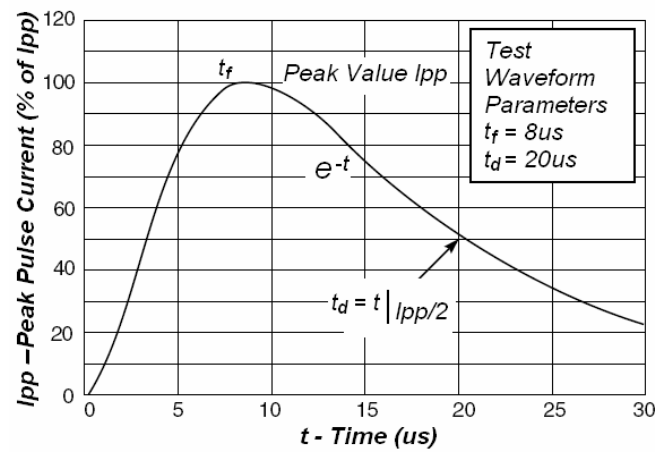


Fig1. Pulse Waveform


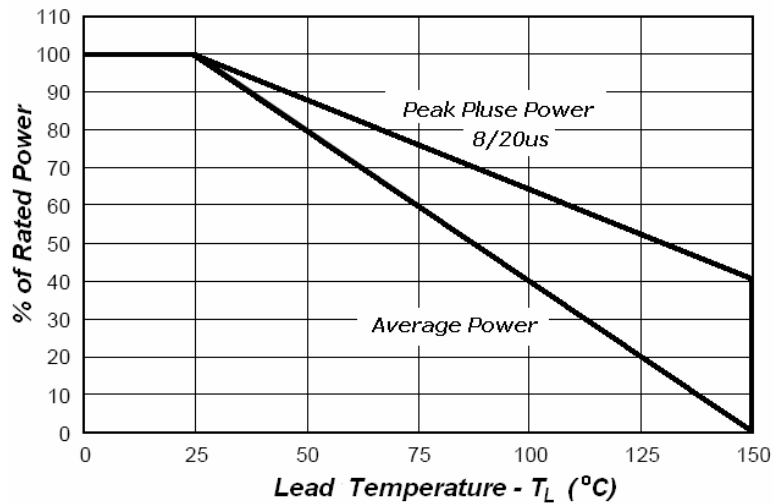



Fig3. Power Derating

PACKAGE MECHANICAL DATA

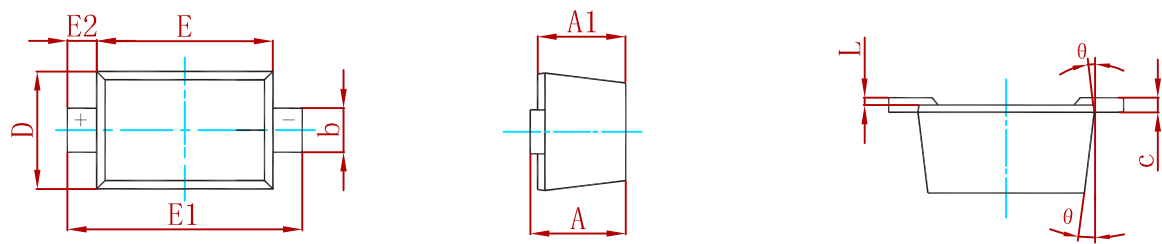

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.031
A1	0.500	0.700	0.020	0.028
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	0.750	0.850	0.030	0.033
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.200 REF		0.008 REF	
L	0.010	0.070	0.001	0.003
θ	7° REF		7° REF	

Suggested Pad Layout

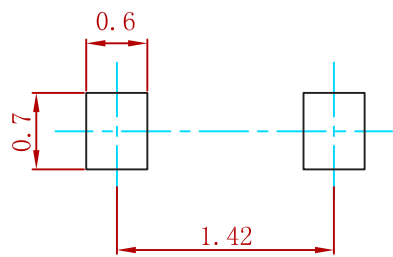

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

REELSPECIFICATION

P/N	PKG	QTY
ESD5ZXXX-MS	SOD-523	3000

Attention

■ Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.

■ MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specification of any and all MSKSEMI Semiconductor products described or contained herein.

■ Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.