

# SMD Power Inductor CR105



## Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 10.4 × 9.5 × 5.8 mm Max.
- Product weight: 1.3g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C~+100°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+100°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging
- 12.9" diameter reel
- 500pcs per reel



## Applications

- Ideally used in Projector, PDA, DSC/DVC, Game Machine, DVD, STB, Notebook PC etc as DC-DC converter inductors.


## Dimension - [mm]

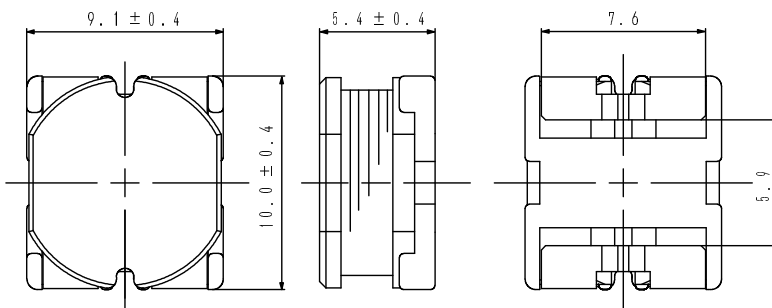

## Land pattern and Schematics - [mm]

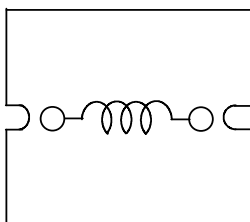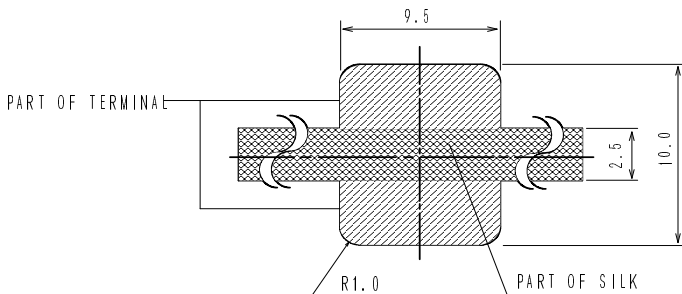

10  $\mu$  H ~ 820  $\mu$  H



1.8  $\mu$  H ~ 8.6  $\mu$  H

# SMD Power Inductor CR105



## Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu$ H) [ within ]※ 1	D.C.R. ( $\Omega$ ) [Max.] at 20°C	Rated Current (A) ※ 2
CR105NP-1R8MC	1R8M	1.8 $\pm$ 20%	13.0m	6.0
CR105NP-2R5MC	2R5M	2.5 $\pm$ 20%	15.6m	5.5
CR105NP-3R3MC	3R3M	3.3 $\pm$ 20%	18.2m	5.0
CR105NP-4R2MC	4R2M	4.2 $\pm$ 20%	20.8m	4.5
CR105NP-5R1MC	5R1M	5.1 $\pm$ 20%	23.4m	4.0
CR105NP-6R3MC	6R3M	6.3 $\pm$ 20%	26.0m	3.6
CR105NP-7R5MC	7R5M	7.5 $\pm$ 20%	28.6m	3.3
CR105NP-8R6MC	8R6M	8.6 $\pm$ 20%	32.5m	3.0
CR105NP-100MC	100M	10 $\pm$ 20%	0.06	2.6
CR105NP-120MC	120M	12 $\pm$ 20%	0.07	2.45
CR105NP-150MC	150M	15 $\pm$ 20%	0.08	2.27
CR105NP-180MC	180M	18 $\pm$ 20%	0.09	2.15
CR105NP-220MC	220M	22 $\pm$ 20%	0.10	1.95
CR105NP-270MC	270M	27 $\pm$ 20%	0.11	1.76
CR105NP-330MC	330M	33 $\pm$ 20%	0.12	1.50
CR105NP-390MC	390M	39 $\pm$ 20%	0.14	1.37
CR105NP-470KC	470K	47 $\pm$ 10%	0.17	1.28
CR105NP-560KC	560K	56 $\pm$ 10%	0.19	1.17
CR105NP-680KC	680K	68 $\pm$ 10%	0.22	1.11
CR105NP-820KC	820K	82 $\pm$ 10%	0.25	1.00
CR105NP-101KC	101K	100 $\pm$ 10%	0.35	0.97
CR105NP-121KC	121K	120 $\pm$ 10%	0.40	0.89
CR105NP-151KC	151K	150 $\pm$ 10%	0.47	0.78
CR105NP-181KC	181K	180 $\pm$ 10%	0.63	0.72
CR105NP-221KC	221K	220 $\pm$ 10%	0.73	0.66
CR105NP-271KC	271K	270 $\pm$ 10%	0.97	0.57
CR105NP-331KC	331K	330 $\pm$ 10%	1.15	0.52
CR105NP-391KC	391K	390 $\pm$ 10%	1.30	0.48
CR105NP-471KC	471K	470 $\pm$ 10%	1.48	0.42
CR105NP-561KC	561K	560 $\pm$ 10%	1.90	0.33
CR105NP-681KC	681K	680 $\pm$ 10%	2.25	0.28
CR105NP-821KC	821K	820 $\pm$ 10%	2.55	0.24

※ 1 .Inductance measuring frequency: 1.8  $\mu$  H ~ 8.6  $\mu$  H ; at 7.96 MHz  
 10  $\mu$  H ~ 82  $\mu$  H ; at 2.52 MHz  
 100  $\mu$  H ~ 820  $\mu$  H ; at 1 kHz













※2. Rated current: The D.C. current at which the inductance decreases to 90% of it's initial value or when  $\Delta t=40^{\circ}\text{C}$ , whichever is lower (Ta=20°C).

# SMD Power Inductor CR105



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

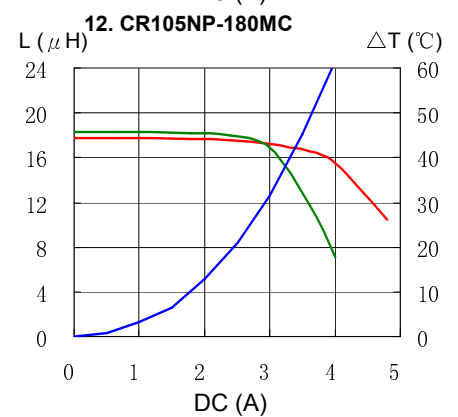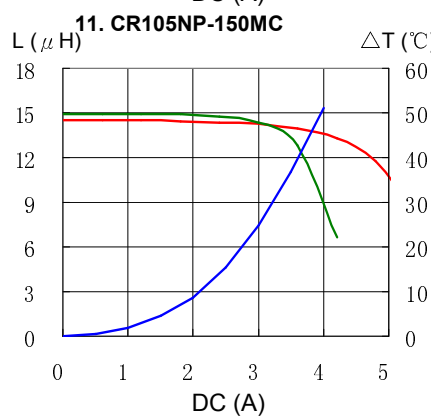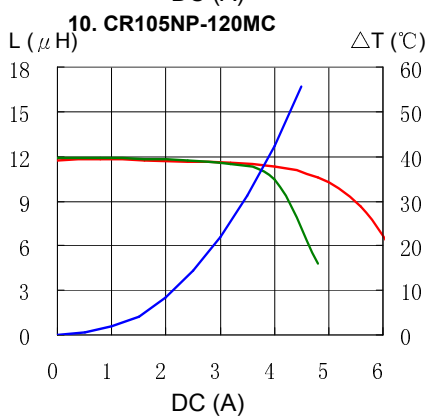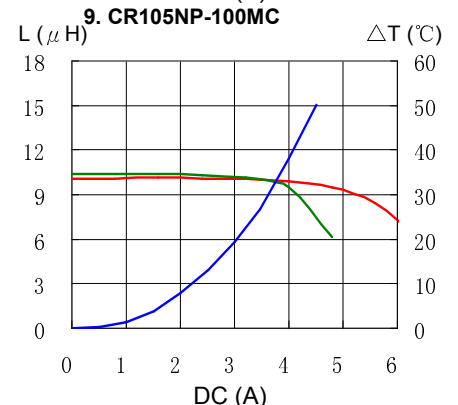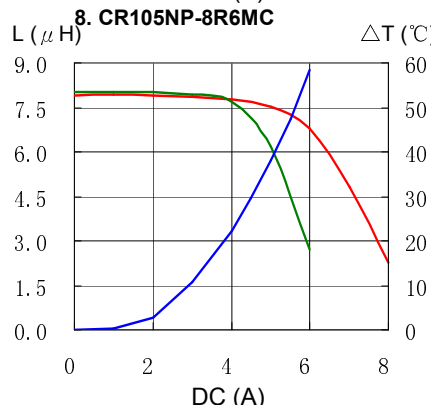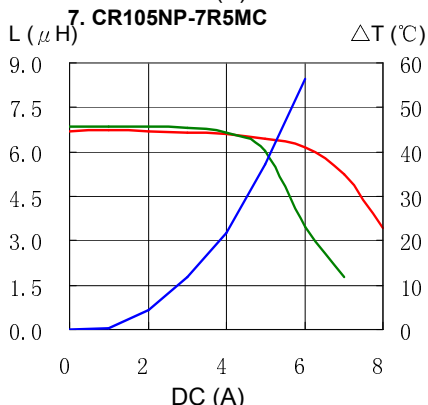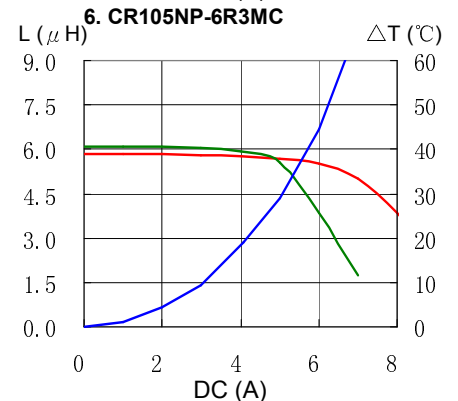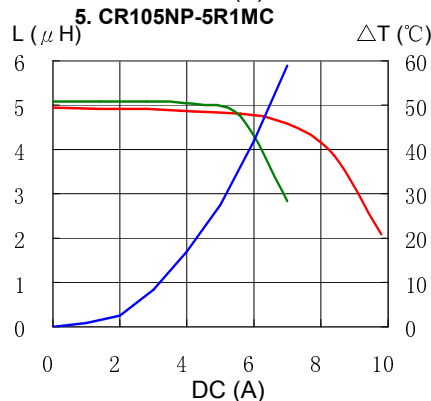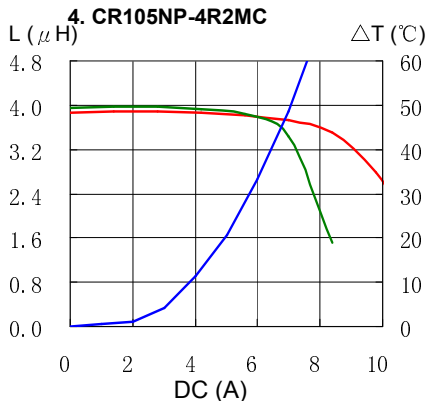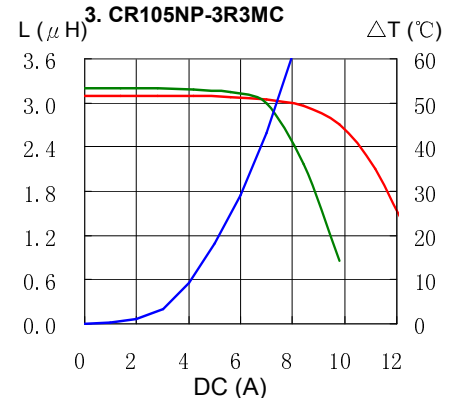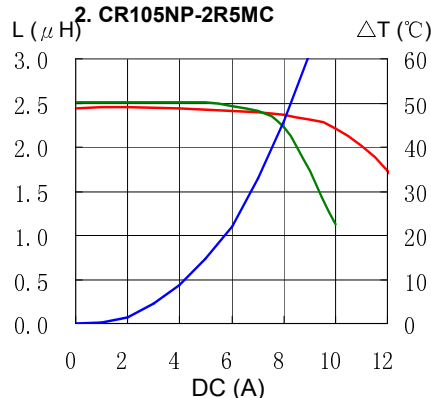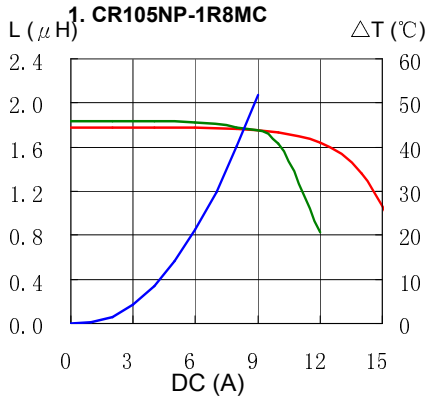











# SMD Power Inductor CR105



## Saturation Current & Temperature Rise Graph



— L (20°C) — L (100°C) —  $\Delta T$

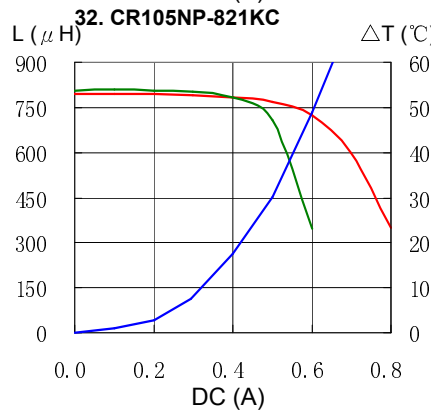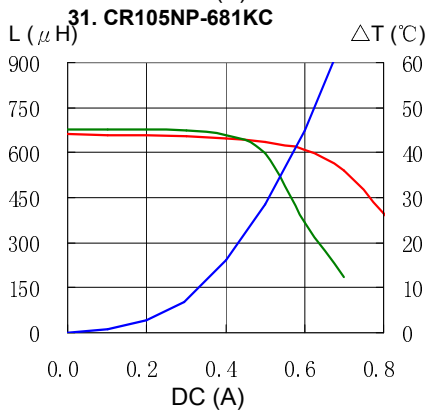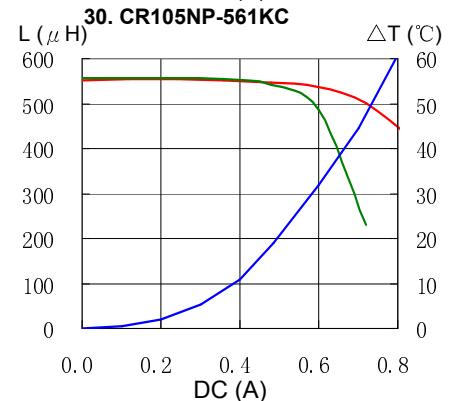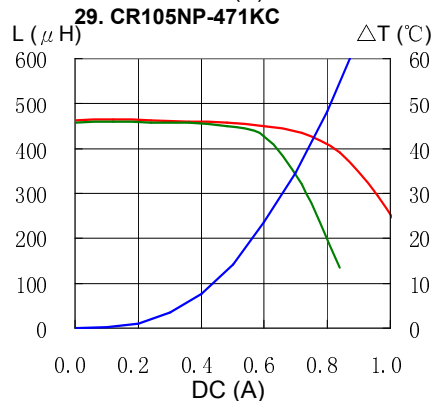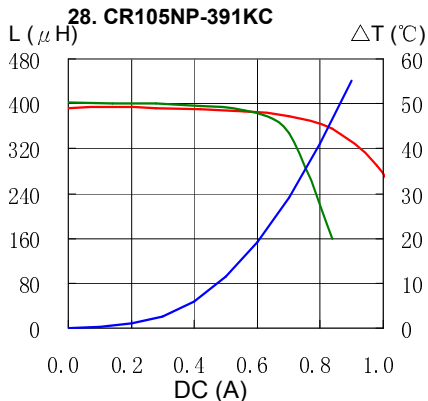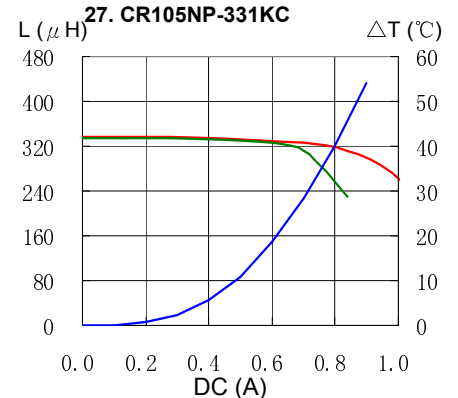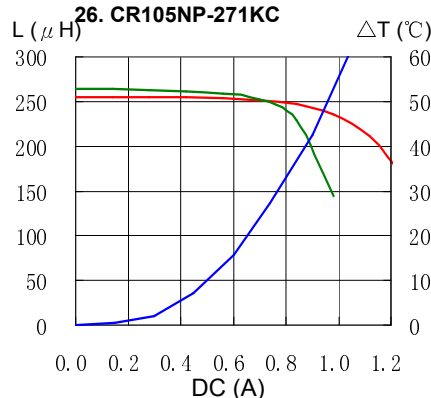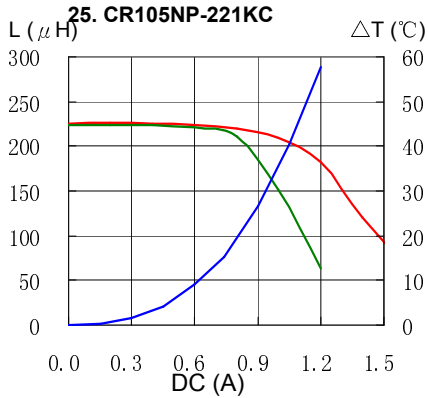

# SMD Power Inductor CR105



## Solder Reflow Condition

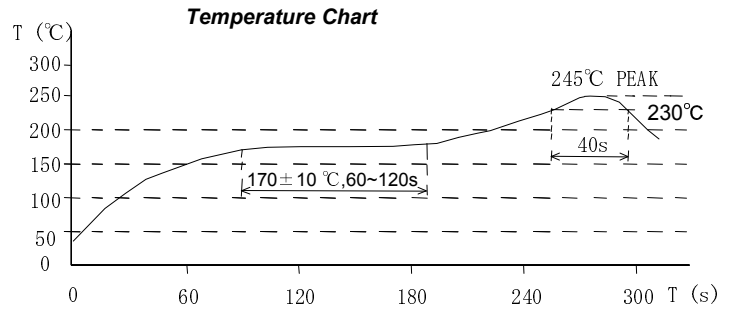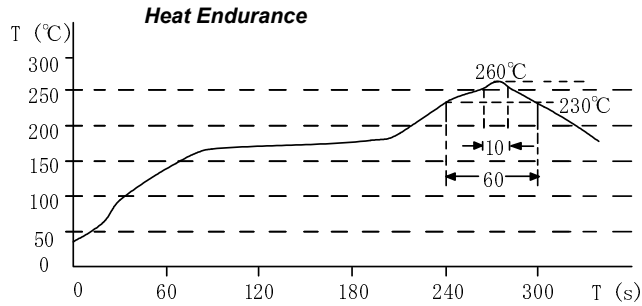

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Oberzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Sumida:

[CR105NP-330MC](#) [CR105NP-560KC](#) [CR105NP-101KC](#) [CR105NP-6R3MC](#) [CR105NP-181KC](#) [CR105NP-331KC](#)  
[CR105NP-390MC](#) [CR105NP-4R2MC](#) [CR105NP-1R8MC](#) [CR105NP-120MC](#) [CR105NP-561KC](#) [CR105NP-220MC](#)  
[CR105NP-150MC](#) [CR105NP-121KC](#) [CR105NP-221KC](#) [CR105NP-7R5MC](#) [CR105NP-470KC](#) [CR105NP-8R6MC](#)  
[CR105NP-270MC](#) [CR105NP-821KC](#) [CR105NP-100MC](#) [CR105NP-180MC](#) [CR105NP-3R3MC](#) [CR105NP-681KC](#)  
[CR105NP-391KC](#) [CR105NP-5R1MC](#) [CR105NP-2R5MC](#) [CR105NP-151KC](#) [CR105NP-271KC](#) [CR105NP-820KC](#)  
[CR105NP-471KC](#)