


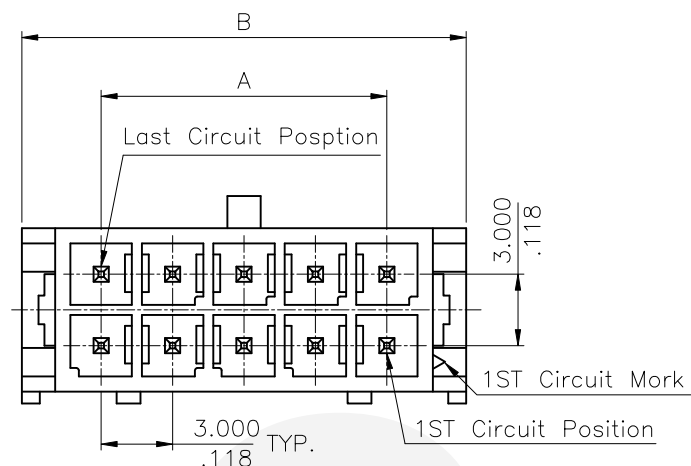

Circuits	Dimension	
	A	B
2	—	6.7(.264)
4	3.00(.118)	9.7(.382)
6	6.00(.236)	12.7(.500)
8	9.00(.354)	15.7(.618)
10	12.00(.472)	18.7(.657)
12	15.00(.591)	21.7(.854)
14	18.00(.709)	24.7(.972)
16	21.00(.827)	27.7(1.091)
18	24.00(.945)	30.7(1.209)
20	27.00(1.063)	33.7(1.327)
22	30.00(1.181)	36.7(1.445)
24	33.00(1.299)	39.7(1.563)

Material:




△* Insulation: High Temperature Plastic
Color Black

* Contact: Brass

Ordering Code:

CP35 ** P 1 V 0 0 -LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuits: 02~24
- ③ Contact type: P = Plug
- ④ Contact plated:
1= Matte Tin over Nickel
- ⑤ V= Straight
- ⑥ Mount type : 0= Dip Type
- ⑦ Other options: 0= With pegs(Standard)
- ⑧ LF= For Lead Free IR Process

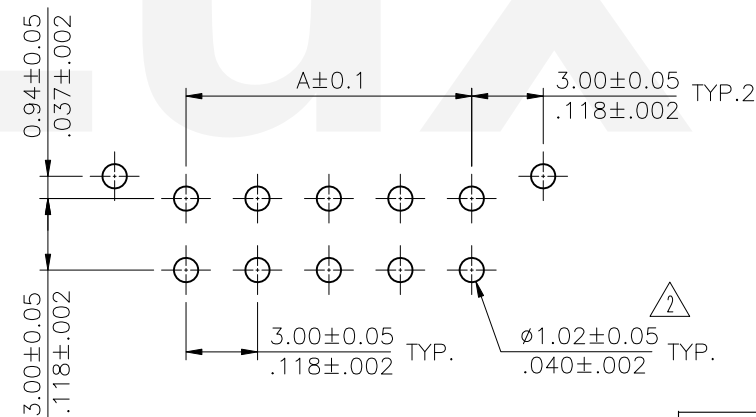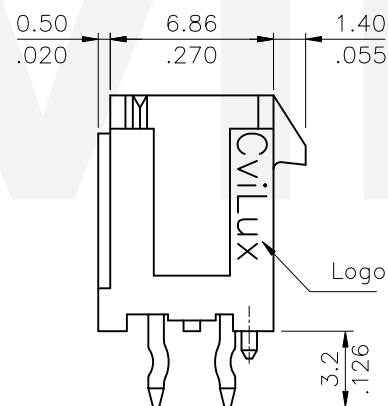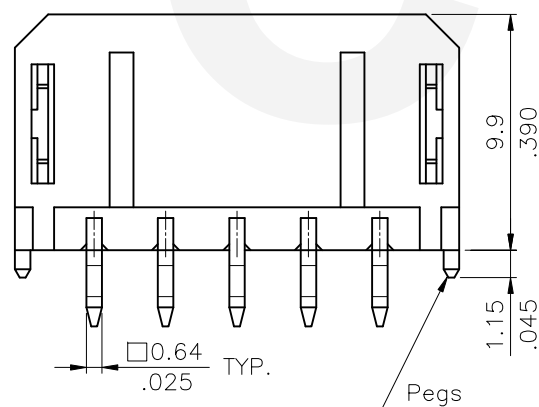

Recommended P.C. Board layout

RoHS Compliant

△4					DATE	UNIT: mm / inch	TITLE: 3.00mm PITCH STRAIGHT HEADER POWER CONNECTOR	 瀚荃股份有限公司 CviLux Corporation			
△3					DRAWN BY: Kenny	8/20-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
△2	Kenny	8/20-20'	ECNT120218		ENGINEER: Sun	8/25-20'	.X ± 0.30/.012 .X' ± 1'	MATERIAL:	DRAWING NO. CP3550SC	PART NO. CP35**P1V00-LF	
△1	Michelle	11/12-19'	ECRB11905/ECNT119313		CHECKED BY: Eisley	8/25-20'	.XX ± 0.20/.008 .X' ±	FINISH:	SCALE 3 / 1	SHEET 1 OF 1	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Eisley	8/25-20'	.XXX ± 0.10/.004 .XX' ±				

CVILUX
2020.08.27
ISSUED