San Ace 60 V 9WPA type

Splash Proof Fan

Features

High Airflow and High Static Pressure

This fan delivers a maximum airflow of 1.52 m³/min and a maximum static pressure of 357 Pa.

Compared with the current models, (1) the maximum airflow has increased by 2 times and maximum static pressure has increased by 4 times.

Water and Dust Resistance

These fans have IP68-rated⁽²⁾ water and dust protection. They maintain stable operation even in harsh environments.

Low Noise and High Energy Efficiency

The PWM control function enables the control of fan speed, contributing to lowering noise and improving energy efficiency of devices.

(1) Current models: San Ace 60 9WP type $60 \times 60 \times 25$ mm DC Fan (model nos. 9WP0612G401, 9WP0624G401).

(2) The degree of protection (IP code) is defined by IEC 60529 (International Electrotechnical Commission). IP68:

Completely protected against dust

Protected against submersion in water

IPX8 Requirements

When the power is off, the fan is submerged in water pressurized to the equivalent of 2 meters for 60 minutes. Then it's run for 15 minutes at the rated voltage in free-air. During the test, there shall be no reduction in dielectric strength or fan characteristics.



Image depicts product without ribs

60×60×25 mm

Specifications

The models listed below have ribs and pulse sensors with PWM control function. For models without ribs, append "1" to the end of model numbers.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. a		Max. stat	tic pressure [inchH ₂ O]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9WPA0612P4G001	12	10.8 to 13.2	100	0.93	11.16	12000	1.52	53.7	357	1.44	56	20 to +70	40000/60°C (70000/40°C)
			20	0.09	1.08	3500	0.41	14.5	31	0.13	22		
9WPA0624P4G001	24	21.6 to 26.4	100	0.46	11.04	12000	1.52	53.7	357	1.44	56		
			20	0.05	1.2	3500	0.41	14.5	31	0.13	22		

^{*} PWM input frequency is 25 kHz; models without specifications at 0% PWM duty cycle have zero fan speed at 0%.

Models with the following sensor specifications are also available as options: Without sensor Lock sensor


Common	Specifications
--------	-----------------------

☐ Material ······	Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)
☐ Expected life · · · · · · · · · · · · · · · · · · ·	Refer to specifications (L10 life: 90% survival rate for continuous operation in indoor free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
\square Motor protection function · · · · · · · · · · · · · · · · · · ·	Locked rotor burnout protection, Reverse polarity protection
\square Dielectric strength · · · · · · · · · · · · · · · · · · ·	50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
\square Insulation resistance · · · · · · · · · · · · · · · · · · ·	10 $\mbox{M}\Omega$ or more with a 500 VDC megger (between lead wire conductors and frame)
\square Sound pressure level (SPL) · · · · · · · · · · · · · · · · · · ·	At 1 m away from the air inlet
\square Operating temperature · · · · · · · · · · · · · · · · · · ·	Refer to specifications (Non-condensing)
\square Storage temperature $\cdots \cdots \cdots$	-30 to +70°C (Non-condensing)
\square Lead wire · · · · · · · · · · · · · · · · · · ·	\oplus Red $\ \ominus$ Black Sensor Yellow Control Brown
\square Mass ······	110 g
□ Ingress protection ······	IP68


San Ace 60 W 9WPA type

Airflow - Static Pressure Characteristics


· PWM duty cycle



· Operating voltage range




PWM Duty - Speed Characteristics Example



PWM Input Signal Example

Input signal waveform




 $V_{IH}=4.75$ to 5.25 V $V_{IL}=0$ to 0.4 V PWM duty cycle (%) = $\frac{T_1}{T} \times 100$ PWM frequency 25 (kHz) = $\frac{1}{T}$ Current source (Isource) = 1 mA max. (when control voltage is 0 V) Current sink (Isink) = 1 mA max. (when control voltage is 5.25 V)

Control terminal voltage = 5.25 V max. (when control terminal is open)

When the control terminal is open, fan speed is the same as when PWM duty cycle is 100%. Either TTL input, open collector or open drain can be used for


PWM control input signal.

Example of Connection Schematic



Specifications for Pulse Sensors

Output circuit: Open collector



Rated voltage 12 V fan

 $V_{CE} = +13.2 \text{ V max.}$ $I_C = 5 \text{ mA max.} [V_{OL} = V_{CE} \text{ (SAT)}]$

 $Ic = 5 \text{ mA max.} [V_{OL} = V_{CE} (SAT) = 0.8 \text{ V max.}]$


Rated voltage 24 V fan


 $V_{CE} = +26.4 \text{ V max}.$

 $Ic = 5 \text{ mA max.} [V_{OL} = V_{CE} (SAT) = 0.8 \text{ V max.}]$

Output waveform (Need pull-up resistor)

In case of steady running



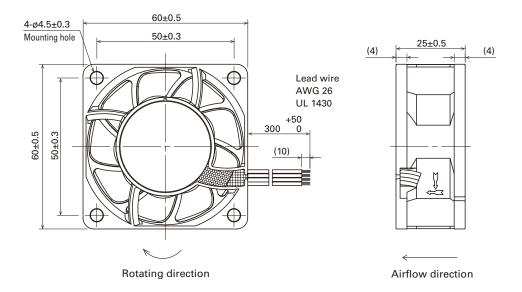

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

