

---

## 6-Port AVB/TSN Gigabit Ethernet Switch with Integrated 100BASE-T1 PHYs

---

### Highlights

- 3x 100BASE-T1 ports
- 1x 100BASE-TX port
- 2x RGMII/RMII/MII ports
- Cascade mode for higher port count
- Enhanced EMC performance
- Full AVB Audio Video Bridging
- Time Sensitive Networking Support
- High Available Seamless Redundancy (HSR)
- OPEN Alliance TC10 Sleep/Wakeup
- Over-temperature and under-voltage detection
- LinkMD®+ enhanced cable diagnostics
- FlexPWR® technology power management
- Small-footprint 128-pin TQFP (14 x 14 mm) package
- Pin compatible with LAN9372/3/4
- AEC-Q100 automotive product qualification
- Grade 2 Automotive temperature (-40°C to +105°C)

### Target Applications

- Advanced Driver-Assistance Systems (ADAS)
- Infotainment
- Telematics & Smart Antennas
- In-Vehicle Backbone
- Gateways

### Features

- Switch Management Capabilities
  - Compliant to OPEN TC11 switch requirements
  - 1K MAC table
  - IEEE 802.1Q VLAN support
  - AVB and TSN hardware support:
    - IEEE 802.1AS time synchronization
    - IEEE 1588v2 PTP and clock synchronization
    - IEEE 802.Qav traffic shaping
    - IEEE 802.1Qbv (TSN) time-aware scheduler
    - IEEE 802.1Qci (TSN) ingress filtering and policing
  - 8 shapers per port, one for each queue
  - Smart low-latency cut-through forwarding mode
  - High Availability Seamless Redundancy (HSR)
  - Deep Packet Inspection (DPI) using TCAM
    - TCAM classification of Layers 2,3,4 and beyond
  - SPI or in-band host processor access
  - Wire speed - non-blocking

- 3x Integrated 100BASE-T1 Ethernet PHYs
  - Compliant with IEEE 802.3bw-2015
  - 100Mbps over single balanced twisted pair cable
  - Extended cable reach >15m
  - On-chip filtering & termination for balanced UTP cable
- 1x Integrated 100BASE-TX/10BASE-T Port
  - Compliant with IEEE 802.3/802.3u
  - Auto-negotiation and Auto-MDI/MDI-X support
  - On-chip termination resistors and internal biasing
- 2x Configurable External MAC Ports
  - Reduced Gigabit Media Independent Interface (RGMII)
  - Reduced Media Independent Interface (RMII) with 50MHz reference clock input/output option
  - Media Independent Interface (MII) in PHY/MAC mode
- IEEE 1588v2 PTP and Clock Synchronization
  - Transparent Clock (TC) with auto correction update
  - Leader and Follower Ordinary Clock (OC) support
  - End-to-end (E2E) or peer-to-peer (P2P)
  - PTP multicast and unicast message support
  - PTP message transport over IPv4/v6 and IEEE 802.3
  - IEEE 1588v2 PTP packet filtering
  - Time Aware Precision GPIO
- Advanced Diagnostics & Security
  - OPEN Alliance (TC1) advanced diagnostics compliant
  - LinkMD®+ cable diagnostic capabilities
    - Determines cable opens/shorts/length (TX & T1)
    - Signal Quality Indicator (SQI) with MSE, peak values, and peak/threshold interrupt (T1)
  - Self-test packet generator/detector
    - Single burst and continuous traffic stream support
    - Automatic L2 and configurable L3 and L4 headers
  - Loopback modes (per IEEE 802.3bw)
  - Extended MIB performance counters
  - Deep packet inspection support for every packet/port
  - IEEE 802.1AR (802.1x) port and MAC authentication
  - IEEE 802.1Qci per stream ingress filtering & policing
- EtherGREEN™ Energy Efficiency
  - Low-power 100BASE-T1 PHY technology
  - OPEN Alliance TC10 sleep/wakeup (partial networking)
  - Non-TC10 link partner energy detect wake-up support
  - Ultra-Deep-Sleep power down
- Low RF Emissions
  - Integrated transmission filtering
  - xMII data and 125MHz clock include programmable slew rate control
  - OPEN Alliance (TC6) RGMII EPL compliant
  - Exceeds OPEN Alliance Transceiver EMC Test Specification

## TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at [docerrors@microchip.com](mailto:docerrors@microchip.com). We welcome your feedback.

### Most Current Documentation

To obtain the most up-to-date version of this documentation, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

### Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include -literature number) you are using.

### Customer Notification System

Register on our web site at [www.microchip.com](http://www.microchip.com) to receive the most current information on all of our products.

---

---

## Table of Contents

1.0 Preface .....	4
2.0 Introduction .....	8
3.0 Pin Descriptions and Configuration .....	10
4.0 Package Information .....	19
Appendix A: Product Brief Revision History .....	23
The Microchip Web Site .....	24
Customer Change Notification Service .....	24
Customer Support .....	24
Product Identification System .....	25

## 1.0 PREFACE

### 1.1 General Terms

TABLE 1-1: GENERAL TERMS

Term	Description
<b>1000BASE-T</b>	1 Gbps Ethernet over twisted pair, IEEE 802.3 compliant
<b>100BASE-T1</b>	100 Mbps Ethernet over single balanced twisted pair, IEEE 802.3bw compliant
<b>100BASE-TX</b>	100 Mbps Ethernet over twisted pair, IEEE 802.3 compliant
<b>10BASE-T</b>	10 Mbps Ethernet over twisted pair, IEEE 802.3 compliant
<b>ACL</b>	Access Control List
<b>ADAS</b>	Advanced Driver Assistance Systems
<b>ADC</b>	Analog-to-Digital Converter
<b>AFE</b>	Analog Front End
<b>AN, ANEG</b>	Auto-Negotiation
<b>ARP</b>	Address Resolution Protocol
<b>AVB</b>	Audio Video Bridging
<b>BELT</b>	Best Effort Latency Tolerance
<b>BYTE</b>	8-bits
<b>CRC</b>	Cyclic Redundancy Check
<b>CSMA/CD</b>	Carrier Sense Multiple Access/Collision Detect
<b>CSR</b>	Control and Status Register
<b>DA</b>	Destination Address
<b>DoD</b>	Delay on Destination
<b>DoS</b>	Delay on Source
<b>DWORD</b>	32-bits
<b>E2E</b>	End to End
<b>EC</b>	Embedded Controller
<b>EEE</b>	Energy Efficient Ethernet
<b>EOF</b>	End of Frame
<b>FCS</b>	Frame Check Sequence
<b>FID</b>	Filter ID
<b>FIFO</b>	First In First Out buffer
<b>FSM</b>	Finite State Machine
<b>FW</b>	Firmware
<b>GMII</b>	Gigabit Media Independent Interface
<b>GPIO</b>	General Purpose I/O
<b>gPTP</b>	Generic Precision Time Protocol
<b>HOST</b>	External system (Includes processor, application software, etc.)

**TABLE 1-1: GENERAL TERMS (CONTINUED)**

Term	Description
<b>HSR</b>	High-availability Seamless Redundancy
<b>HW</b>	Hardware. Refers to function implemented by digital logic.
<b>IEEE</b>	Institute of Electrical and Electronic Engineers
<b>IGMP</b>	Internet Group Management Protocol
<b>IP</b>	Internet Protocol
<b>IPV</b>	Internal Priority Value
<b>ISO</b>	International Standards Organization
<b>ITU</b>	International Telecommunications Union
<b>L2</b>	Layer 2
<b>L3</b>	Layer 3
<b>L4</b>	Layer 4
<b>LDO</b>	Linear Drop-Out Regulator
<b>LIDAR</b>	Light Detection and Ranging
<b>LPM</b>	Link Power Management
<b>lsb</b>	Least Significant Bit
<b>LSB</b>	Least Significant Byte
<b>MAC</b>	Media Access Controller
<b>MDI</b>	Medium Dependent Interface
<b>MDIX</b>	Media Independent Interface with Crossover
<b>MII</b>	Media Independent Interface
<b>MSTP</b>	Multiple Spanning Tree Protocol
<b>N/A</b>	Not Applicable
<b>Nonce</b>	An arbitrary number that is used only once
<b>NoQ</b>	Number of Queues
<b>NumP</b>	Number of Ports
<b>OC</b>	Ordinary Clock
<b>OTP</b>	One Time Programmable
<b>P2P</b>	Peer to Peer
<b>PCS</b>	Physical Coding Sublayer
<b>PIO</b>	Programmable Input and Output
<b>PLL</b>	Phase Locked Loop
<b>PMIC</b>	Power Management IC
<b>POR</b>	Power on Reset.
<b>PPS</b>	Packets Per Second
<b>PSFP</b>	Per-Stream Filtering and Policing
<b>PTF</b>	Port to Forward

**TABLE 1-1: GENERAL TERMS (CONTINUED)**

Term	Description
<b>PTP</b>	Precision Time Protocol
<b>QoS</b>	Quality of Service
<b>QWORD</b>	64-bits
<b>RESERVED</b>	Refers to a reserved bit field or address. Unless otherwise noted, reserved bits must always be zero for write operations. Unless otherwise noted, values are not guaranteed when reading reserved bits. Unless otherwise noted, do not read or write to reserved addresses.
<b>RGMII</b>	Reduced Gigabit Media Independent Interface
<b>RMII</b>	Reduced Media Independent Interface
<b>RMON</b>	Remote Monitoring
<b>RTC</b>	Real Time Clock
<b>SA</b>	Source Address
<b>SCSR</b>	System Control and Status Registers
<b>SDU</b>	Service Data Unit
<b>SFD</b>	Start of Frame Delimiter - The 8-bit value indicating the end of the preamble of an Ethernet frame
<b>SNMP</b>	Simple Network Management Protocol
<b>SOF</b>	Start of Frame
<b>STC</b>	System Time Clock
<b>TA</b>	Turn-Around Time
<b>TAS</b>	Time Aware Scheduler
<b>TC</b>	Transparent Clock
<b>TCP</b>	Transport Control Protocol
<b>TMII</b>	Turbo Media Independent Interface
<b>UDP</b>	User Datagram Protocol - A connectionless protocol run on top of IP networks
<b>UTP</b>	Unshielded Twisted Pair
<b>VLAN</b>	Virtual Local Area Network
<b>WORD</b>	16-bits

## 1.2 Buffer Types

**TABLE 1-2: BUFFER TYPES**

Buffer Type	Description
VIS	Variable Schmitt-triggered input
VIS_VBAT	Variable Schmitt-triggered input in VBAT power domain
IPU	Input with internal pull-up (58 k $\Omega$ $\pm$ 30%)
VO8	Variable Output with 8 mA sink and 8 mA source
VO_VBAT	Variable Output in VBAT power domain
A	Analog
ICLK	Crystal oscillator input pin
OCLK	Crystal oscillator output pin
P	Power
OD	Open-drain output
RGMII	RGMII Output
PU	70k (typical) internal pull-up. Unless otherwise noted in the pin description, internal pull-ups are always enabled.  <b>Note:</b> Internal pull-up resistors prevent unconnected inputs from floating. Do not rely on internal resistors to drive signals external to the device. When connected to a load that must be pulled high, an external resistor must be added.

**Note:** All digital input pins have an internal pull-up enabled during power-up/pin reset.

## 1.3 Reference Documents

1. *IEEE 802.3<sup>TM</sup>-2015 IEEE Standard for Ethernet*,  
<http://standards.ieee.org/about/get/802/802.3.html>
2. *IEEE 802.3bw<sup>TM</sup>-2015 IEEE Standard for Ethernet Amendment 1*,  
<https://standards.ieee.org/findstds/standard/802.3bw-2015.html>
3. *RMII Specification Revision 1.2*,  
[http://ebook.pldworld.com/\\_eBook/-Telecommunications,Networks-/TCPIP/RMII/rmii\\_rev12.pdf](http://ebook.pldworld.com/_eBook/-Telecommunications,Networks-/TCPIP/RMII/rmii_rev12.pdf)
4. *Reduced Gigabit Media Independent Interface (RGMII) Specification Version 2.0*,  
[https://web.archive.org/web/20160303171328/http://www.hp.com/rnd/pdfs/RGMIIv2\\_0\\_final\\_hp.pdf](https://web.archive.org/web/20160303171328/http://www.hp.com/rnd/pdfs/RGMIIv2_0_final_hp.pdf)
5. *OPEN Alliance TC1 - Advanced diagnostics features for 100BASE-T1 automotive Ethernet PHYs Version 1.0*  
<http://www.opensig.org/about/specifications/>
6. *OPEN Alliance TC10 - Sleep/Wake-up Specification Version 2.0*  
<http://www.opensig.org/about/specifications/>

# LAN9371

## 2.0 INTRODUCTION

### 2.1 General Description

The Microchip LAN9371 is a scalable, compact and cost-effective, multi-Port AVB/TSN 100BASE-T1 Ethernet Switch based on the IEEE 802.3bw-2015 specification. The LAN9371 incorporates a layer-2+ managed high-performance Ethernet switch, three 100BASE-T1 physical layer transceivers (PHYs), and two MAC ports with individually configurable RGMII/MII/RMII interfaces for direct connection to a host processor/controller, another Ethernet switch, or an Ethernet PHY transceiver. An additional IEEE 802.3/802.3u compliant 100BASE-TX port is provided for applications where an integrated automotive OBD port is required. The LAN9371 is available in a Grade 2 Automotive (-40°C to +105°C) temperature range and is qualified to AEC-Q100 automotive use cases such as gateways, Automated Driver-Assistance Systems (ADAS), infotainment, telematics and in-vehicle networking.

The LAN9371 fully supports the IEEE family of Audio Video Bridging (AVB) standards, which provide high Quality of Service (QoS) for latency sensitive traffic streams over Ethernet. Hardware time-stamping and time-keeping features support IEEE 802.1AS (gPTP) and IEEE 1588v2 (PTP) time synchronization. All ports feature eight egress queues and an IEEE 802.1Qav credit based traffic shaper and time aware scheduler, as per the IEEE 802.1Qbv specification.

A host processor can access all LAN9371 registers for control over all PHY, MAC, and switch functions. Full register access is available via the integrated SMI and SPI interfaces, and by in-band management via any one of the data ports. PHY register access is provided by a MIIM interface. Flexible digital I/O voltage allows the MAC port to interface directly with a 1.8/2.5/3.3V host processor/controller/FPGA.

Additionally, a robust assortment of EtherGREEN™ energy efficiency features are provided, including Open Alliance TC10 sleep/wakeup partial networking, non-TC10 link partner energy detect wake-up, and ultra-deep-sleep power down.

Table 2-1 provides a summary of the feature differences between members of the LAN937x device family:

**TABLE 2-1: LAN937X FAMILY FEATURE MATRIX**


Part Number	Package	# of Integrated 100BASE-T1 PHYs	100BASE-TX Support	SGMII Support	RGMII/RMII/MII Ports	Full AVB Support	Time Sensitive Networking Support	OPEN Alliance TC10 Sleep/Wakeup Energy Efficiency	Cascade Mode Support	AEC-Q100 Qualification	Grade 2 Automotive Temp. (-40° to 105°C)
LAN9370	64-VQFN	4			1	X	X	X	X	X	X
LAN9371	128-TQFP	3	X		2	X	X	X	X	X	X
LAN9372	128-TQFP	5	X		2	X	X	X	X	X	X
LAN9373	128-TQFP	5		X	2	X	X	X	X	X	X
LAN9374	128-TQFP	6			2	X	X	X	X	X	X

**Note:** All LAN937x devices share a common software driver. All 128-TQFP LAN937x devices are pin compatible.



An internal block diagram of the LAN9371 is shown in [Figure 2-1](#).

**FIGURE 2-1: INTERNAL BLOCK DIAGRAM**

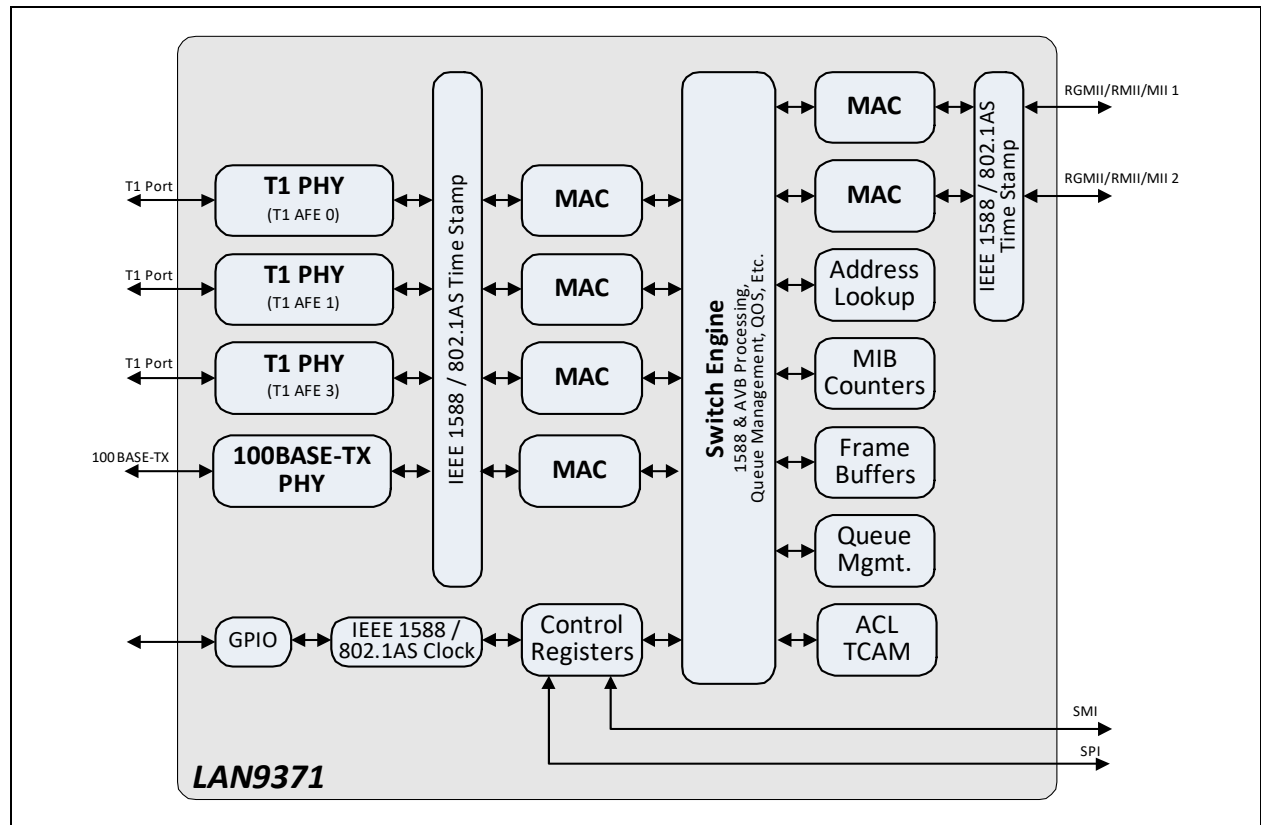


# LAN9371

## 3.0 PIN DESCRIPTIONS AND CONFIGURATION

### 3.1 Pin Assignments

FIGURE 3-1: LAN9371 PIN ASSIGNMENTS (TOP VIEW)

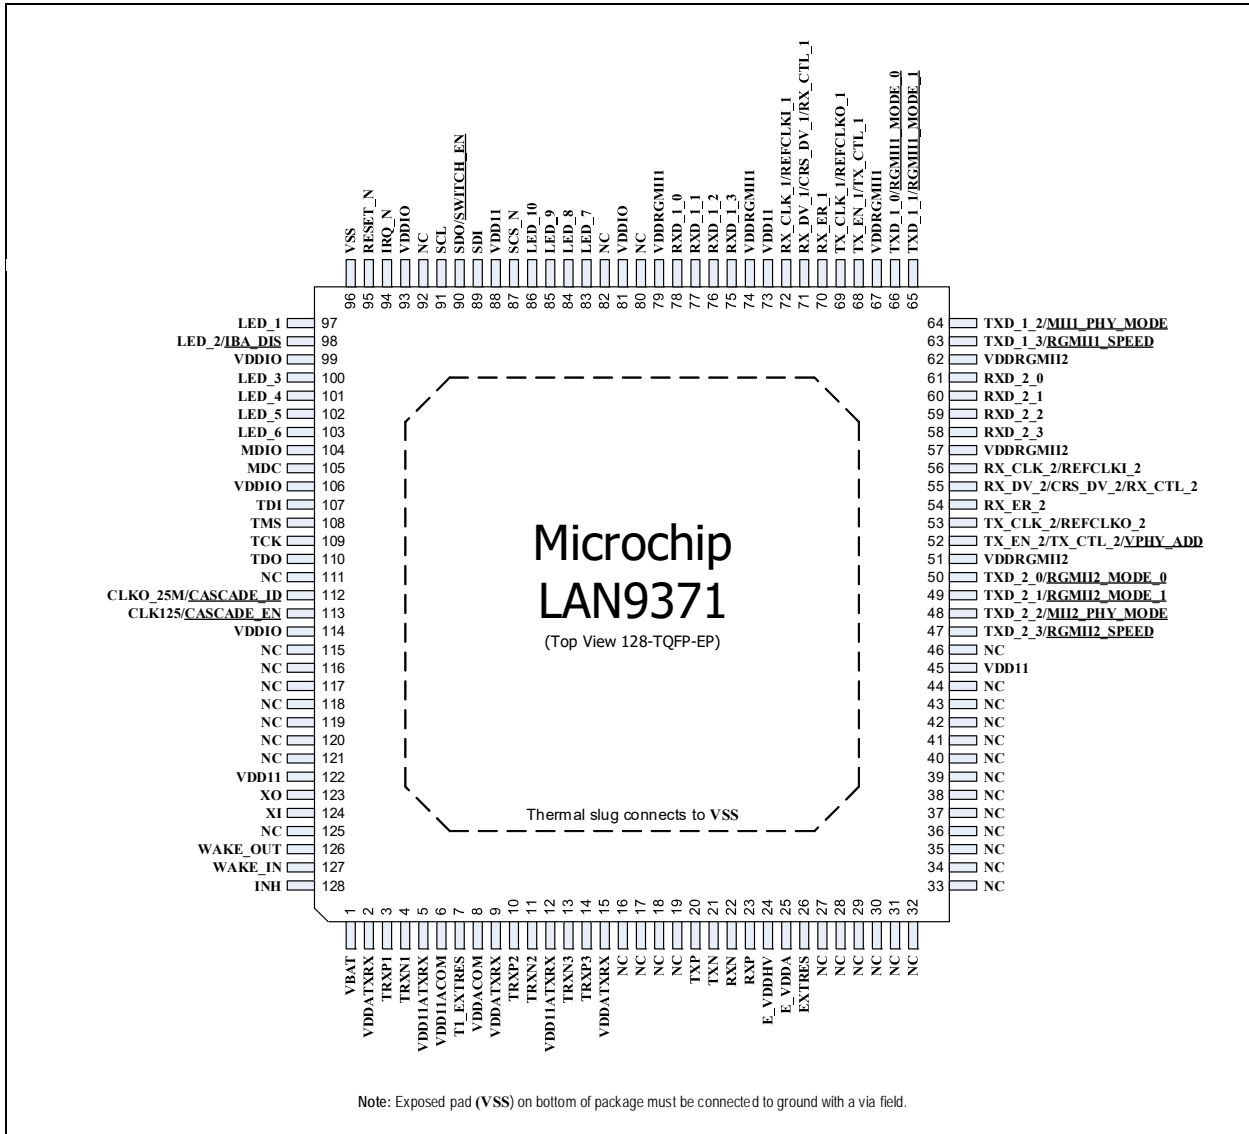

**TABLE 3-1: LAN9371 PIN ASSIGNMENTS**

Pin	Pin Name	Pin	Pin Name	Pin	Pin Name	Pin	Pin Name
1	VBAT	33	NC	65	TXD_1_1/ <u>RGMI1_MODE_1</u>	97	LED_1
2	VDDATXRX	34	NC	66	TXD_1_0/ <u>RGMI1_MODE_0</u>	98	LED_2/ <u>IBA_DIS</u>
3	TRXP1	35	NC	67	VDDRGMI1	99	VDDIO
4	TRXN1	36	NC	68	TX_EN_1/TX_CTL_1	100	LED_3
5	VDD11ATXRX	37	NC	69	TX_CLK_1/ REFCLKO_1	101	LED_4
6	VDD11ACOM	38	NC	70	RX_ER_1	102	LED_5
7	T1_EXTRES	39	NC	71	RX_DV_1/CRS_DV_1/ RX_CTL_1	103	LED_6
8	VDDACOM	40	NC	72	RXCLK_1/REFCLKI_1	104	MDIO
9	VDDATXRX	41	NC	73	VDD11	105	MDC
10	TRXP2	42	NC	74	VDDRGMI1	106	VDDIO
11	TRXN2	43	NC	75	RXD_1_3	107	TDI
12	VDD11ATXRX	44	NC	76	RXD_1_2	108	TMS
13	TRXN3	45	VDD11	77	RXD_1_1	109	TCK
14	TRXP3	46	NC	78	RXD_1_0	110	TDO
15	VDDATXRX	47	TXD_2_3/ <u>RGMI2_SPEED</u>	79	VDDRGMI1	111	NC
16	NC	48	TXD_2_2/ <u>MI12_PHY_MODE</u>	80	NC	112	CLKO_25M/ <u>CASCADE_ID</u>
17	NC	49	TXD_2_1/ <u>RGMI2_MODE_1</u>	81	VDDIO	113	CLK125/ <u>CASCADE_EN</u>
18	NC	50	TXD_2_0/ <u>RGMI2_MODE_0</u>	82	NC	114	VDDIO
19	NC	51	VDDRGMI2	83	LED_7	115	NC
20	TXP	52	TX_EN_2/TX_CTL_2/ <u>VPHY_ADD</u>	84	LED_8	116	NC
21	TXN	53	TX_CLK_2/ REFCLKO_2	85	LED_9	117	NC
22	RXN	54	RX_ER_2	86	LED_10	118	NC
23	RXP	55	RX_DV_2/CRS_DV_2/ RX_CTL_2	87	SCS_N	119	NC
24	E_VDDHV	56	RX_CLK_2/REFCLKI_2	88	VDD11	120	NC
25	E_VDDA	57	VDDRGMI2	89	SDI	121	NC
26	EXTRES	58	RXD_2_3	90	SDO/ <u>SWITCH_EN</u>	122	VDD11
27	NC	59	RXD_2_2	91	SCL	123	XO
28	NC	60	RXD_2_1	92	NC	124	XI
29	NC	61	RXD_2_0	93	VDDIO	125	NC
30	NC	62	VDDRGMI2	94	IRQ_N	126	WAKE_OUT
31	NC	63	TXD_1_3/ <u>RGMI1_SPEED</u>	95	RESET_N	127	WAKE_IN
32	NC	64	TXD_1_2/ <u>MI11_PHY_MODE</u>	96	VSS	128	INH
Exposed Pad Must be Connected to VSS							

# LAN9371

## 3.2 Pin Descriptions

This section contains descriptions of the various LAN9371 pins. Buffer type definitions are detailed in [Section 1.2, "Buffer Types"](#).

The “\_N” symbol in the signal name indicates that the active, or asserted, state occurs when the signal is at a low voltage level. For example, **RESET\_N** indicates that the reset signal is active low. When “\_N” is not present after the signal name, the signal is asserted when at the high voltage level.

Configuration straps allow various features of the device to be automatically configured to user defined values. Configuration straps are identified by an underlined symbol name and are latched upon Power-On Reset (POR) and pin reset (**RESET\_N**). Configuration straps include internal pull-up/pull-down resistors in order to prevent the signal from floating when unconnected.

**Note:** Signals that function as configuration straps must be augmented with an external pull-up or pull-down resistor when connected to a load to ensure they reach the required voltage level prior to latching.

**TABLE 3-2: PIN DESCRIPTIONS**

Name	Symbol	Buffer Type	Description
<b>100BASE-T1 Ethernet PHY Ports</b>			
Port 3-1 100BASE-T1 PHY TX/RX Positive	<b>TRXP[3:1]</b>	A	Port 3-1 100BASE-T1 PHY transmit/receive positive.
Port 3-1 100BASE-T1 PHY TX/RX Negative	<b>TRXN[3:1]</b>	A	Port 3-1 100BASE-T1 PHY transmit/receive negative.
100BASE-T1 Reference Resistor	<b>T1_EXTRES</b>	A	Reference resistor connection pin for the T1 PHY common block. For proper operation, this pin must be connected to VSS through a 6.49kΩ 0.1% resistor.
<b>100BASE-TX Ethernet PHY Port</b>			
100BASE-TX Ethernet Receive Data Positive	<b>RXP</b>	A	100BASE-TX Ethernet Receive Data Positive.
100BASE-TX Ethernet Receive Data Negative	<b>RXN</b>	A	100BASE-TX Ethernet Receive Data Negative.
100BASE-TX Ethernet Transmit Data Positive	<b>TXP</b>	A	100BASE-TX Ethernet Transmit Data Positive.
100BASE-TX Ethernet Transmit Data Negative	<b>TXN</b>	A	100BASE-TX Ethernet Transmit Data Negative.

**TABLE 3-2: PIN DESCRIPTIONS (CONTINUED)**

Name	Symbol	Buffer Type	Description
100BASE-TX Reference Resistor	EXTRES	A	Reference resistor connection pin for 100BASE-TX PHY common block. For proper operation, this pin must be connected to VSS through a 6.49kΩ 0.1% resistor.
<b>RGMII/RMII/MII Ports</b>			
RGMII/RMII/MII 2-1 Transmit Data 3	TXD_[2:1]_3	RGMII	<p><b>MII/RGMII Modes:</b> Transmit Data bus bit 3 output.</p> <p><b>RMII Mode:</b> Not used.</p> <p><b>Note:</b> These pins also provide configuration strap functions during hardware/software resets.</p>
RGMII/RMII/MII 2-1 Transmit Data 2	TXD_[2:1]_2	RGMII	<p><b>MII/RGMII Modes:</b> Transmit Data bus bit 2 output.</p> <p><b>RMII Mode:</b> Not used.</p> <p><b>Note:</b> These pins also provide configuration strap functions during a hardware reset.</p>
RGMII/RMII/MII 2-1 Transmit Data 1	TXD_[2:1]_1	RGMII	<p><b>MII/RMII/RGMII Modes:</b> Transmit Data bus bit 1 output.</p> <p><b>Note:</b> These pins also provide configuration strap functions during a hardware reset.</p>
RGMII/RMII/MII 2-1 Transmit Data 0	TXD_[2:1]_0	RGMII	<p><b>MII/RMII/RGMII Modes:</b> Transmit Data bus bit 0 output.</p> <p><b>Note:</b> These pins also provide configuration strap functions during a hardware reset.</p>
RGMII/RMII/MII 2-1 Transmit/Reference Clock	TX_CLK_[2:1]/REFCLKO_[2:1]	RGMII	<p><b>MII Mode:</b> TX_CLK_[2:1] is the 25/2.5MHz Transmit Clock. In PHY mode this pin is an output, in MAC mode it is an input.</p> <p><b>RMII Mode:</b> REFCLKO_[2:1] is the 50MHz Reference Clock output when in RMII Clock mode. This pin is unused when in RMII Normal mode.</p> <p><b>RGMII Mode:</b> TX_CLK_[2:1] is the 125/25/2.5MHz Transmit Clock output.</p> <p><b>Note:</b> The TX_CLK_2 pin also provides configuration strap functions during a hardware reset.</p>
RGMII/RMII/MII 2-1 Transmit Enable/Control	TX_EN_[2:1]/TX_CTL_[2:1]	RGMII	<p><b>MII/RMII Modes:</b> TX_EN_[2:1] is the Transmit Enable output.</p> <p><b>RGMII Mode:</b> TX_CTL_[2:1] is the Transmit Control output.</p> <p><b>Note:</b> The TX_EN_2 pin also provides configuration strap functions during a hardware reset.</p>
RGMII/RMII/MII 2-1 Receive Data 3	RXD_[2:1]_3	RGMII	<p><b>MII/RGMII Modes:</b> Receive Data bus bit 3 input.</p> <p><b>RMII Mode:</b> Not used. Do not connect this pin in this mode of operation.</p>

**TABLE 3-2: PIN DESCRIPTIONS (CONTINUED)**

Name	Symbol	Buffer Type	Description
RGMII/RMII/MII 2-1 Receive Data 2	RXD_[2:1]_2	RGMII	<b>MII/RGMII Modes:</b> Receive Data bus bit 2 input.  <b>RMII Mode:</b> Not used. Do not connect this pin in this mode of operation.
RGMII/RMII/MII 2-1 Receive Data 1	RXD_[2:1]_1	RGMII	<b>MII/RMII/RGMII Modes:</b> Receive Data bus bit 1 input.
RGMII/RMII/MII 2-1 Receive Data 0	RXD_[2:1]_0	RGMII	<b>MII/RMII/RGMII Modes:</b> Receive Data bus bit 0 input.
RGMII/RMII/MII 2-1 Receive Clock	RX_CLK_[2:1]/ REFCLKI_[2:1]	RGMII	<b>MII Mode:</b> RX_CLK_[2:1] is the 25/2.5MHz Receive Clock. In PHY mode this pin is an output, in MAC mode it is an input.  <b>RMII Mode:</b> REFCLKI_[2:1] is the 50MHz Reference Clock input when in RMII Normal mode. This pin is unused when in RMII Clock mode.  <b>RGMII Mode:</b> RX_CLK_[2:1] is the 125/25/2.5MHz Receive Clock output.
RGMII/RMII/MII 2-1 Receive Data Valid / Carrier Sense / Control	RX_DV_[2:1]/ CRS_DV_[2:1]/ RX_CTL_[2:1]	RGMII	<b>MII Mode:</b> RX_DV_[2:1] is the Receive Data Valid / Carrier Sense input.  <b>RMII Mode:</b> CRS_DV_[2:1] is the Carrier Sense / Receive Data Valid input.  <b>RGMII Mode:</b> RX_CTL_[2:1] is the Receive Control input.
RGMII/RMII/MII 2-1 Receive Error	RX_ER_[2:1]	RGMII	<b>MII/RMII Modes:</b> Receive Error input.  <b>RGMII Mode:</b> Not used. Do not connect this pin in this mode of operation.
RGMII/RMII/MII 2-1 125 MHz Reference Clock Output	CLK125	RGMII	125 MHz RGMII reference clock output to SoC MAC.  <b>Note:</b> This pin also provides configuration strap functions during a hardware reset.
<b>SPI Pins</b>			
SPI Clock	SCL	VIS	SPI clock.  The maximum supported SPI Clock frequency is 50 MHz.
SPI Chip Select	SCS_N	VIS	Active-low SPI chip select input.

**TABLE 3-2: PIN DESCRIPTIONS (CONTINUED)**

Name	Symbol	Buffer Type	Description
SPI Data Out	<b>SDO</b>	VO8	SPI output data. <b>Note:</b> This pin also provides configuration strap functions during a hardware reset.
SPI Data In	<b>SDI</b>	VIS	SPI input data.
<b>MDIO Pins</b>			
SMI Data Input/Output	<b>MDIO</b>	VIS/VO8	Serial Management Interface data input/output.
SMI Clock	<b>MDC</b>	VIS	Serial Management Interface clock.
<b>LED Pins</b>			
LED Indicator 1	<b>LED_1</b>	VIS/VO8	LED Indicator 1.  This pin may also function as a programmable input/output.  This signal can also be used as an input or output for use by the IEEE 1588 event trigger or time -stamp capture units. It will be synchronized to the internal IEEE 1588 clock.
LED Indicator 2	<b>LED_2</b>	VIS/VO8	LED Indicator 2.  This pin may also function as a programmable input/output. <b>Note:</b> This pin also provides configuration strap functions during a hardware reset.
LED Indicator 3	<b>LED_3</b>	VIS/VO8	LED Indicator 3.  This pin may also function as a programmable input/output.
LED Indicator 4	<b>LED_4</b>	VIS/VO8	LED Indicator 4.  This pin may also function as a programmable input/output.
LED Indicator 5	<b>LED_5</b>	VIS/VO8	LED Indicator 5.  This pin may also function as a programmable input/output.
LED Indicator 6	<b>LED_6</b>	VIS/VO8	LED Indicator 6.  This pin may also function as a programmable input/output.

**TABLE 3-2: PIN DESCRIPTIONS (CONTINUED)**

Name	Symbol	Buffer Type	Description
LED Indicator 7	<b>LED_7</b>	VIS/VO8	LED Indicator 7.  This pin may also function as a programmable input/output.
LED Indicator 8	<b>LED_8</b>	VIS/VO8	LED Indicator 8.  This pin may also function as a programmable input/output.
LED Indicator 9	<b>LED_9</b>	VIS/VO8	LED Indicator 9.  This pin may also function as a programmable input/output.
LED Indicator 10	<b>LED_10</b>	VIS/VO8	LED Indicator 10. This pin may also function as a programmable input/output.
<b>JTAG Pins</b>			
JTAG Test Data Input	<b>TDI</b>	VIS	JTAG (IEEE 1149.1) data input. <b>Note:</b> When not used, tie this pin to <b>VDDIO</b> .
JTAG Test Data Output	<b>TDO</b>	VO8	JTAG (IEEE 1149.1) test data output.
JTAG Test Clock	<b>TCK</b>	VIS	JTAG (IEEE 1149.1) test clock. <b>Note:</b> When not used, tie this pin to <b>VSS</b> .
JTAG Test Mode Select	<b>TMS</b>	VIS	JTAG (IEEE 1149.1) test mode select. <b>Note:</b> When not used, tie this pin to <b>VSS</b> .
<b>Miscellaneous Pins</b>			
System Reset	<b>RESET_N</b>	VIS	System reset. This pin is active low. <b>Note:</b> When not used, this pin should be pulled-up to <b>VDDIO</b> .
Wake Input	<b>WAKE_IN</b>	VIS_VBAT	Wakeup Input. Asserted to move the part out of sleep. This pin implements the optional wake input described in the OABR TC10 specification. <b>Note:</b> This pin operates of off <b>VBAT</b> domain.
Wake Output	<b>WAKE_OUT</b>	VO_VBAT	Wake Output. Asserted when the part moves out of sleep. This pin implements the optional wake output described in the OABR TC10 specification. <b>Note:</b> This pin operates of off <b>VBAT</b> domain.



**TABLE 3-2: PIN DESCRIPTIONS (CONTINUED)**

Name	Symbol	Buffer Type	Description
Inhibit	<b>INH</b>	VO_VBAT	Inhibit. Used to switch on/off the main external power supply unit. This pin can be configured as an open source or open drain.  <b>Note:</b> When configured as open source, an external pull-down is required. When configured as open drain, this pin should be connected to VBAT via an external pull-up.  <b>Note:</b> RESET_N assertion does not affect the state of this pin.
Interrupt	<b>IRQ_N</b>	VOD	Active-low, open drain device interrupt.  <b>Note:</b> When unused, leave this pin unconnected.
25 MHz Reference Clock	<b>CLKO_25M/ CASCADE_ID</b>	VO8	25 MHz reference clock output.
Crystal Clock / Oscillator Input	<b>XI</b>	ICLK	25MHz Crystal clock / oscillator input. When using a crystal, this input is connected to one lead of the crystal. When using an oscillator, this pin is the input from the oscillator.
Crystal Clock Output	<b>XO</b>	OCLK	25MHz Crystal clock output. When using a crystal, this output is connected to one lead of the crystal. When using an oscillator, this pin is left unconnected.
No Connect	<b>NC</b>	-	No Connect. For proper operation, NC pins must be left unconnected.
<b>I/O Power pins, Core Power Pins, and Ground Pins</b>			
+1.8 - 3.3V I/O Power Supply Input	<b>VDDIO</b>	P	+1.8 - 3.3V variable supply for I/Os.
+1.1V Digital Core Power Supply Input	<b>VDDI1</b>	P	+1.1V digital core power.
+1.1V T1 Common Block Power Supply	<b>VDDI1ACOM</b>	P	+1.1V analog power supply for T1 common block.
+1.1V TX/RX Analog Power Supply	<b>VDDI1ATXRX</b>	P	+1.1V analog power supply for T1 PHY.
+2.5 - 3.3V TX/RX Analog Power Supply	<b>VDDATXRX</b>	P	+2.5 - 3.3V analog power supply for T1 PHY.


**TABLE 3-2: PIN DESCRIPTIONS (CONTINUED)**

Name	Symbol	Buffer Type	Description
+2.5 - 3.3V T1 Common Block Power Supply	<b>VDDACOM</b>	P	+2.5 - 3.3V analog power supply for T1 common block.
+2.5 - 3.3V VBAT Power Supply	<b>VBAT</b>	P	+2.5 - 3.3V power supply for the VBAT domain.
+1.8 - 3.3V RGMII/RMII/MII 1 Analog Power Supply	<b>VDDRGMI1</b>	P	+1.8 - 3.3V variable power supply for RGMII/MII/RMII 1 interface.
+1.8 - 3.3V RGMII/RMII/MII 2 Analog Power Supply	<b>VDDRGMI2</b>	P	+1.8V - 3.3V variable power supply for RGMII/MII/RMII 2 interface.
+2.5 - 3.3V 100BASE-TX PHY Analog Power	<b>E_VDDHV</b>	P	+2.5 - 3.3V 100BASE-TX PHY analog power supply for RX and TX.
+1.1V 100BASE-TX PHY PLL Power	<b>E_VDDA</b>	P	+1.1V 100BASE-TX PHY PLL digital power supply.
Ground	<b>VSS</b>	P	Ground pad.

## 4.0 PACKAGE INFORMATION

### 4.1 Package Marking Information

128-TQFP-EP

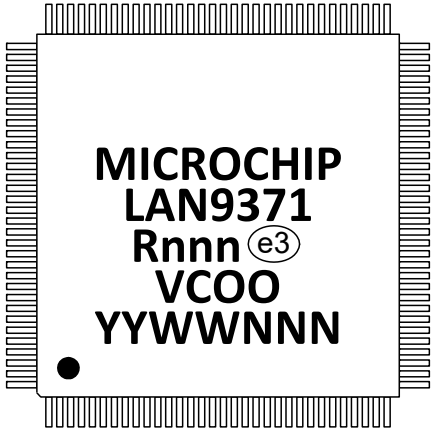

**Legend:**

R	Product revision
nnn	Internal code
e3	Pb-free JEDEC® designator for Matte Tin (Sn)
V	Plant assembly
COO	Country of origin
YY	Year code (last two digits of calendar year)
WW	Week code (week of January 1 is week '01')
NNN	Alphanumeric traceability code

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.


\* Standard device marking consists of Microchip part number, year code, week code and traceability code. For device marking beyond this, certain price adders apply. Please check with your Microchip Sales Office. For QTP devices, any special marking adders are included in QTP price.




**FIGURE 4-2: PACKAGE (DIMENSIONS)**

**128-Lead Thin Quad Flat Pack (Z2X) - 14x14x1.0 mm Body [TQFP]  
With 9x9 mm Grooved Exposed Pad**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

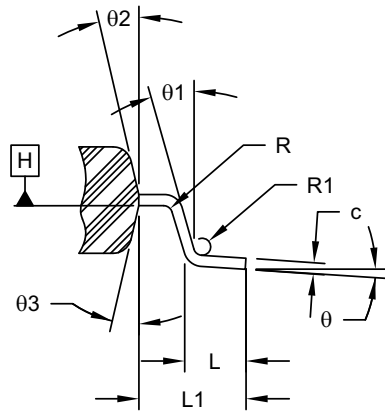

**SECTION A-A**

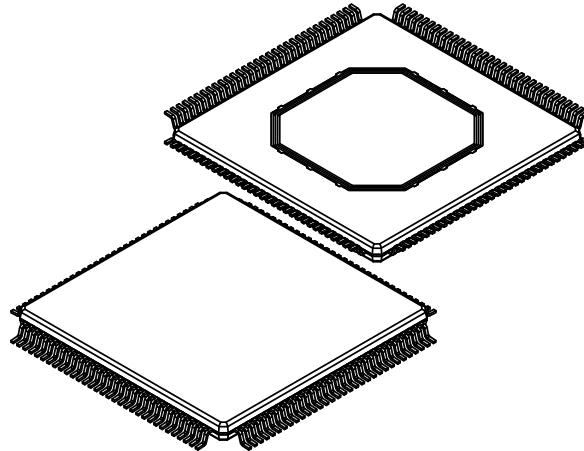

		Units	MILLIMETERS		
Dimension Limits			MIN	NOM	MAX
Number of Leads	N		128		
Lead Pitch	e		0.40 BSC		
Overall Height	A		-	-	1.20
Standoff	A1		0.05	0.10	0.15
Molded Package Thickness	A2		0.95	1.00	1.05
Overall Length	D		16.00 BSC		
Molded Package Length	D1		14.00 BSC		
Molded Package Length	D2		8.90	9.00	9.10
Overall Width	E		16.00 BSC		
Molded Package Width	E1		14.00 BSC		
Molded Package Width	E2		8.90	9.00	9.10
Lead Width	b		0.13	0.16	0.23
Lead Thickness	c		0.09	-	0.20
Foot Length	L		0.45	0.60	0.75
Footprint	L1		1.00 REF		
Foot Angle	θ		0°	-	7°
Lead Angle	θ1		0°	-	-
Mold Draft Angle Top	θ2		11°	12°	13°
Mold Draft Angle Bottom	θ3		11°	12°	13°
Lead Bend Radius	R		0.08	-	-
Lead Bend Radius	R1		0.08	-	0.20

**Notes:**


- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.  
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-181 Rev A Sheet 2 of 2

**FIGURE 4-3: PACKAGE (LAND PATTERN)**

**128-Lead Thin Quad Flat Pack (ZMX) - 14x14x1.0 mm Body [TQFP]  
With 9x9 mm Grooved Exposed Pad**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

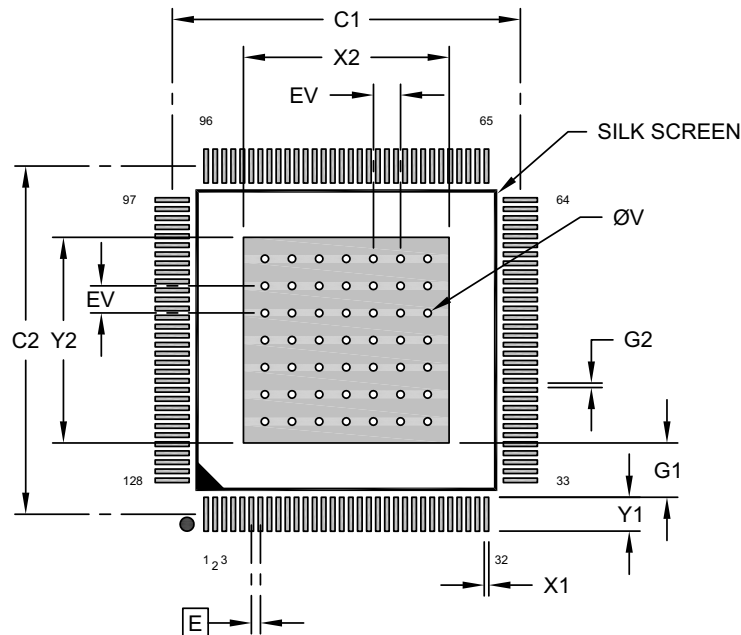

**RECOMMENDED LAND PATTERN**

Units		MILLIMETERS		
Dimension Limits		MIN	NOM	MAX
Contact Pitch	E	0.40 BSC		
Optional Center Pad Width	X2			9.10
Optional Center Pad Length	Y2			9.10
Contact Pad Spacing	C1		15.40	
Contact Pad Spacing	C2		15.40	
Contact Pad Width (X128)	X1			0.20
Contact Pad Length (X128)	Y1			1.50
Contact Pad to Center Pad (X128)	G1	2.40		
Contact Pad to Contact Pad (X124)	G2	0.20		
Thermal Via Diameter	V		0.33	
Thermal Via Pitch	EV		1.20	

**Notes:**

- Dimensioning and tolerancing per ASME Y14.5M  
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2502 Rev A

---

## APPENDIX A: PRODUCT BRIEF REVISION HISTORY

TABLE A-1: REVISION HISTORY

Revision	Section/Figure/Entry	Correction
DS00002818B (04-06-21)	Public Release	
DS00002818A (10-12-18)	Initial Document Release	

## THE MICROCHIP WEB SITE

Microchip provides online support via our WWW site at [www.microchip.com](http://www.microchip.com). This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at [www.microchip.com](http://www.microchip.com). Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the web site at: <http://www.microchip.com/support>**



## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

<u>PART NO.</u>	<u>[X]<sup>(1)</sup></u>	-	<u>X</u>	/	<u>XXX</u>	<u>XXX</u>
Device	Tape & Reel Option		Temp. Range		Package	Automotive Code
<b>Device:</b> LAN9371 = 6-Port Switch (2 RGMII/MII/RMII, 1 100BASE-TX)						
<b>Tape and Reel Option:</b> Blank = Standard packaging (tray) T = Tape and Reel ( <a href="#">Note 1</a> )						
<b>Temperature Range:</b> -V = -40°C to +105°C (Grade 2 Automotive)						
<b>Package:</b> ZMX = 128-pin TQFP-EP						
<b>Automotive Code:</b> Vxx = 3 character code with "V" prefix, specifying automotive product						
<b>Examples:</b> a) LAN9371-V/ZMXVAO Standard packaging, Grade 2 Automotive temperature, 128-pin TQFP-EP package b) LAN9371T-V/ZMXVAO Tape and reel, Grade 2 Automotive temperature, 128-pin TQFP-EP package						
<b>Note 1:</b> Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.						

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

## Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maxStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Parallelism, Inter-Chip Connectivity, JitterBlocker, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2019-2021, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 9781522478997

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).



---

## Worldwide Sales and Service

---

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820