


PIM with Trench Field-Stop IGBT, Emitter Controlled Diode and NTC

Features

- Low Switching Losses
- 1200V Trench Field-Stop IGBT
- Low $V_{CE(sat)}$ with Positive Temperature Coefficient

Applications

- Auxiliary Inverters
- Air Conditioning
- Motor Drives
- Uninterruptive Power Supply (UPS)

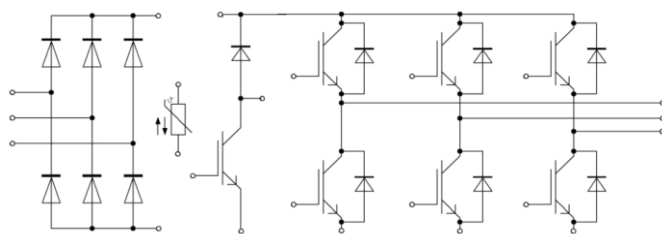

IGBT - Inverter

Maximum Rated Values

Symbol	Description	Conditions	Values	Unit
V_{CES}	Collector-Emitter Voltage	$T_{vj}=25^{\circ}\text{C}$	1200	V
V_{GES}	Gate-Emitter Voltage	$T_{vj}=25^{\circ}\text{C}$	± 20	V
I_C	Continuous DC Collector Current	$T_C=25^{\circ}\text{C}$	30	A
	Continuous DC Collector Current	$T_C=100^{\circ}\text{C}$	15	A
I_{CRM}	Repetitive Peak Collector Current	$t_p=1\text{ms}$	30	A
P_{tot}	Total Power Dissipation	$T_C=25^{\circ}\text{C}$, $T_{vj\text{ max}}=175^{\circ}\text{C}$	130	W

Characteristic Values

Symbol	Description	Conditions	Values			Unit
			Min.	Typ.	Max.	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE}=15V, I_C=15A, T_{vj}=25^{\circ}C$	---	1.90	2.25	V
		$V_{GE}=15V, I_C=15A, T_{vj}=125^{\circ}C$	---	2.40	--	V
$V_{GE(th)}$	Gate Threshold Voltage	$V_{GE}=V_{CE}, I_C=480\mu A$	5.2	5.8	6.4	V
I_{CES}	Collector-Emitter Leakage Current	$V_{CE}=1200V, V_{GE}=0V$	---	---	1	mA
I_{GES}	Gate Leakage Current	$V_{GE}=\pm 20V, V_{CE}=0V$	---	---	± 400	nA
Q_G	Total Gate Charge	$V_{CC}=960V, V_{GE}=15V, I_C=15A$	---	68	---	nC
C_{ies}	Input Capacitance	$V_{CE}=25V, V_{GE}=0V, f=1MHz$	---	903	---	pF
C_{res}	Reverse Transfer Capacitance		---	48	---	pF
$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600V$ $V_{GE}=\pm 15V$ $I_C=15A$ $R_G=39\Omega$ Inductive Load $T_{vj}=25^{\circ}C$	---	112	---	ns
t_r	Turn-on Rise Time		---	54	---	ns
$t_{d(off)}$	Turn-off Delay Time		---	112	---	ns
t_f	Turn-off Fall Time		---	284	---	ns
E_{on}	Turn-on Switching Loss		---	5.18	---	mJ
E_{off}	Turn-off Switching Loss		---	1.01	---	mJ
$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600V$ $V_{GE}=\pm 15V$ $I_C=15A$ $R_G=39\Omega$ Inductive Load $T_{vj}=125^{\circ}C$	---	92	---	ns
t_r	Turn-on Rise Time		---	52	---	ns
$t_{d(off)}$	Turn-off Delay Time		---	198	---	ns
t_f	Turn-off Fall Time		---	376	---	ns
E_{on}	Turn-on Switching Loss		---	7.93	---	mJ
E_{off}	Turn-off Switching Loss		---	1.58	---	mJ
I_{SC}	SC data	$V_{GE}\leq 15V, V_{CC}=600V$ $t_p\leq 10\mu s, T_{vj}=25^{\circ}C$	---	37.26	---	A
R_{thJC}	Thermal Resistance, Junction to Case	per IGBT	---	1.00	1.15	K/W
R_{thCH}	Thermal Resistance, Case to Heatsink	per IGBT $\lambda_{Paste}=1W/(m\cdot k), \lambda_{Grease}=1W/(m\cdot k)$	---	1.05	---	K/W
$T_{VJ OP}$	Virtual Junction Temperature	under Switching	-40	---	150	$^{\circ}C$

Diode - Inverter

Maximum Rated Values

Symbol	Description	Conditions	Values	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	$T_{vj}=25^{\circ}C$	1200	V
I_F	Gate-Emitter Voltage		15	A
I_{FRM}	Repetitive Peak Collector Current	$t_p=1ms$	30	A

Characteristic Values

Symbol	Description	Conditions	Values			Unit
			Min.	Typ.	Max.	
V_F	Forward Voltage	$I_F=15A, V_{GE}=0V, T_{vj}=25^{\circ}C$	---	2.0	2.4	V
		$I_F=15A, V_{GE}=0V, T_{vj}=125^{\circ}C$	---	1.6	---	V
I_{RM}	Peak Reverse Recovery Current	$I_F=15A, di/dt=250A/us$ $V_R=600V, V_{GE}=-15V$ $T_{vj}=25^{\circ}C$	---	10.67	---	A
Q_r	Recovered Charge		---	1.05	---	uC
E_{rec}	Reverse Recovery Energy		---	0.27	---	mJ
I_{RM}	Peak Reverse Recovery Current	$I_F=15A, di/dt=250A/us$ $V_R=600V, V_{GE}=-15V$ $T_{vj}=125^{\circ}C$	---	14.31	---	A
Q_r	Recovered Charge		---	2.95	---	uC
E_{rec}	Reverse Recovery Energy		---	0.59	---	mJ
R_{thJC}	Thermal Resistance, Junction to Case	per Diode	---	1.75	2	K/W
R_{thCH}	Thermal Resistance, Case to Heatsink	per IGBT $\lambda_{Paste}=1W/(m \cdot k), \lambda_{Grease}=1W/(m \cdot k)$	---	1.35	---	K/W
$T_{VJ OP}$	Virtual Junction Temperature	under Switching	-40	---	150	$^{\circ}C$

Diode - Rectifier

Maximum Rated Values

Symbol	Description	Conditions	Values	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	$T_{vj}=25^{\circ}C$	1600	V
$I_F (AV)$	Average Output Current	$T_{vj}=25^{\circ}C$	16	A
I_{FSM}	Surge Forward Current	$t_p=10ms, \sin 180^{\circ}, T_j=25^{\circ}C$	160	A
I^2t	I^2t Value	$t_p=10ms, \sin 180^{\circ}, T_j=25^{\circ}C$	128	A^2s

Characteristic Values

Symbol	Description	Conditions	Values			Unit
			Min.	Typ.	Max.	
V_F	Forward Voltage	$I_F=15A, V_{GE}=0V, T_{vj}=25^{\circ}C$	---	1.0	1.2	V
I_R	Recovery Current	$V_R=1600V$	---	---	1.0	mA
R_{thJC}	Thermal Resistance, Junction to Case	per Diode	---	1.25	1.38	K/W
R_{thCH}	Thermal Resistance, Case to Heatsink	per Diode $\lambda_{Paste}=1W/(m \cdot k), \lambda_{Grease}=1W/(m \cdot k)$	---	1.18	---	K/W
$T_{VJ OP}$	Virtual Junction Temperature	under Switching	-40	---	150	$^{\circ}C$

IGBT – Brake

Maximum Rated Values

Symbol	Description	Conditions	Values	Unit
V_{CES}	Collector-Emitter Voltage	$T_{vj}=25^{\circ}\text{C}$	1200	V
V_{GES}	Gate-Emitter Voltage	$T_{vj}=25^{\circ}\text{C}$	± 20	V
I_C	Continuous DC Collector Current	$T_C=25^{\circ}\text{C}$	30	A
	Continuous DC Collector Current	$T_C=100^{\circ}\text{C}$	15	A
I_{CRM}	Repetitive Peak Collector Current	$t_p=1\text{ms}$	30	A
P_{tot}	Total Power Dissipation	$T_C=25^{\circ}\text{C}$, $T_{vj\text{ max}}=175^{\circ}\text{C}$	130	W

Characteristic Values

Symbol	Description	Conditions	Values			Unit
			Min.	Typ.	Max.	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE}=15\text{V}$, $I_C=15\text{A}$, $T_{vj}=25^{\circ}\text{C}$	---	1.90	2.25	V
		$V_{GE}=15\text{V}$, $I_C=15\text{A}$, $T_{vj}=125^{\circ}\text{C}$	---	2.40	--	V
$V_{GE(th)}$	Gate Threshold Voltage	$V_{GE}=V_{CE}$, $I_C=480\mu\text{A}$	5.2	5.8	6.4	V
I_{CES}	Collector-Emitter Leakage Current	$V_{CE}=1200\text{V}$, $V_{GE}=0\text{V}$	---	---	1	mA
I_{GES}	Gate Leakage Current	$V_{GE}=\pm 20\text{V}$, $V_{CE}=0\text{V}$	---	---	± 400	nA
Q_G	Total Gate Charge	$V_{CC}=960\text{V}$, $V_{GE}=15\text{V}$, $I_C=15\text{A}$	---	68	---	nC
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}$, $V_{GE}=0\text{V}$, $f=1\text{MHz}$	---	903	---	pF
C_{res}	Reverse Transfer Capacitance		---	48	---	pF
$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600\text{V}$ $V_{GE}=\pm 15\text{V}$ $I_C=15\text{A}$ $R_G=39\Omega$ Inductive Load $T_{vj}=25^{\circ}\text{C}$	---	112	---	ns
t_r	Turn-on Rise Time		---	54	---	ns
$t_{d(off)}$	Turn-off Delay Time		---	112	---	ns
t_f	Turn-off Fall Time		---	284	---	ns
E_{on}	Turn-on Switching Loss		---	5.18	---	mJ
E_{off}	Turn-off Switching Loss		---	1.01	---	mJ
$t_{d(on)}$	Turn-on Delay Time		---	92	---	ns
t_r	Turn-on Rise Time		---	52	---	ns
$t_{d(off)}$	Turn-off Delay Time	$V_{CC}=600\text{V}$ $V_{GE}=\pm 15\text{V}$ $I_C=15\text{A}$ $R_G=39\Omega$ Inductive Load $T_{vj}=125^{\circ}\text{C}$	---	198	---	ns
t_f	Turn-off Fall Time		---	376	---	ns
E_{on}	Turn-on Switching Loss		---	7.93	---	mJ
E_{off}	Turn-off Switching Loss		---	1.58	---	mJ
I_{SC}	SC data	$V_{GE}\leq 15\text{V}$, $V_{CC}=600\text{V}$ $t_p\leq 10\mu\text{s}$, $T_{vj}=25^{\circ}\text{C}$	---	37.26	---	A
R_{thJC}	Thermal Resistance, Junction to Case	per IGBT	---	1.00	1.15	K/W
R_{thCH}	Thermal Resistance, Case to Heatsink	per IGBT $\lambda_{\text{Paste}}=1\text{W}/(\text{m}\cdot\text{k})$, $\lambda_{\text{Grease}}=1\text{W}/(\text{m}\cdot\text{k})$	---	1.05	---	K/W
$T_{VJ\text{ OP}}$	Virtual Junction Temperature	under Switching	-40	---	150	$^{\circ}\text{C}$

Diode - Brake

Maximum Rated Values

Symbol	Description	Conditions	Values	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	$T_{vj}=25^{\circ}\text{C}$	1200	V
I_F	Gate-Emitter Voltage		10	A
I_{FRM}	Repetitive Peak Collector Current	$t_p=1\text{ms}$	20	A

Characteristic Values

Symbol	Description	Conditions	Values			Unit
			Min.	Typ.	Max.	
V_F	Forward Voltage	$I_F=10\text{A}, V_{GE}=0\text{V}, T_{vj}=25^{\circ}\text{C}$	---	2.2	2.8	V
		$I_F=10\text{A}, V_{GE}=0\text{V}, T_{vj}=125^{\circ}\text{C}$	---	1.8	---	V
I_{RM}	Peak Reverse Recovery Current	$I_F=10\text{A}, di/dt=200\text{A/us}$ $V_R=600\text{V}, V_{GE}=-15\text{V}$ $T_{vj}=25^{\circ}\text{C}$	---	8.34	---	A
Q_r	Recovered Charge		---	0.79	---	uC
E_{rec}	Reverse Recovery Energy		---	0.18	---	mJ
I_{RM}	Peak Reverse Recovery Current	$I_F=10\text{A}, di/dt=200\text{A/us}$ $V_R=600\text{V}, V_{GE}=-15\text{V}$ $T_{vj}=125^{\circ}\text{C}$	---	9.55	---	A
Q_r	Recovered Charge		---	1.07	---	uC
E_{rec}	Reverse Recovery Energy		---	0.24	---	mJ
R_{thJC}	Thermal Resistance, Junction to Case	per Diode	---	1.70	1.85	K/W
R_{thCH}	Thermal Resistance, Case to Heatsink	per IGBT $\lambda_{Paste}=1\text{W}/(\text{m}\cdot\text{k}), \lambda_{Grease}=1\text{W}/(\text{m}\cdot\text{k})$	---	1.30	---	K/W
$T_{VJ OP}$	Virtual Junction Temperature	under Switching	-40	---	150	$^{\circ}\text{C}$

NTC-Thermistor

Characteristic Values


Symbol	Description	Conditions	Values			Unit
			Min.	Typ.	Max.	
R_{25}	Rated Resistance	$T_C=25^{\circ}\text{C}$	---	5	---	K Ω
$B_{25/50}$	B Value	$R_2 = R_{25} \exp [B_{25/50}(1/T_2 - 1/(298 \text{ K}))]$	---	3375	---	K

Module



Symbol	Description	Conditions	Values	Unit
V_{ISOL}	Isolation Test Voltage	RMS, $f=50\text{Hz}$, $t=1\text{min}$	2.5	KV
	Internal Isolation	Basic Insulation (Class 1, IEC 61140)	Al_2O_3	
	Creepage Distance	Terminal to Heatsink Terminal to Terminal	11.5 6.3	mm
	Clearance	Terminal to Heatsink Terminal to Terminal	10 5	mm
CTI	Comparative Tracking Index		> 200	

Symbol	Description	Conditions	Values			Unit
			Min.	Typ.	Max.	
L_{SCE}	Stray Inductance Module		---	92	---	nH
$R_{CC'+EE'}$ $R_{AA'+CC'}$	Module Lead Resistance, Terminals – Chip	$T_C=25^\circ\text{C}$, per Switch	---	8 6	---	m Ω
T_{stg}	Storage Temperature		-40	---	125	$^\circ\text{C}$
F	Mounting Force per Clamp		20	---	50	N
G	Weight		---	24	---	g





Typical Characteristics

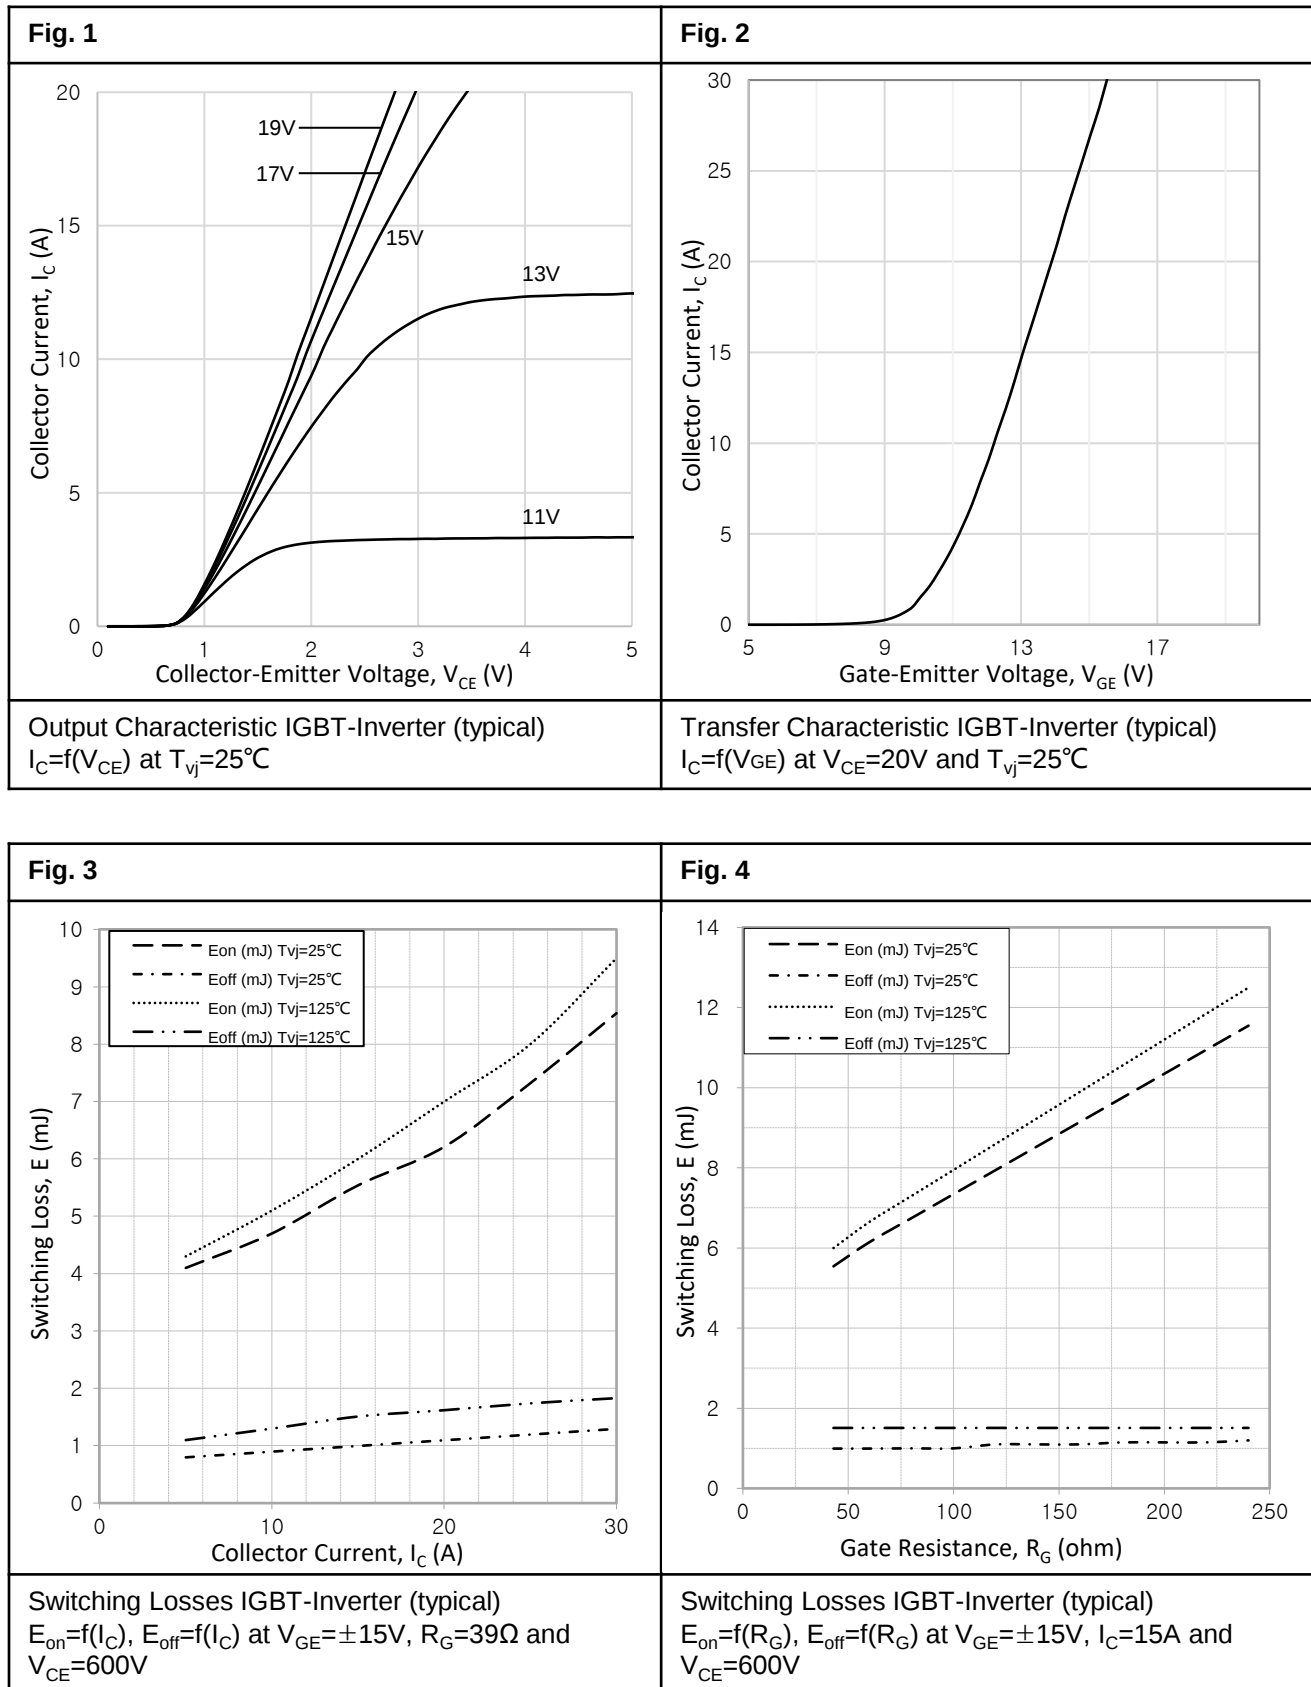



Typical Characteristics

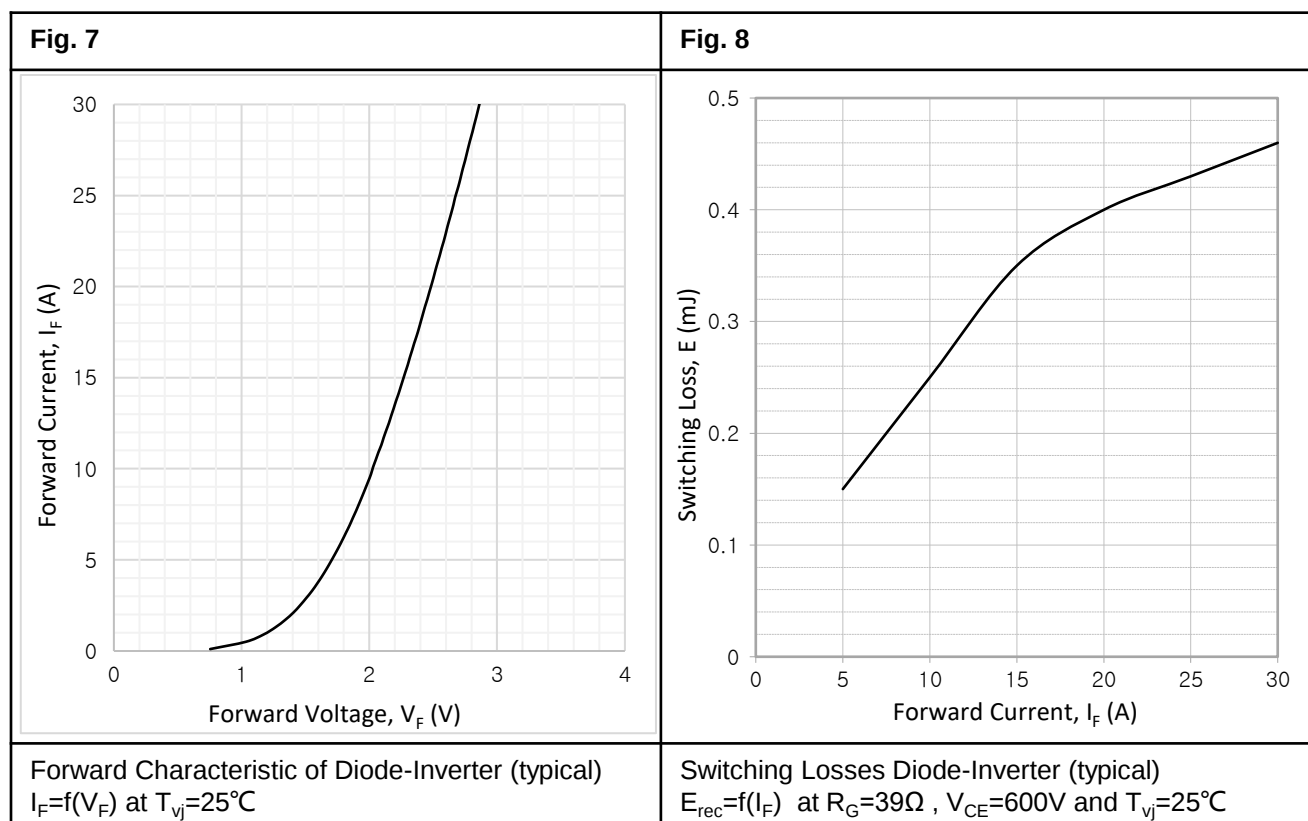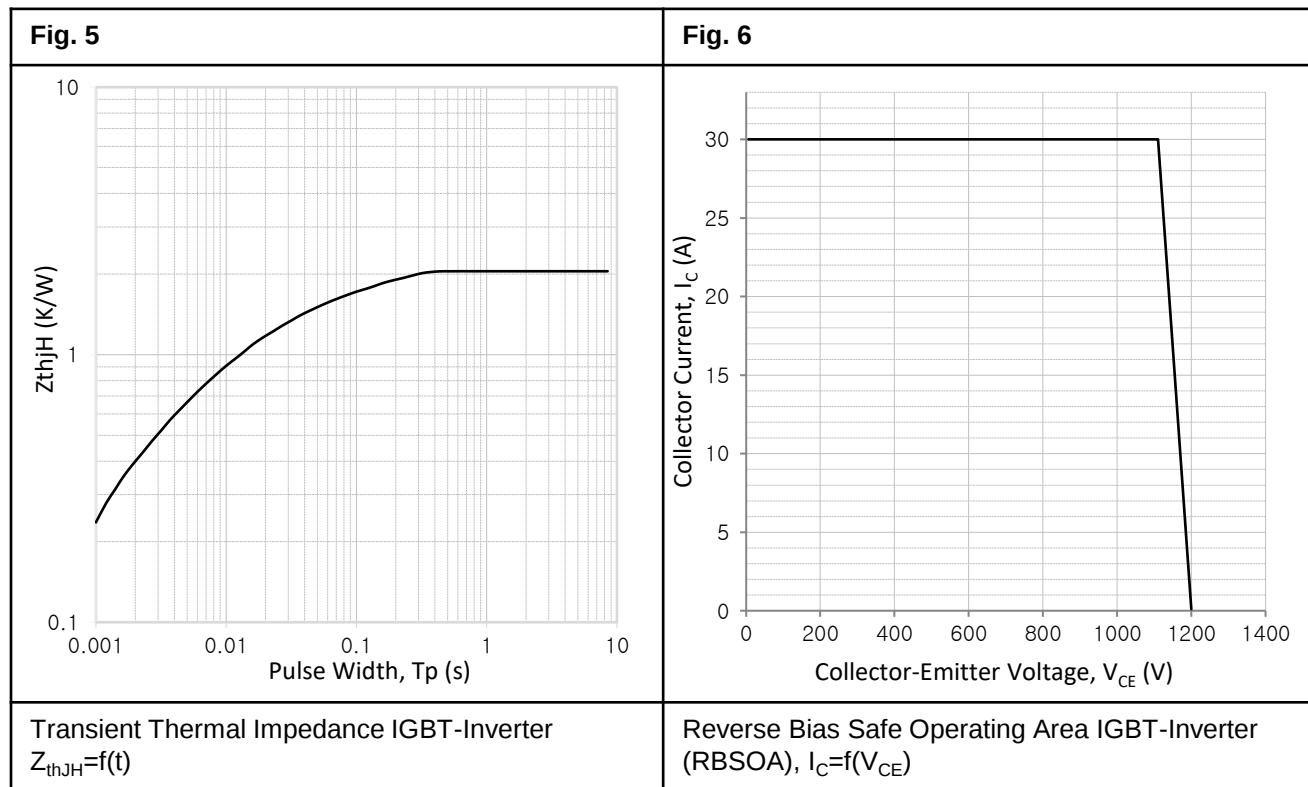


Typical Characteristics

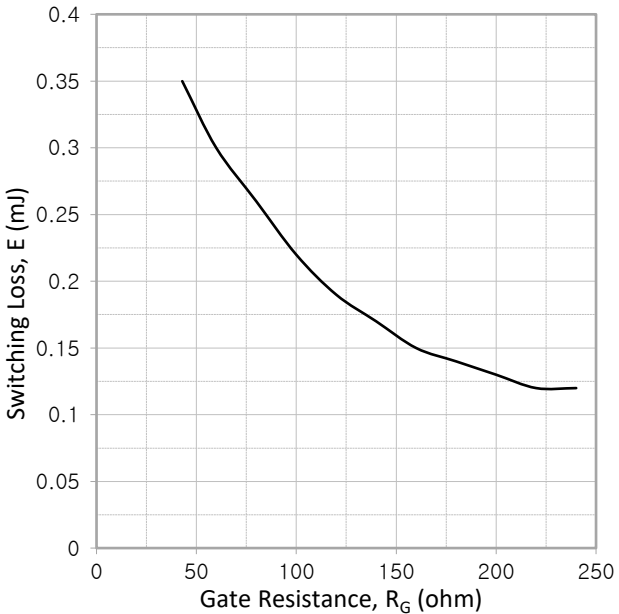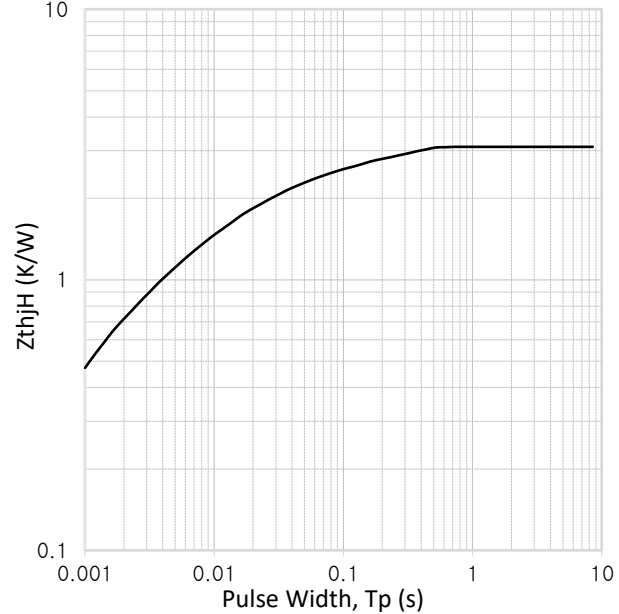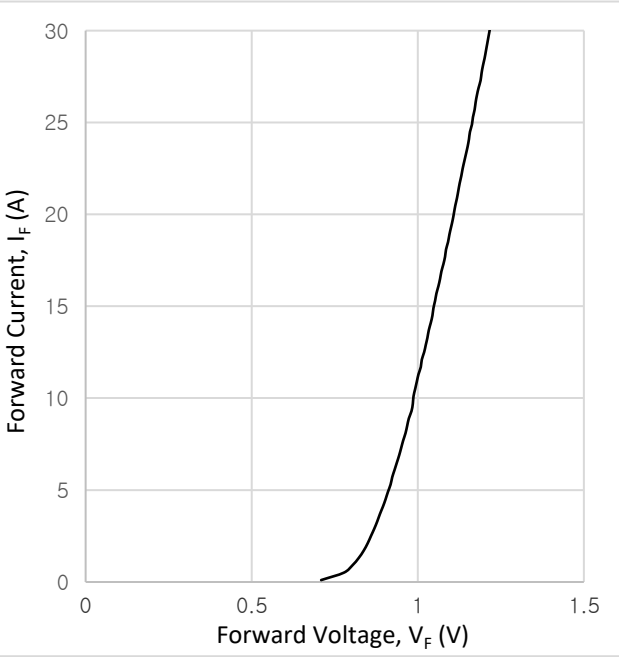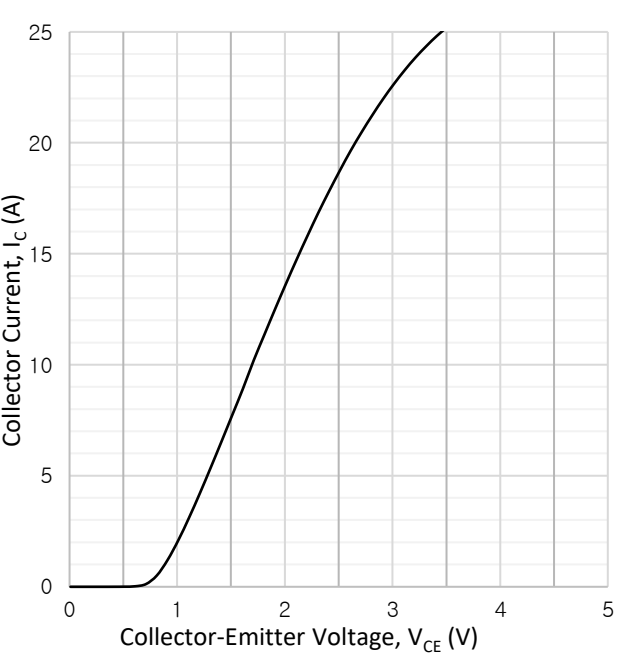Fig. 9  Switching Losses Diode-Inverter (typical) $E_{rec}=f(R_G)$ at $I_F=15A$, $V_{CE}=600V$ and $T_{vj}=25^{\circ}C$	Fig. 10  Transient Thermal Impedance Diode-Inverter $Z_{thjH}=f(t)$
Fig. 11  Forward Characteristic of Diode-Rectifier (typical) $I_F=f(V_F)$ at $T_{vj}=25^{\circ}C$	Fig. 12  Output Characteristic IGBT-Brake (typical) $I_C=f(V_{CE})$ at $V_{GE}=15V$ and $T_{vj}=25^{\circ}C$


Typical Characteristics

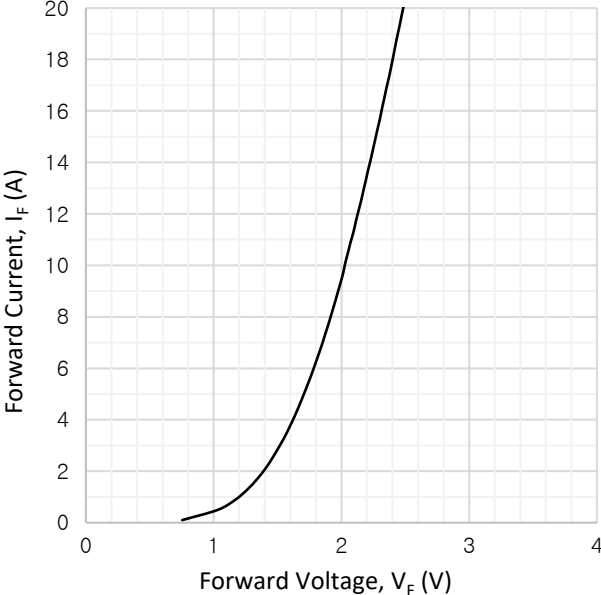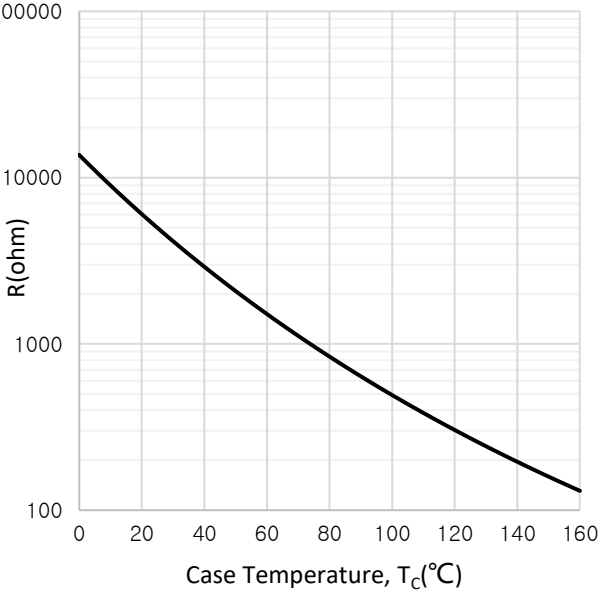Fig. 13  Forward Current, I_F (A) Forward Voltage, V_F (V) Forward Characteristic of Diode-Brake (typical) $I_F=f(V_F)$ at $T_{vj}=25\text{ }^{\circ}\text{C}$	Fig. 14  $R(\text{ohm})$ Case Temperature, $T_C(^{\circ}\text{C})$ NTC-Thermistor-Temperature Characteristic (typical), $R=f(T)$
--	--

Circuit Diagram

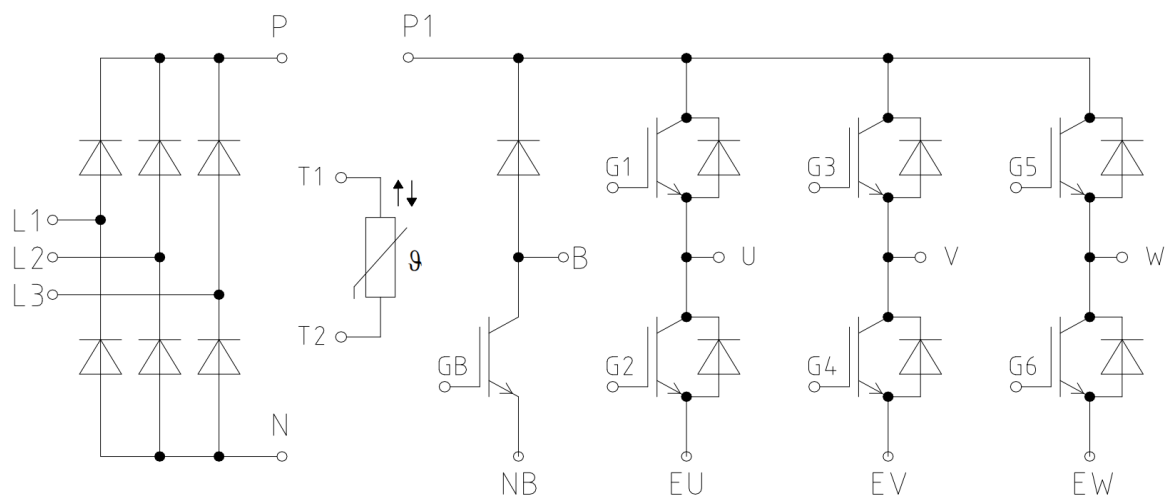

Package Outlines (mm)

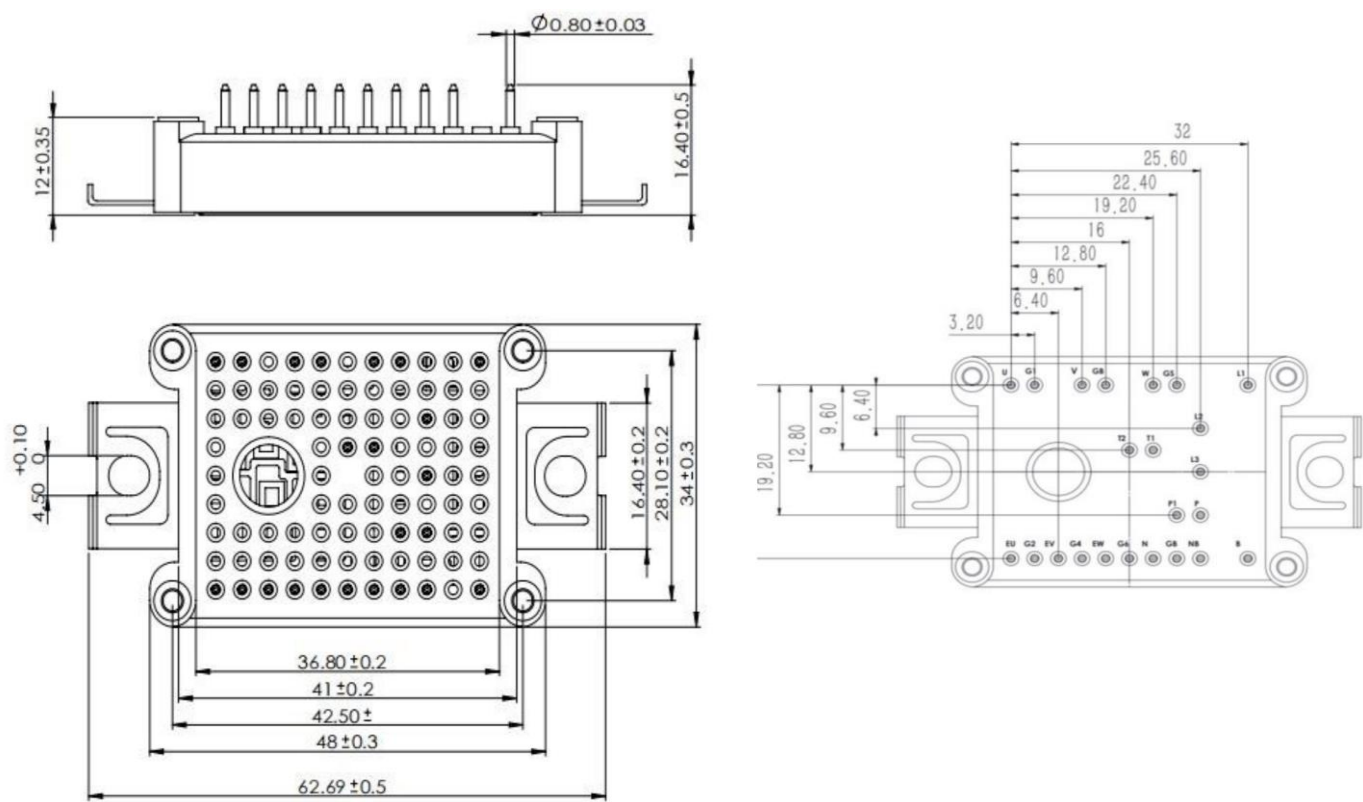

Revision History

Ver.	Date	Change Notice
1.0	2020/11/10	Released
1.1	2021/03/30	Released