环保物料

TEL:0769-82001899

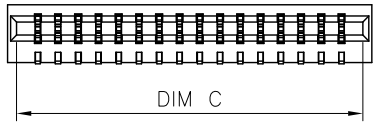

F1005-H-xx-28T-x

- H=上下接
- Pin位数
- T=镀锡 G=镀金
- R=卷装 无=管装

Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: −25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: ≤ 30mΩ
Insulation resistance: ≥ 500MΩ

Material Description:
Contact: Phosphor Bronze Tin−Leadplated
Housing: LCP(UL94V−0)

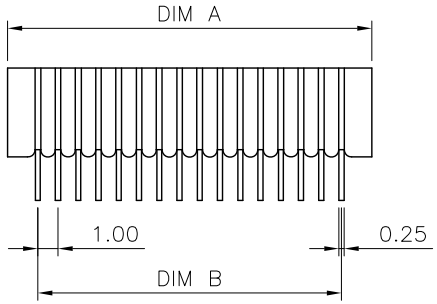





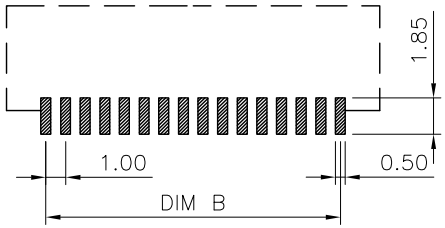

RECOMMENDED PCB LAYOUT





适用扁平电缆

PIN No.	DIM A	DIM B	DIM C	PIN No.	DIM A	DIM B	DIM C
4	6.00	3.00	5.10	24	26.00	23.00	25.10
5	7.00	4.00	6.10	25	27.00	24.00	26.10
6	8.00	5.00	7.10	26	28.00	25.00	27.10
7	9.00	6.00	8.10	27	29.00	26.00	28.10
8	10.00	7.00	9.10	28	30.00	27.00	29.10
9	11.00	8.00	10.10	29	31.00	28.00	30.10
10	12.00	9.00	11.10	30	32.00	29.00	31.10
11	13.00	10.00	12.10	31	33.00	30.00	32.10
12	14.00	11.00	13.10	32	34.00	31.00	33.10
13	15.00	12.00	14.10	33	35.00	32.00	34.10
14	16.00	13.00	15.10	34	36.00	33.00	35.10
15	17.00	14.00	16.10	35	37.00	34.00	36.10
16	18.00	15.00	17.10				
17	19.00	16.00	18.10				
18	20.00	17.00	19.10				
19	21.00	18.00	20.10				
20	22.00	19.00	21.10				
21	23.00	20.00	22.10				
22	24.00	21.00	23.10				
23	25.00	22.00	24.10				

WWW.XFCONN.COM

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	FPC 1.00mm Connectors
PART. NO.	F1005-H-xx-28T

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009