

inspired LED 24V RGBW Indoor Flex Strips

Color Changing LEDs

The **Spectrum Series 24 Volt RGBW Indoor System** from Inspired LED is a creative, customizable way to add a splash of color to your world! Available in custom lengths or 5 meter reels, these unique strips provide a range of up to 65 million color combinations. Energy efficient, long lasting, and dimmable with compatible systems, Inspired LED flex strips are the perfect option for any lighting application.



RGB + White


Specifications:	Voltage	Current	Wattage	Luminosity	Efficacy	Color Temp	CRI
Full-Spectrum White (Single Zone remote only)	24V	0.250 A	6.03 W/ft.	265 lm/ft.	44 lm/W	6370 K	60
Warm White (4- Zone or Single remote)	24V	0.070 A	1.69 W/ft.	135 lm/ft.	80 lm/W	3000 K	83

	Voltage	Current	Wattage	Radiant Power			Wavelengths		
RGB Colored Setting	24V	0.060 A	1.45 W/ft.	0.150 W/ft.	0.170 W/ft.	0.295 W/ft.	630nm	515nm	465nm


Product Features:

- 65 million color possibilities, including true white
- Size 5050 diodes, 0.66" spacing between each LED
- 72 LEDs/meter (18 LEDs/ft.) with cut points available every 3.94" (every 6 LEDs)
- 10mm flex available in custom cut lengths with pre-soldered leads, or 5m reels (16.4 ft)
- Adhesive backing mounts to almost any surface
- Minimal heat production, no IR or UV output
- Dimmable with compatible systems
- Rated to last up to 50,000 hours
- CE certified, RoHS Compliant
- **To be installed in accordance with NEC, using 24V plug-in or constant voltage power supplies.**

Basic Wiring Diagram:

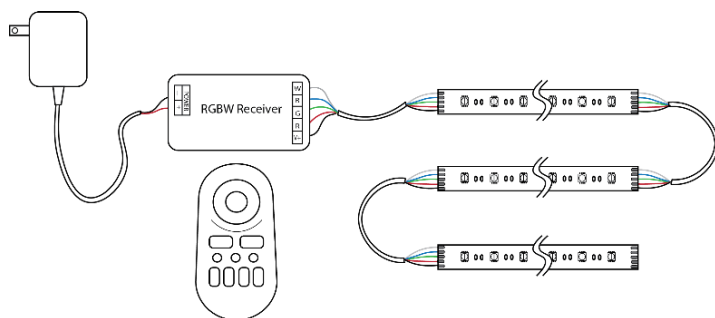

Product Dimensions:

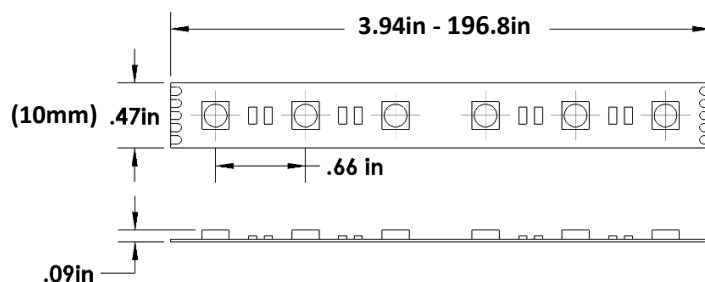

Installation Instructions:

NOTE: Individual strips over 16.4 ft. (5m) should be powered from the center to prevent voltage drop, single strips should not exceed 32ft

1. Clean desired mounting surface(s) and test all products prior to installation.
2. Temporarily mount RGBW flex strips in desired location using scotch or painters tape.
3. Interconnect RGBW strips with compatible five-conductor cable, ensuring all polarities are matched.
4. Run cable from LED system to compatible control device (see diagram for more detail).
5. Connect 24V power source to controller and test lighting system. When satisfied, peel adhesive backing from components and mount in place.

