

Double-Balanced Mixer

Rev. V3

Features

- LO 7 TO 17 GHz
- RF 9 TO 15 GHz
- IF DC TO 2.5 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- LOW NOISE FIGURE: 6.5 dB (TYP.)


Description

The M67 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Ordering Information

Part Number	Package
M67	Minpac
M67C	SMA Connectorized

Product Image

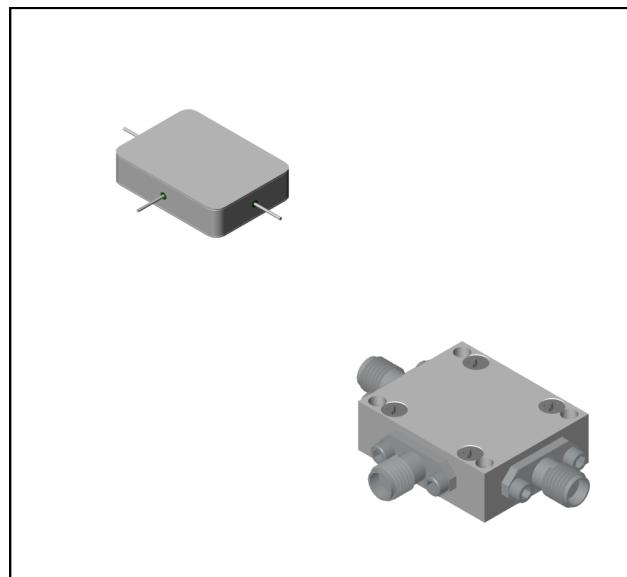

M/A-COM Technology Solutions Inc. All rights reserved.

Electrical Specifications ~~Zinc Oxide Varistor Protection (ZOV) is available on the M67C. The ZOV is not recommended for use in Down-Converter applications. (MACOM)~~
products. These materials are provided by MACOM as a service to its customers and may be used for


Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 9.5 to 13 GHz, fL = 9 to 13.5 GHz, fI = 30 to 500 GHz fR = 9 to 15 GHz, fL = 8 to 16 GHz, fI = 30 to 1000 GHz fR = 9 to 15 GHz, fL = 7 to 17 GHz, fI = 30 to 2000 GHz fR = 9.5 to 13.5 GHz, fL = 7 to 16 GHz, fI = 30 to 2500 GHz	dB	5.5 6.5 6.5 6.5	7.0 8.5 9.0 9.0	7.5 9.0 9.5 9.5
Isolation, L to R (min)	fL = 7 to 15 GHz fL = 15 to 17 GHz	dB	40 30	22 10	20 8
Isolation, L to I (min)	fL = 7 to 17 GHz	dB	25	15	13
1 dB Conversion Comp.	fL = +10 dBm	dBm	+4		
Input IP3	fR1=11.5 GHz at -6 dBm,fR2=11.5GHz at -6 dBm, fL = 12 GHz at = +10 dBm	dBm	+11		

Double-Balanced Mixer


Rev. V3

Typical Performance Curves


Conversion Loss vs. LO Drive

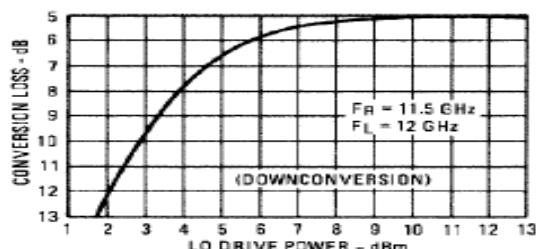



Conversion Loss vs. RF Input Power

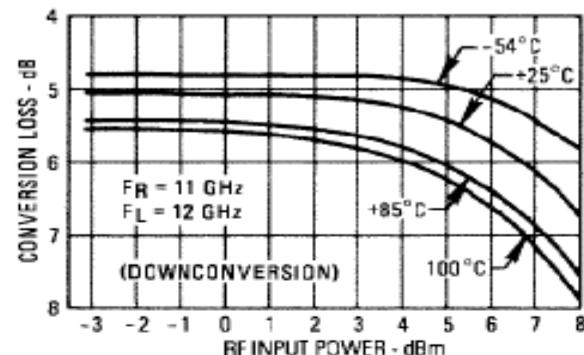


Conversion Loss vs. Frequency

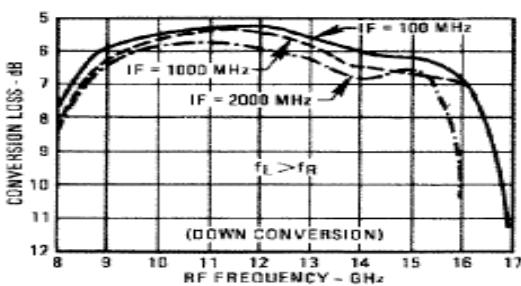


Isolation vs. Frequency

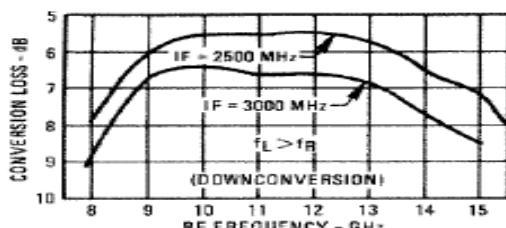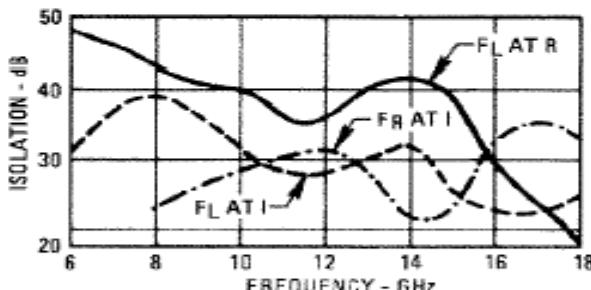

L-Port VSWR vs. Frequency

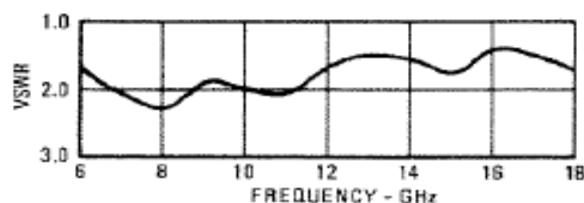

Conversion Loss vs. Output Frequency

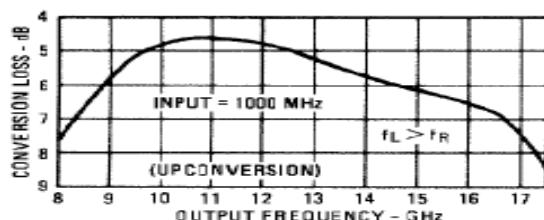

Solutions
ction wit
DM as
MACOM'
ent, M
ns in th
, without
atsoever
s. No lic
ocument

HOUT V
OF M
A PA
R INFR
COM FU
EXT, GR
ABLE F
DUT LIMITATION, LOST REVENUES OR LOST PROFITS,
MATERIALS.

medical, lifesaving or life sustaining applications. MACOM
e in such applications do so at their own risk and agree to
om such improper use or sale.


Double-Balanced Mixer

Rev. V3



Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+23 dBm max @ +25°C +20 dBm max @ +100°C
Peak Input Current	50 mA DC


R-Port VSWR vs. Frequency

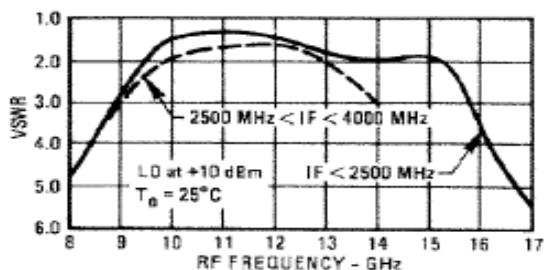

I-Port VSWR vs. f_L

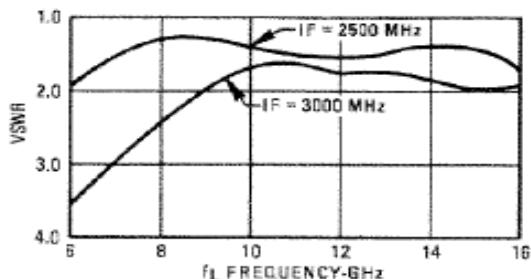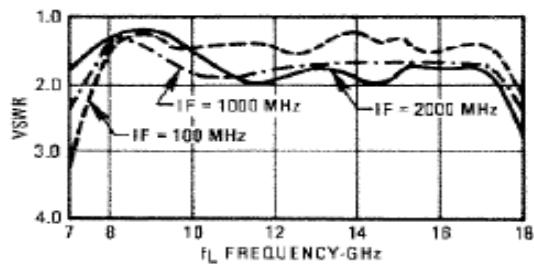


Outline Drawing: Minpac *

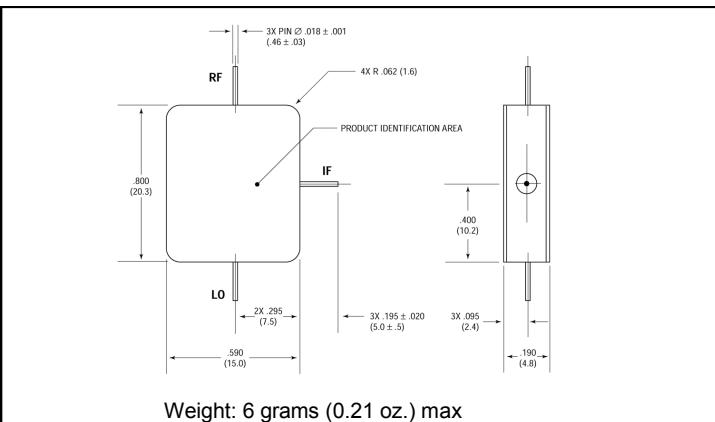

Weight: 6 grams (0.21 oz.) max

Outline Drawing: SMA Connectorized *

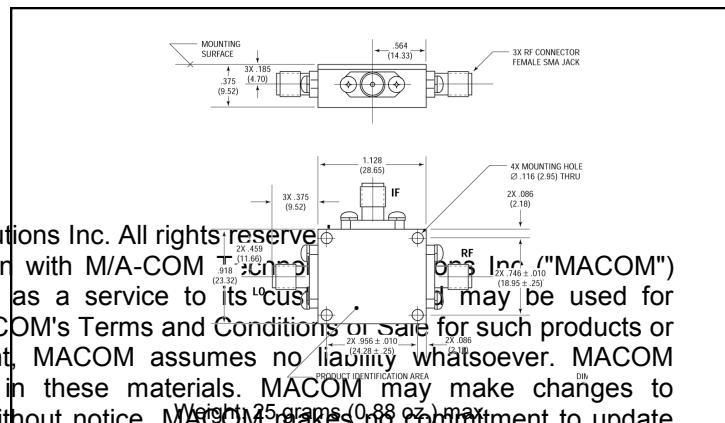

© Solutions Inc. All rights reserved. Selection with M/A-COM Technology Solutions Inc. ("MACOM") as a service to its customers may be used for MACOM's Terms and Conditions of Sale for such products or MACOM assumes no liability whatsoever. MACOM reserves the right to make changes to these materials. MACOM may make changes to these materials without notice. MACOM makes no commitment to update these materials. No license, express or implied, by estoppel or otherwise, is granted by this document.

* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.

WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, OF MACOM PRODUCTS INCLUDING LIABILITY OR FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR TRADEMARK. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OF TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN. MACOM IS NOT LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOST REVENUES OR LOST PROFITS, OR OTHER MATERIALS.

medical, lifesaving or life sustaining applications. MACOM use in such applications do so at their own risk and agree to indemnify MACOM from such improper use or sale.