

128 Mb HYPERRAM™ self-refresh DRAM (PSRAM)

Octal xSPI, 1.8 V/3.0 V

Features

- Interface
 - xSPI (Octal) interface
 - 1.8 V / 3.0 V interface support
 - Single ended clock (CK) - 11 bus signals
 - Optional differential clock (CK, CK#) - 12 bus signals
 - Chip Select (CS#)
 - 8-bit data bus (DQ[7:0])
 - Hardware reset (RESET#)
 - Bidirectional read-write data strobe (RWDS)
 - Output at the start of all transactions to indicate refresh latency
 - Output during read transactions as read data strobe
 - Input during write transactions as write data mask
 - Optional DDR center-aligned read strobe (DCARS)
 - During read transactions RWDS is offset by a second clock, phase shifted from CK
 - The phase shifted clock is used to move the RWDS transition edge within the read data eye
- Performance, power, and packages
 - 200-MHz maximum clock rate
 - DDR transfers data on both edges of the clock
 - Data throughput up to 400 MBps (3,200 Mbps)
 - Configurable burst characteristics
 - Linear burst
 - Wrapped burst lengths:
 - 16 bytes (8 clocks)
 - 32 bytes (16 clocks)
 - 64 bytes (32 clocks)
 - 128 bytes (64 clocks)
 - Hybrid option - one wrapped burst followed by linear burst on 64 Mb. Linear burst across die boundary is not supported.
 - Configurable output drive strength
 - Power modes^[1]
 - Hybrid Sleep mode
 - Deep Power Down
 - Array refresh
 - Partial memory array (1/8, 1/4, 1/2, and so on)
 - Full

Note

1. 128-Mb HYPERRAM™ is a stacked-die chip using two 64-Mb dice. Only one die, at a time, can be programmed to enter hybrid sleep mode or deep power down mode.

Performance summary

- Package
 - 24-ball FBGA
- Operating temperature range
 - Industrial (I): -40°C to +85°C
 - Industrial Plus (V): -40°C to +105°C
 - Automotive, AEC-Q100 Grade 3: -40°C to +85°C
 - Automotive, AEC-Q100 Grade 2: -40°C to +105°C
- Technology
 - 38-nm DRAM

Performance summary

Maximum read rates

| Read transaction timings | Value and unit |
|----------------------------------------------|----------------|
| Maximum clock rate at 1.8 V V_{CC}/V_{CCQ} | 200 MHz |
| Maximum clock rate at 3.0 V V_{CC}/V_{CCQ} | 200 MHz |
| Maximum access time, (t_{ACC}) | 35 ns |

Typical current consumption

| Maximum current consumption | Value and unit |
|-----------------------------------------------------------|-------------------|
| Burst read or write (linear burst at 200 MHz, 1.8 V) | 50 mA |
| Burst read or write (linear burst at 200 MHz, 3.0 V) | 60 mA |
| Standby ($CS\# = V_{CC} = 3.6\text{ V}$, 105°C) | 750 μA |
| Deep power down ($CS\# = V_{CC} = 3.6\text{ V}$, 105°C) | 360 μA |
| Standby ($CS\# = V_{CC} = 2.0\text{ V}$, 105°C) | 660 μA |
| Deep power down ($CS\# = V_{CC} = 2.0\text{ V}$, 105°C) | 330 μA |

Logic block diagram

Logic block diagram

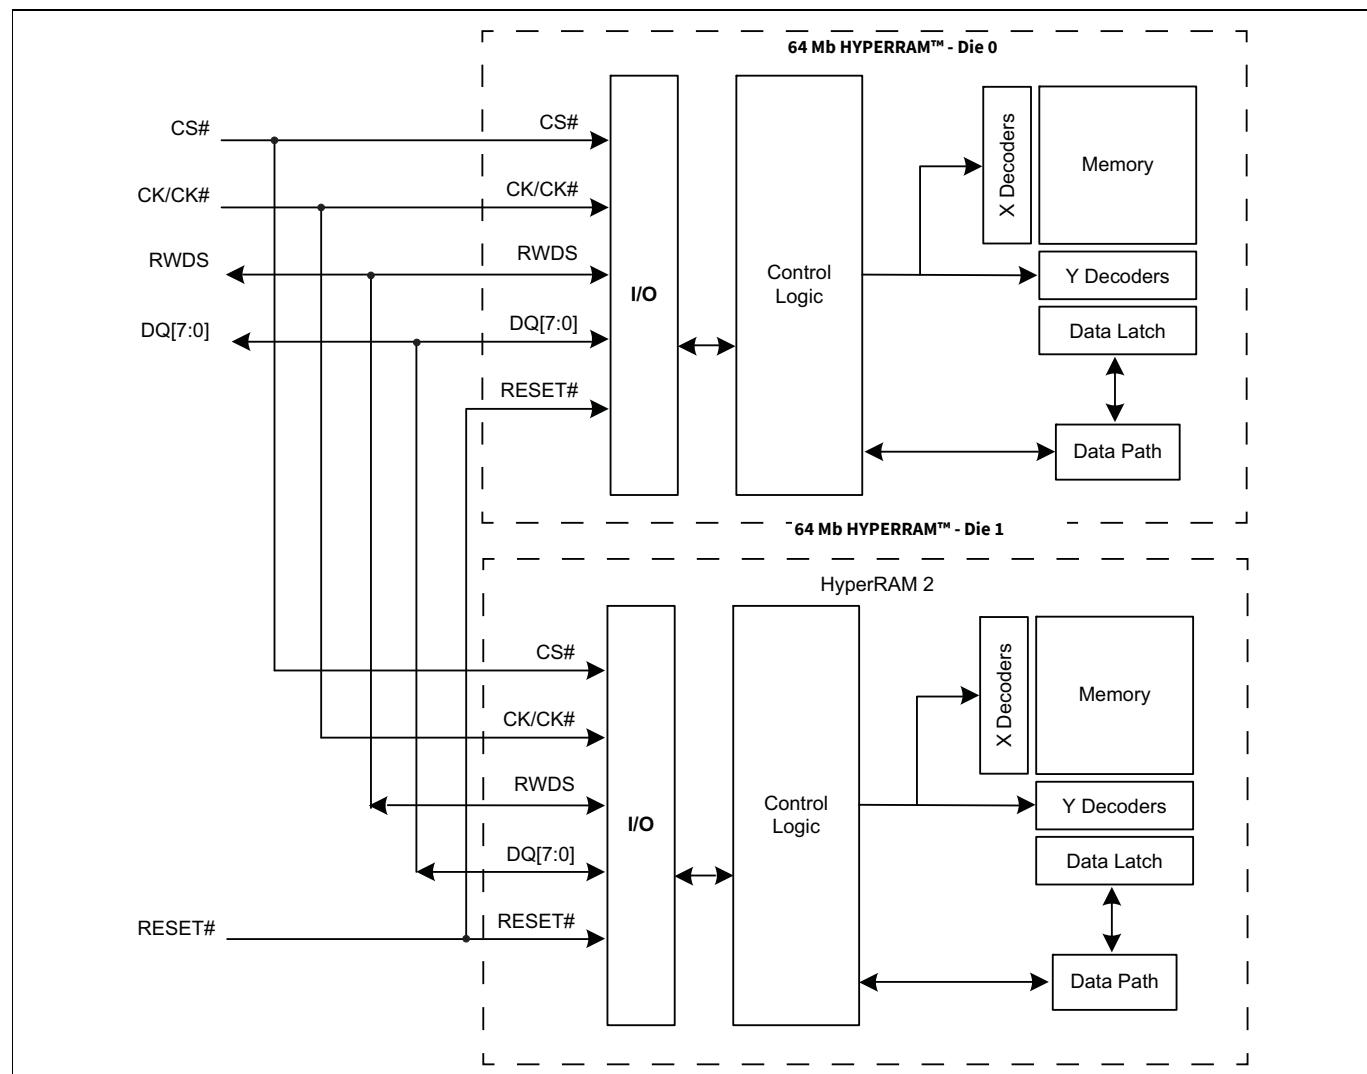


Table of contents

| | |
|-------------------------------------------------------------------|----|
| Features | 1 |
| Performance summary | 2 |
| Logic block diagram | 3 |
| Table of contents | 4 |
| 1 General description | 6 |
| 1.1 xSPI (Octal) interface | 6 |
| 2 Product overview | 9 |
| 2.1 xSPI (Octal) interface | 9 |
| 3 Signal description | 10 |
| 3.1 Input/output summary | 10 |
| 4 xSPI (Octal) transaction details | 11 |
| 4.1 Command/address/data bit assignments | 12 |
| 4.2 RESET ENABLE transaction | 13 |
| 4.3 RESET transaction | 13 |
| 4.4 READ ID transaction | 14 |
| 4.5 DEEP POWER DOWN transaction | 15 |
| 4.6 READ transaction | 16 |
| 4.7 WRITE transaction | 16 |
| 4.8 WRITE ENABLE transaction | 17 |
| 4.9 WRITE DISABLE transaction | 17 |
| 4.10 READ ANY REGISTER transaction | 18 |
| 4.11 WRITE ANY REGISTER transaction | 18 |
| 4.12 Data placement during memory READ/WRITE transactions | 19 |
| 4.13 Data placement during register READ/WRITE transactions | 20 |
| 5 Memory space | 21 |
| 5.1 xSPI (Octal) interface | 21 |
| 5.2 Density and row boundaries | 21 |
| 6 Register space access | 22 |
| 6.1 xSPI (Octal) interface | 22 |
| 6.2 Device Identification Registers | 23 |
| 6.3 Device Configuration Registers | 24 |
| 6.3.1 Configuration Register 0 (CR0) | 24 |
| 6.3.2 Configuration Register 1 | 28 |
| 7 Interface states | 30 |
| 8 Power conservation modes | 31 |
| 8.1 Interface standby | 31 |
| 8.2 Active clock stop | 31 |
| 8.3 Hybrid sleep | 32 |
| 8.4 Deep power down | 33 |
| 9 Electrical specifications | 34 |
| 9.1 Absolute maximum ratings | 34 |
| 9.2 Input signal overshoot | 34 |
| 9.3 Latch-up characteristics | 35 |
| 9.4 Operating ranges | 35 |
| 9.4.1 Temperature ranges | 35 |
| 9.4.2 Power supply voltages | 35 |
| 9.5 DC characteristics | 36 |
| 9.5.1 Capacitance characteristics | 40 |
| 9.5.2 Thermal resistance | 40 |
| 9.6 Power-up initialization | 41 |
| 9.7 Power down | 42 |

Table of contents

| | |
|--------------------------------------------------------------------------------|-----------|
| 9.8 Hardware reset..... | 43 |
| 9.9 Software reset..... | 44 |
| 10 Timing specifications | 45 |
| 10.1 Key to switching waveforms..... | 45 |
| 10.2 AC test conditions | 45 |
| 10.3 CLK characteristics | 47 |
| 10.4 AC characteristics..... | 48 |
| 10.4.1 Read transactions | 48 |
| 10.4.2 Write transactions..... | 50 |
| 11 Physical interface | 51 |
| 11.1 FBGA 24-ball 5 x 5 array footprint | 51 |
| 11.2 Package diagram | 52 |
| 12 DDR center-aligned read strobe (DCARS) functionality | 53 |
| 12.1 xSPI HYPERRAM™ products with DCARS signal description | 53 |
| 12.2 HYPERRAM™ products with DCARS — FBGA 24-ball, 5 x 5 array footprint | 55 |
| 12.3 HYPERRAM™ memory with DCARS timing | 56 |
| 13 Ordering information | 58 |
| 13.1 Ordering part number..... | 58 |
| 13.2 Valid combinations | 59 |
| 13.3 Valid combinations – Automotive grade / AEC-Q100..... | 59 |
| 14 Acronyms | 60 |
| 15 Document conventions | 61 |
| 15.1 Units of measure | 61 |
| Revision history | 62 |

1 General description

The Infineon 128-Mb HYPERRAM™ device is a high-speed CMOS, self-refresh DRAM, with xSPI (Octal) interface. The DRAM array uses dynamic cells that require periodic refresh. Refresh control logic within the device manages the refresh operations on the DRAM array when the memory is not being actively read or written by the xSPI interface master (host). Since the host is not required to manage any refresh operations, the DRAM array appears to the host as though the memory uses static cells that retain data without refresh. Hence, the memory is more accurately described as pseudo static RAM (PSRAM).

Since the DRAM cells cannot be refreshed during a read or write transaction, there is a requirement that the host limit read or write burst transfers lengths to allow internal logic refresh operations when they are needed. The host must confine the duration of transactions and allow additional initial access latency, at the beginning of a new transaction, if the memory indicates a refresh operation is needed. The dual-die, 128-Mb HYPERRAM™ chip supports data transactions with additional (2X) latency only.

1.1 xSPI (Octal) interface

xSPI (Octal) is a SPI-compatible low signal count, DDR interface supporting eight I/Os. The DDR protocol in xSPI (Octal) transfers two data bytes per clock cycle on the DQ input/output signals. A read or write transaction on xSPI (Octal) consists of a series of 16-bit wide, one clock cycle data transfers at the internal RAM array with two corresponding 8-bit wide, one-half-clock-cycle data transfers on the DQ signals. All inputs and outputs are LV-CMOS compatible. Device are available as 1.8 V V_{CC}/V_{CCQ} or 3.0 V V_{CC}/V_{CCQ} (nominal) for array (V_{CC}) and I/O buffer (V_{CCQ}) supplies, through different ordering part number (OPN).

Each transaction on xSPI (Octal) must include a command whereas address and data are optional. The transactions are structures as follows:

- Each transaction begins with CS# going LOW and ends with CS# returning HIGH.
- The serial clock (CK) marks the transfer of each bit or group of bits between the host and memory. All transfers occur on every CK edge (DDR mode).
- Each transaction has a 16-bit command which selects the type of device operation to perform. The 16-bit command is based on two 8-bit opcodes. The same 8-bit opcode is sent on both edges of the clock.
- A command may be stand-alone or may be followed by address bits to select a memory location in the device to access data.
- Read transactions require a latency period after the address bits and can be zero to several CK cycles. CK must continue to toggle during any read transaction latency period. During the command and address parts of a transaction, the memory indicates that an additional latency period is needed for a required refresh time (t_{RFH}) by driving the RWDS signal to the HIGH state.
- Write transactions to registers do not require a latency period.
- Write transactions to the memory array require a latency period after the address bits and can be zero to several CK cycles. CK must continue to toggle during any write transaction latency period. During the command and address parts of a transaction, the memory indicates that an additional latency period is needed for a required refresh time (t_{RFH}) by driving the RWDS signal to the HIGH state.
- In all transactions, command and address bits are shifted in the device with the most significant bits (MSb) first. The individual data bits within a data byte are shifted in and out of the device MSb first as well. All data bytes are transferred with the lowest address byte sent out first.

General description

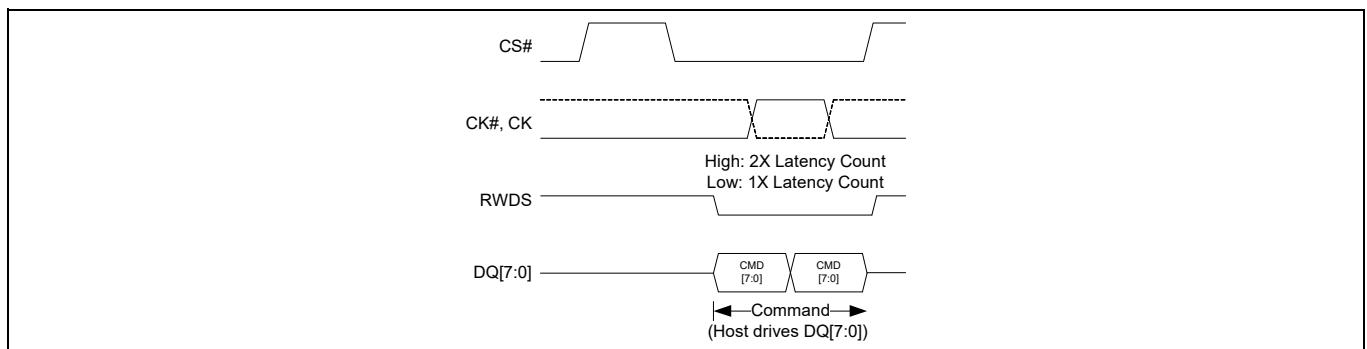


Figure 1 xSPI (Octal) command only transaction (DDR)^[2]

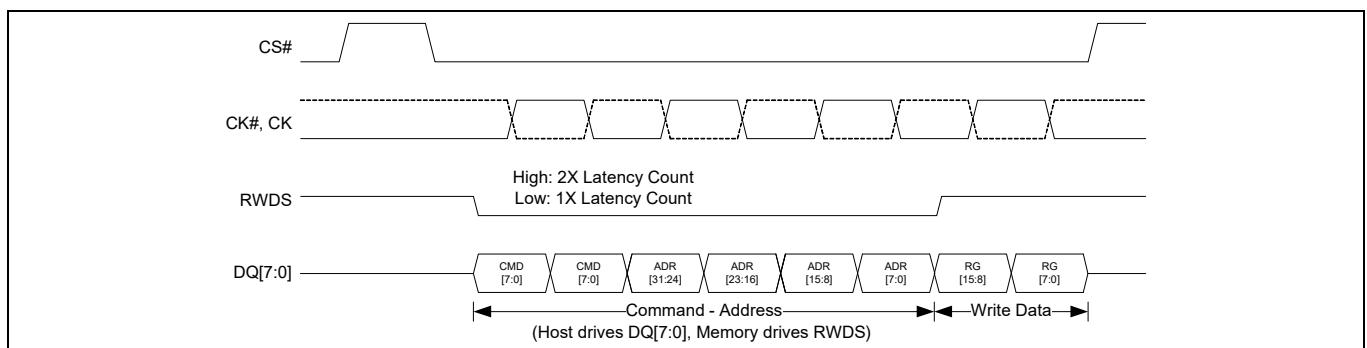


Figure 2 xSPI (Octal) write with no latency transaction (DDR) (Register writes)^[3]

Notes

2. The initial latency “low = 1x latency count” is not applicable in dual-die, 128 Mb HYPERRAM™.
3. Write with no latency transaction is used for register writes only.

General description

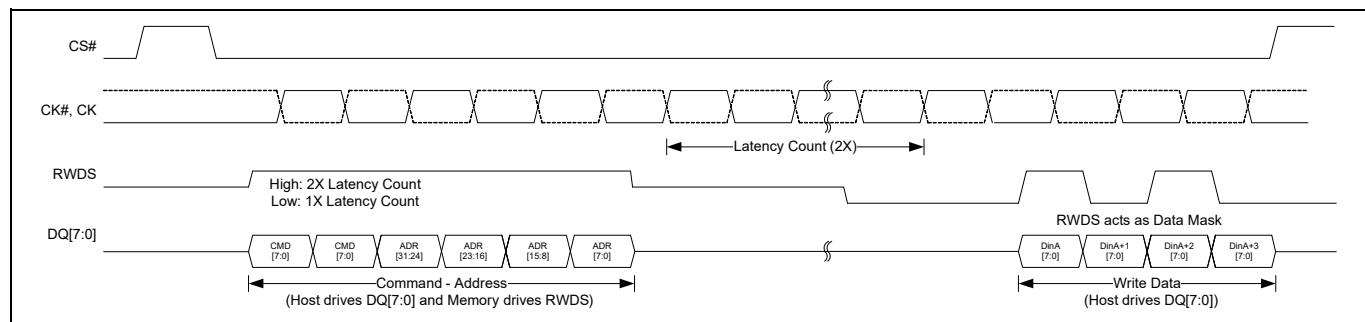


Figure 3 xSPI (Octal) write with 2X latency transaction (DDR) (Memory array writes)^[4, 5, 6]

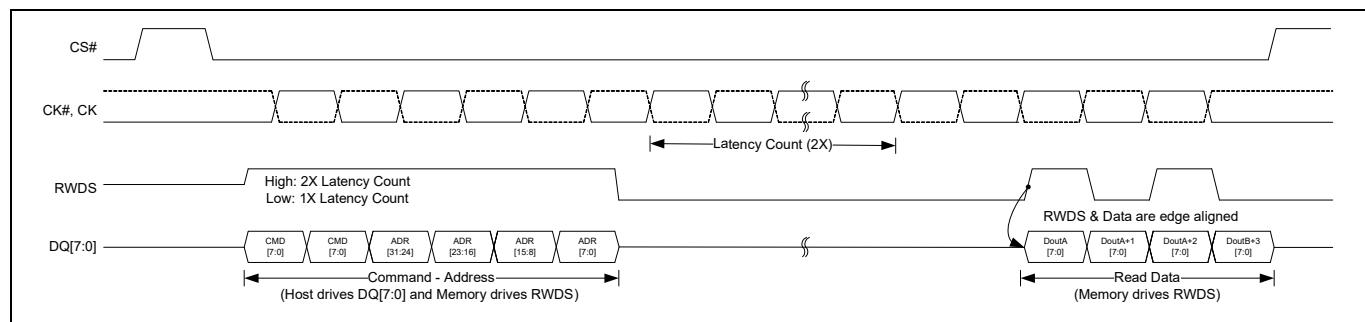


Figure 4 xSPI (Octal) read with 2X latency transaction (DDR) (All reads)^[4, 7]

Notes

4. The initial latency “low = 1x latency count” is not applicable in dual-die, 128 Mb HYPERRAM™.
5. RWDS is driven by HYPERRAM™ during command & address cycles for 2X latency and then driven by the host for data masking.
6. Data DinA and DinA+2 are masked.
7. RWDS is driven by HYPERRAM™ during command and address cycles for 2X latency and then driven again phase aligned with data.

2 Product overview

The 128-Mb HYPERRAM™ device is 1.8 V or 3.0 V array and I/O, synchronous self-refresh dynamic RAM (DRAM). The HYPERRAM™ device provides an xSPI (Octal) slave interface to the host system. The xSPI (Octal) interface has an 8-bit (1 byte) wide DDR data bus and use only word-wide (16-bit data) address boundaries. Read transactions provide 16 bits of data during each clock cycle (8 bits on both clock edges). Write transactions take 16 bits of data from each clock cycle (8 bits on each clock edge).

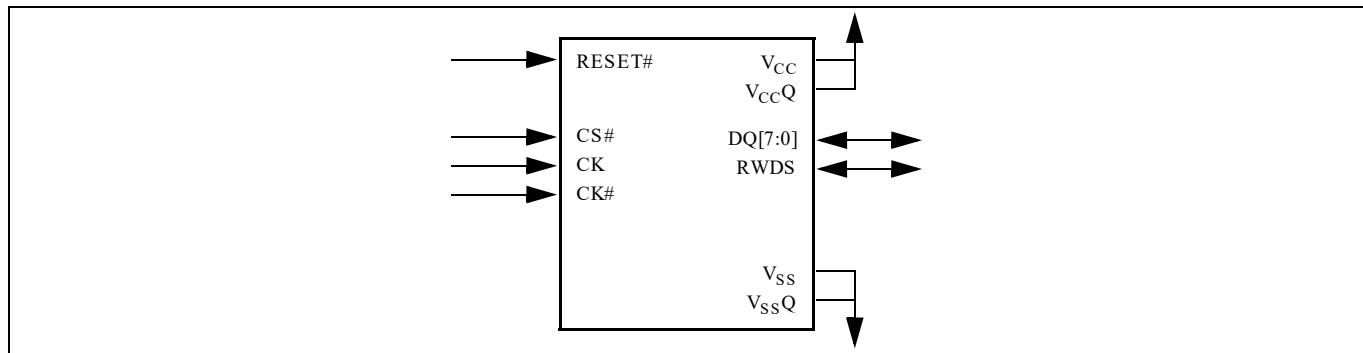


Figure 5 xSPI (Octal) HYPERRAM™ interface^[8]

2.1 xSPI (Octal) interface

Read and write transactions require three clock cycles to define the target row/column address and then an initial access latency of t_{ACC} . During the CA part of a transaction, the memory indicates an additional latency for a required refresh time (t_{RFH}) by driving the RWDS signal to the HIGH state. During a read (or write) transaction, after the initial data value has been output (or input), additional data can be read from (or written to) the row on subsequent clock cycles in either a wrapped or linear sequence. When configured in linear burst mode, the device will automatically fetch the next sequential row from the memory array to support a continuous linear burst. Simultaneously accessing the next row in the array while the read or write data transfer is in progress, allows for a linear sequential burst operation that can provide a sustained data rate of 400 MBps (1 byte (8 bit data bus) * 2 (data clock edges) * 200 MHz = 400 MBps).

Note

8. CK# is used in differential clock mode, but optional.

Signal description

3 Signal description

3.1 Input/output summary

The xSPI (Octal) HYPERRAM™ signals are shown in [Table 1](#). Active Low signal names have a hash symbol (#) suffix.

Table 1 I/O Summary^[10]

| Symbol | Type | Description |
|---------------------------|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CS# | Master output, slave input | Chip Select. Bus transactions are initiated with a HIGH to LOW transition. Bus transactions are terminated with a Low to High transition. The master device has a separate CS# for each slave. |
| CK, CK#[^[9]] | | Differential Clock. Command, address, and data information is output with respect to the crossing of the CK and CK# signals. Use of differential clock is optional. Single Ended Clock. CK# is not used, only a single ended CK is used. The clock is not required to be free-running. |
| DQ[7:0] | Input/output | Data Input/Output. Command, address, and data information is transferred on these signals during read and write transactions. |
| RWDS | | Read-Write Data Strobe. During the command/address portion of all bus transactions RWDS is a slave output and indicates whether additional initial latency is required. Slave output during read data transfer, data is edge aligned with RWDS. Slave input during data transfer in write transactions to function as a data mask. The dual-die, 128-Mb HYPERRAM™ chip supports data transactions with additional (2X) latency only. |
| RESET# | Master output, slave input, internal pull-up | Hardware RESET. When LOW, the slave device will self initialize and return to the standby state. RWDS and DQ[7:0] are placed into the HIGH-Z state when RESET# is LOW. The slave RESET# input includes a weak pull-up, if RESET# is left unconnected it will be pulled up to the HIGH state. |
| V _{CC} | Power supply | Array Power. |
| V _{CCQ} | | Input/Output Power. |
| V _{SS} | | Array Ground. |
| V _{SSQ} | | Input/Output Ground. |
| RFU | No connect | Reserved for Future Use. May or may not be connected internally, the signal/ball location should be left unconnected and unused by PCB routing channel for future compatibility. The signal/ball may be used by a signal in the future. |

Notes

9. CK# is used in differential clock mode, but optional connection. Tie the CK# input pin to either VccQ or VssQ if not connected to the host controller, but do not leave it floating.
10. Optional DCARS pinout and pin description are outlined in section “[DDR center-aligned read strobe \(DCARS\) functionality](#)” on page 53.

4 xSPI (Octal) transaction details

The xSPI (Octal) master begins a transaction by driving CS# LOW while clock is idle. Then the clock begins toggling while CA words are transferred.

For memory read and write transactions, the xSPI (Octal) master then continues clocking for a number of cycles defined by the latency count setting in Configuration Register 0 (register write transactions do not require any latency count). The initial latency count required for a particular clock frequency is based on RWDS. If RWDS is LOW during the CA cycles, one latency count is inserted. If RWDS is HIGH during the CA cycles, an additional latency count is inserted. Once these latency clocks have been completed the memory starts to simultaneously transition the RWDS and output the target data. The dual-die, 128-Mb HYPERRAM™ chip supports data transactions with additional (2X) latency only.

During the read data transfers, read data is output edge aligned with every transition of RWDS. Data will continue to be output as long as the host continues to transition the clock while CS# is LOW. Note that burst transactions should not be so long as to prevent the memory from doing distributed refreshes.

During the write data transfers, write data is center-aligned with the clock edges. The first byte of data in each word is captured by the memory on the rising edge of CK and the second byte is captured on the falling edge of CK. RWDS is driven by the host master interface as a data mask. When data is being written and RWDS is HIGH the byte will be masked and the array will not be altered. When data is being written and RWDS is LOW the data will be placed into the array. Because the master is driving RWDS during write data transfers, neither the master nor the HYPERRAM™ device are able to indicate a need for latency within the data transfer portion of a write transaction. The acceptable write data burst length setting is also shown in Configuration Register 0.

Wrapped bursts will continue to wrap within the burst length and linear burst will output data in a sequential manner across row boundaries. When a linear burst read reaches the last address in the array, continuing the burst beyond the last address will provide data from the beginning of the address range. Read transfers can be ended at any time by bringing CS# HIGH when the clock is idle. The clock is not required to be free-running. The clock may remain idle while CS# is HIGH.

xSPI (Octal) transaction details

4.1 Command/address/data bit assignments

Table 2 Command set [11, 12, 13, 14, 15]

| Command | Code | CA-Data | Address (bytes) | Latency cycles | Data (bytes) | Prerequisite |
|-----------------------------|------|---------|-----------------|----------------|---------------|--------------|
| Software Reset | | | | | | |
| RESET ENABLE | 0x66 | 8-0-0 | 0 | 0 | 0 | |
| RESET | 0x99 | 8-0-0 | 0 | 0 | 0 | RESET ENABLE |
| Identification | | | | | | |
| READ ID ^[11] | 0x9F | 8-8-8 | 4 (0x00) | 3-7 | 4 | |
| Power Modes | | | | | | |
| DEEP POWER DOWN | 0xB9 | 8-0-0 | 0 | 0 | 0 | |
| Read Memory Array | | | | | | |
| READ (DDR) | 0xEE | 8-8-8 | 4 | 3-7 | 1 to ∞ | |
| Write Memory Array | | | | | | |
| WRITE (DDR) | 0xDE | 8-8-8 | 4 | 3-7 | 1 to ∞ | WRITE ENABLE |
| Write Enable/Disable | | | | | | |
| WRITE ENABLE | 0x06 | 8-0-0 | 0 | 0 | 0 | |
| WRITE DISABLE | 0x04 | 8-0-0 | 0 | 0 | 0 | |
| Read Registers | | | | | | |
| READ ANY REGISTER | 0x65 | 8-8-8 | 4 | 3-7 | 2 | |
| Write Registers | | | | | | |
| WRITE ANY REGISTER | 0x71 | 8-8-8 | 4 | 0 | 2 | WRITE ENABLE |

Notes

11. The two identification registers contents are read together - identification 0 followed by identification 1.
12. Write Enable provides protection against inadvertent changes to memory or register values. It sets the internal write enable latch (WEL) which allows write transactions to execute afterwards.
13. Write Disable can be used to disable write transactions from execution. It resets the internal write enable latch (WEL).
14. The WEL latch stays set to '1' at the end of any successful memory write transaction. After a power down / power up sequence, or a hardware/software reset, WEL latch is cleared to '0'.
15. The internal WEL latch is cleared to '0' at the end of any successful register write transaction.

xSPI (Octal) transaction details

4.2 RESET ENABLE transaction

The RESET ENABLE transaction is required immediately before a RESET transaction. Any transaction other than RESET following RESET ENABLE will clear the reset enable condition and prevent a later RESET transaction from being recognized.

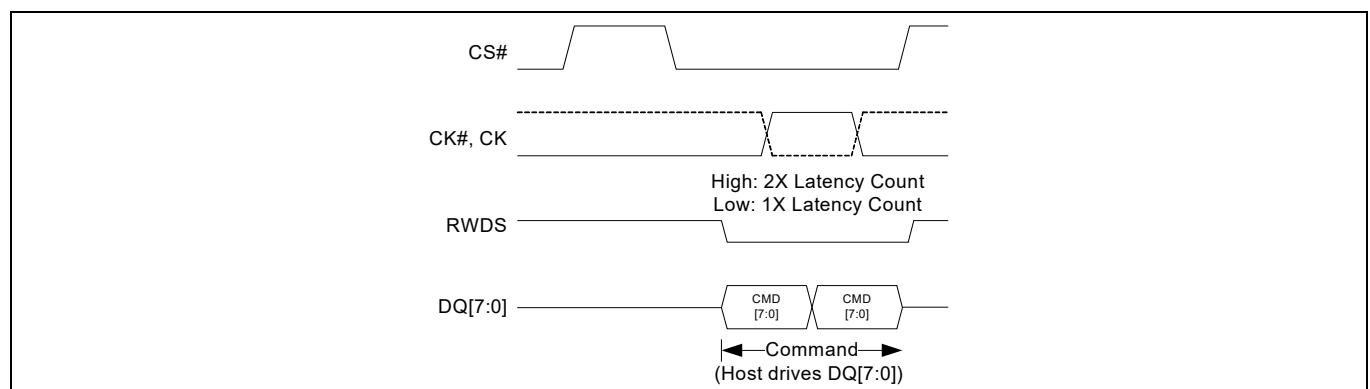


Figure 6 **RESET ENABLE transaction (DDR)**^[16]

4.3 RESET transaction

The RESET transaction immediately following a RESET ENABLE will initiate the software reset process.

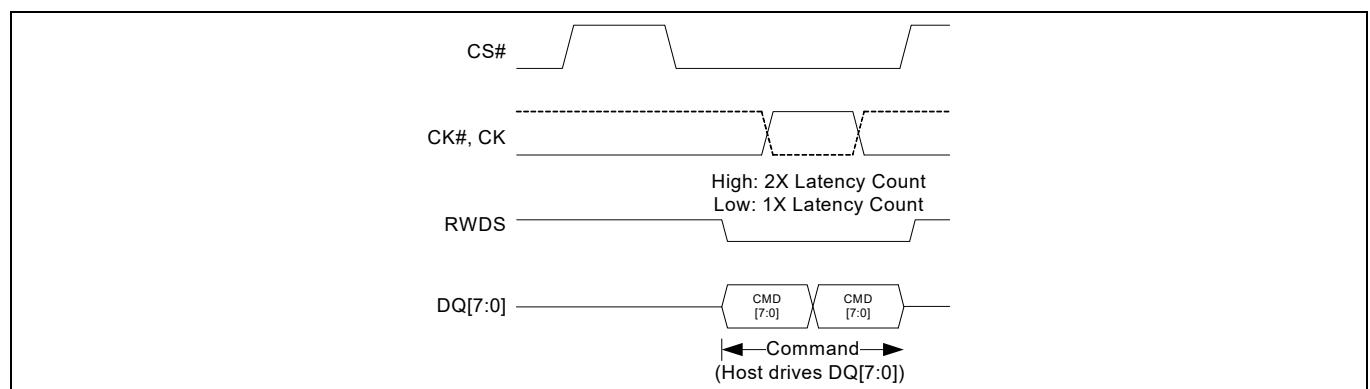


Figure 7 **RESET transaction (DDR)**^[16]

Note

16. The initial latency “low = 1x latency count” is not applicable in dual-die, 128-Mb HYPERRAM™.

4.4 READ ID transaction

The READ ID transaction provides read access to Device Identification Registers 0 and 1. The registers contain the manufacturer's identification along with device identification. The read data sequence is as follows.

Table 3 READ ID data sequence

| Address space | Byte order | Byte position | Word data bit | DQ |
|---------------|------------|---------------|---------------|----|
| Register 0 | Big-endian | A | 15 | 7 |
| | | | 14 | 6 |
| | | | 13 | 5 |
| | | | 12 | 4 |
| | | | 11 | 3 |
| | | | 10 | 2 |
| | | | 9 | 1 |
| | | | 8 | 0 |
| | | B | 7 | 7 |
| | | | 6 | 6 |
| | | | 5 | 5 |
| | | | 4 | 4 |
| | | | 3 | 3 |
| | | | 2 | 2 |
| | | | 1 | 1 |
| | | | 0 | 0 |
| Register 1 | Big-endian | A | 15 | 7 |
| | | | 14 | 6 |
| | | | 13 | 5 |
| | | | 12 | 4 |
| | | | 11 | 3 |
| | | | 10 | 2 |
| | | | 9 | 1 |
| | | | 8 | 0 |
| | | B | 7 | 7 |
| | | | 6 | 6 |
| | | | 5 | 5 |
| | | | 4 | 4 |
| | | | 3 | 3 |
| | | | 2 | 2 |
| | | | 1 | 1 |
| | | | 0 | 0 |

xSPI (Octal) transaction details

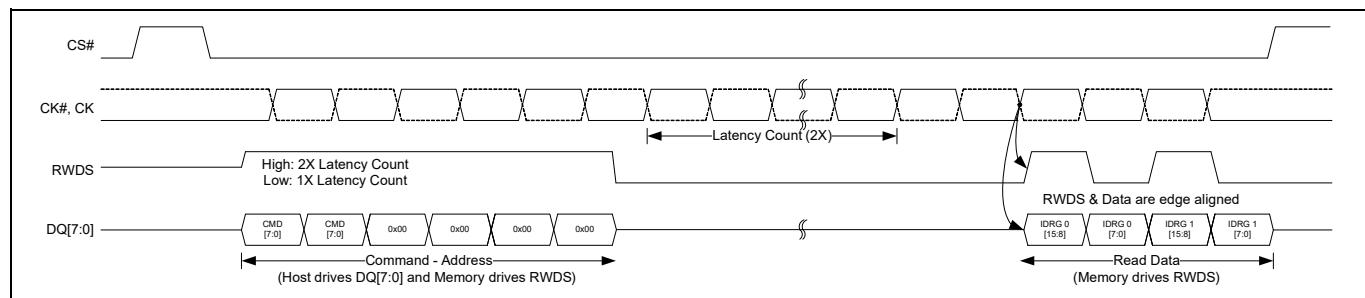


Figure 8 READ ID with 2X latency transaction (DDR)^[17]

4.5 DEEP POWER DOWN transaction

DEEP POWER DOWN transaction brings the device into deep power down state which is the lowest power consumption state. Writing a '0' to CR0[15] will also bring the device in deep power down State. All register contents are lost in deep power down state and the device powers-up in its default state.

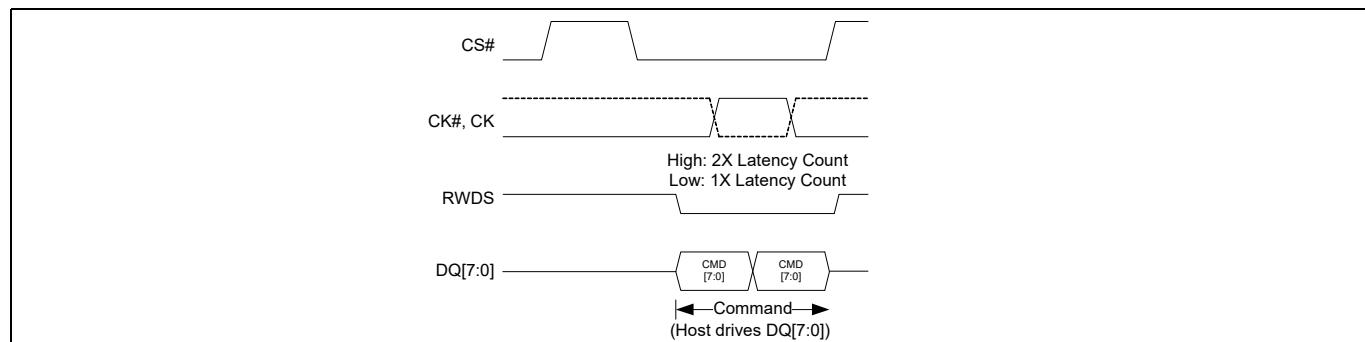


Figure 9 DEEP POWER DOWN transaction (DDR)^[17]

Note

17. The initial latency “low = 1x latency count” is not applicable in dual-die, 128-Mb HYPERRAM™.

4.6 READ transaction

The READ transaction reads data from the memory array. It has a latency requirement (dummy cycles) which allows the device's internal circuitry enough time to access the addressed memory location. During these latency cycles, the host can tristate the data bus DQ[7:0].

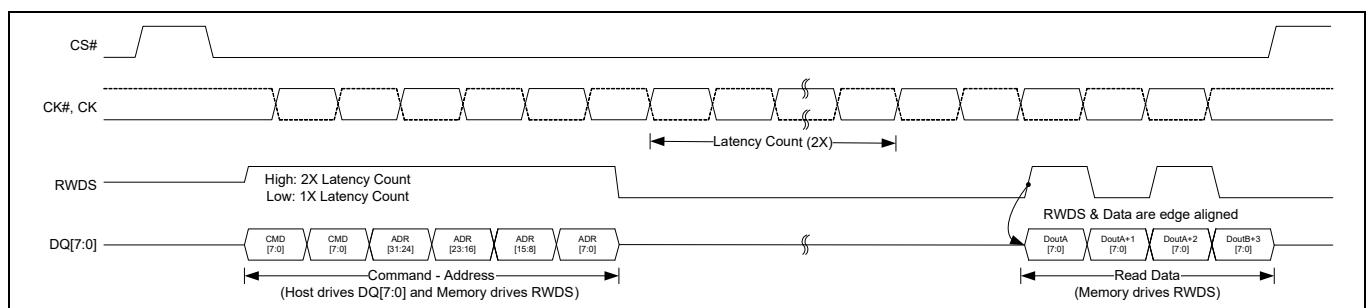


Figure 10 READ with 2X latency transaction (DDR)^[18, 19]

4.7 WRITE transaction

The WRITE transaction writes data to the memory array. It has a latency requirement (dummy cycles) which allows the device's internal circuitry enough time to access the addressed memory location. During these latency cycles, the host can tristate the data bus DQ[7:0].

WRITE ENABLE transaction which sets the WEL latch must be executed before the first WRITE. The WEL latch stays set to '1' at the end of any successful memory write transaction. It must be reset by WRITE DISABLE transaction to prevent any inadvertent writes to the memory array.

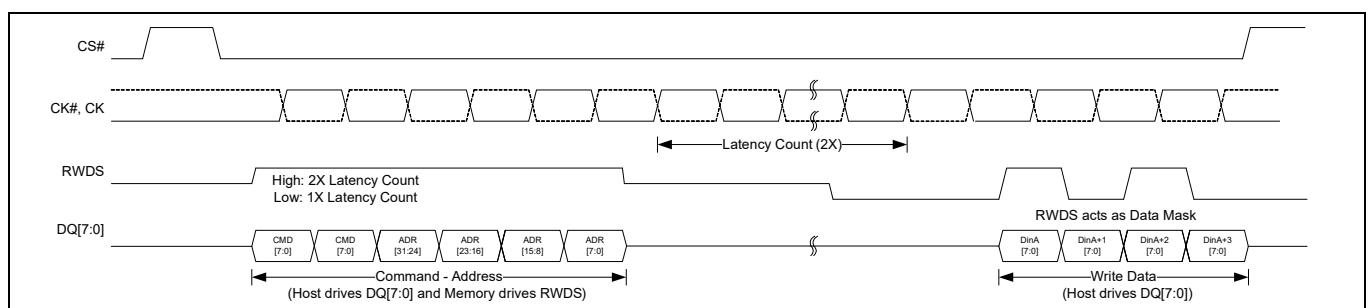


Figure 11 WRITE with 2X latency transaction (DDR)^[18, 19, 20]

Notes

18. RWDS is driven by HYPERRAM™ during command & address cycles for 2X latency and then is driven again phase aligned with data.
19. The initial latency "low = 1x latency count" is not applicable in dual-die, 128-Mb HYPERRAM™.
20. Data DinA and DinA+2 are masked.

xSPI (Octal) transaction details

4.8 WRITE ENABLE transaction

The WRITE ENABLE transaction must be executed prior to any transaction that modifies data either in the memory array or the registers.

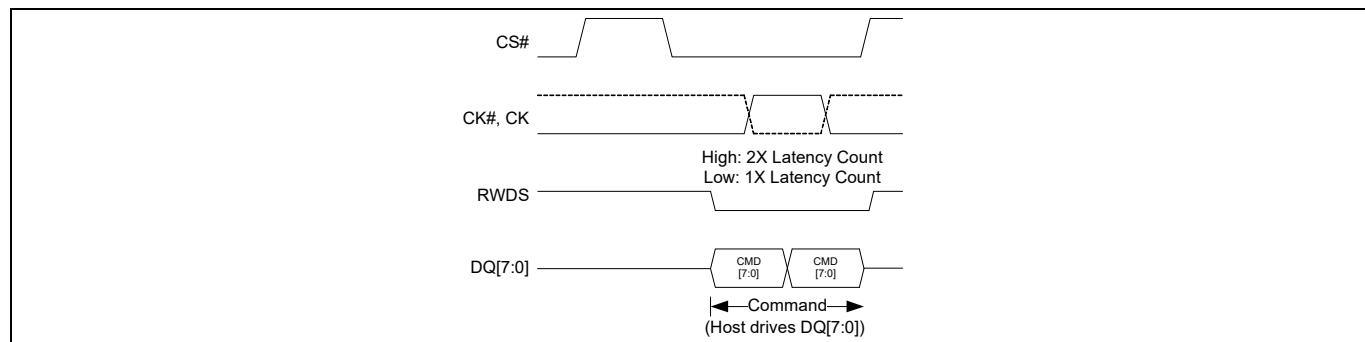


Figure 12 WRITE ENABLE transaction (DDR)^[21]

4.9 WRITE DISABLE transaction

The WRITE DISABLE transaction inhibits writing data either in the memory array or the registers.

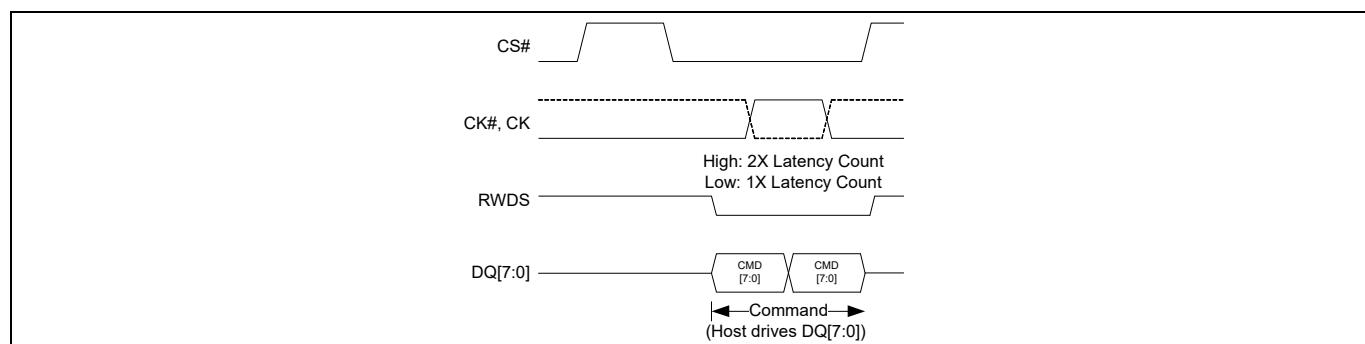


Figure 13 WRITE DISABLE transaction (DDR)^[21]

Note

21. The initial latency “low = 1x latency count” is not applicable in dual-die, 128-Mb HYPERRAM™.

4.10 READ ANY REGISTER transaction

The READ ANY REGISTER transaction reads all the device registers. It has a latency requirement (dummy cycles) which allows the device's internal circuitry enough time to access the addressed register location. During these latency cycles, the host can tristate the data bus DQ[7:0].

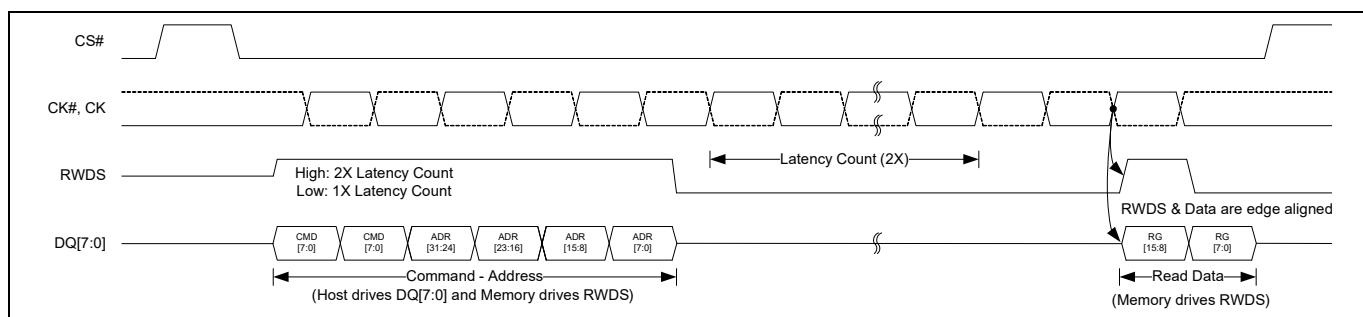


Figure 14 READ ANY REGISTER with 2X latency transaction (DDR)^[22, 23]

4.11 WRITE ANY REGISTER transaction

The WRITE ANY REGISTER transaction writes to the device registers. It does not have a latency requirement (dummy cycles).

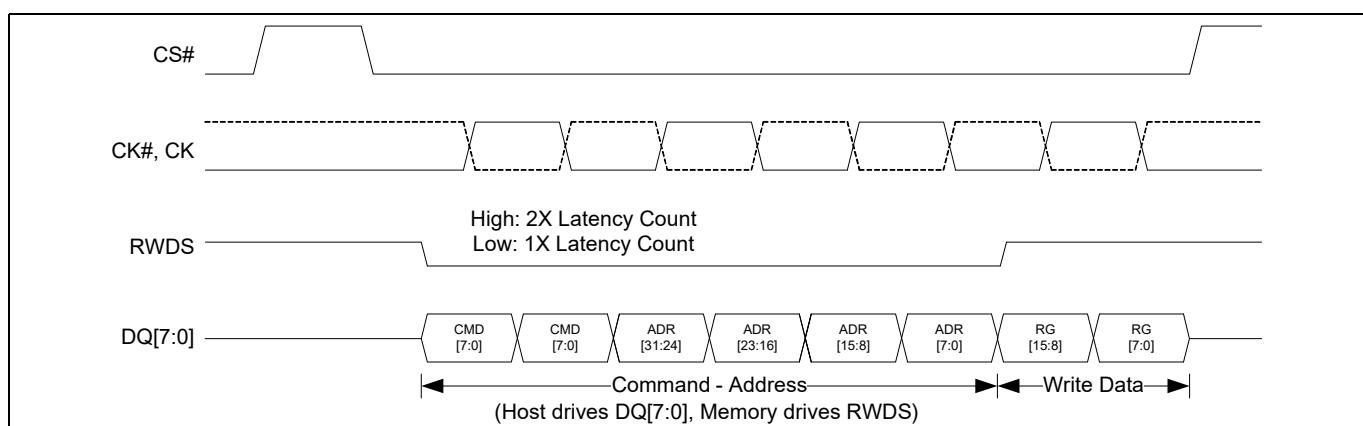


Figure 15 xSPI (Octal) write with no latency transaction (DDR) (Register writes)^[23, 24, 25]

Notes

- 22. RWDS is driven by HYPERRAM™ during command & address cycles for 2X latency and then driven again phase aligned with data.
- 23. The initial latency "low = 1x latency count" is not applicable in dual-die, 128-Mb HYPERRAM™.
- 24. Write with no latency transaction is used for register writes only.
- 25. Data mask on RWDS is not supported.

4.12 Data placement during memory READ/WRITE transactions

Data placement during memory read/write is dependent upon the host. The device will output data (read) as it was written in (write). Hence both big endian and little endian are supported for the memory array.

Table 4 Data placement during memory READ and WRITE

| Address space | Byte order | Byte position | Word data bit | DQ | Bit order |
|---------------|---------------|---------------|---------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Memory | Big-endian | A | 15 | 7 | When data is being accessed in memory space: The first byte of each word read or written is the "A" byte and the second is the "B" byte. The bits of the word within the A and B bytes depend on how the data was written. If the word lower address bits 7-0 are written in the A byte position and bits 15-8 are written into the B byte position, or vice versa, they will be read back in the same order. So, memory space can be stored and read in either little-endian or big-endian order. |
| | | | 14 | 6 | |
| | | | 13 | 5 | |
| | | | 12 | 4 | |
| | | | 11 | 3 | |
| | | | 10 | 2 | |
| | | | 9 | 1 | |
| | | | 8 | 0 | |
| | Little-endian | B | 7 | 7 | |
| | | | 6 | 6 | |
| | | | 5 | 5 | |
| | | | 4 | 4 | |
| | | | 3 | 3 | |
| | | | 2 | 2 | |
| | | | 1 | 1 | |
| | | | 0 | 0 | |
| | | | 7 | 7 | |
| | | | 6 | 6 | |
| | | | 5 | 5 | |
| | | | 4 | 4 | |
| | | | 3 | 3 | |
| | | | 2 | 2 | |
| | | | 1 | 1 | |
| | | | 0 | 0 | |
| | | | 15 | 7 | |
| | | | 14 | 6 | |
| | | | 13 | 5 | |
| | | | 12 | 4 | |
| | | | 11 | 3 | |
| | | | 10 | 2 | |
| | | | 9 | 1 | |
| | | | 8 | 0 | |

xSPI (Octal) transaction details

4.13 Data placement during register READ/WRITE transactions

Data placement during register read/write is big endian.

Table 5 Data placement during register READ/WRITE transactions

| Address space | Byte order | Byte position | Word data bit | DQ | Bit order |
|---------------|------------|---------------|---------------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Register | Big-endian | A | 15 | 7 | When data is being accessed in register space: During a read transaction on the xSPI (Octal) two bytes are transferred on each clock cycle. The upper order byte A (Word[15:8]) is transferred between the rising and falling edges of RWDS (edge aligned). The lower order byte B (Word[7:0]) is transferred between the falling and rising edges of RWDS. |
| | | | 14 | 6 | |
| | | | 13 | 5 | |
| | | | 12 | 4 | |
| | | | 11 | 3 | |
| | | | 10 | 2 | |
| | | | 9 | 1 | |
| | | | 8 | 0 | |
| | | B | 7 | 7 | During a write, the upper order byte A (Word[15:8]) is transferred on the CK rising edge and the lower order byte B (Word[7:0]) is transferred on the CK falling edge. Therefore, register space is always read and written in big-endian order because registers have device dependent fixed bit location and meaning definitions. |
| | | | 6 | 6 | |
| | | | 5 | 5 | |
| | | | 4 | 4 | |
| | | | 3 | 3 | |
| | | | 2 | 2 | |
| | | | 1 | 1 | |
| | | | 0 | 0 | |

Memory space

5 Memory space

5.1 xSPI (Octal) interface

Table 6 Memory space address map (Byte based - 8 bits with least significant bit A(0) always set to '0')

| Unit type | Count | System byte address bits | Address bits | Notes |
|---------------------------|---------------------|--------------------------|--------------|--------------------------------------------|
| Rows within 128-Mb device | 16384 (rows) | A22–A9 | 35–22 | |
| Rows within 64-Mb device | 8192 (rows) | A22–A10 | 22–10 | |
| Rows within 64-Mb device | 8192 (rows) | A22 - A10 | 22 - 10 | |
| Row | 1 (row) | A9–A4 | 9–4 | 512 (16-bit word) or 1 KB |
| Half-page | 16 (byte addresses) | A3–A0 | 3–0 | 16 bytes (8 words) A0 always set to '0' |

5.2 Density and row boundaries

The DRAM array size (density) of the device can be determined from the total number of system address bits used for the row and column addresses as indicated by the row address bit count and column address bit count fields in the ID0 register. For example: a 64-Mb HYPERRAM™ device has 10 column address bits and 13 row address bits for a total of 23 address bits (byte address) = 2^{23} = 8MB (4M words). The 10 column address bits indicate that each row holds 2^{10} = 512 words = 1KB. The row address bit count indicates there are 8196 rows to be refreshed within each array refresh interval. The row count is used in calculating the refresh interval.

Register space access

6 Register space access

6.1 xSPI (Octal) interface

Table 7 Register space address map (address bit A0 always set to '0')

| Registers | Address (Byte addressable) |
|------------------------------------------------------------------------------|--------------------------------------|
| Identification Registers 0 (ID0[15:0]) - Die 0 | 0x00000000 |
| Identification Registers 0 (ID0[15:0]) - Die 1 | 0x00400000 |
| Identification Registers 1 (ID1[15:0]) - Die 0 | 0x00000002 |
| Identification Registers 1 (ID1[15:0]) - Die 1 | 0x00400002 |
| Configuration Registers 0 (ID0[15:0]) - Die 0 | 0x00000004 |
| Configuration Registers 0 (ID0[15:0]) - Die 1 | 0x00400004 |
| Configuration Registers 1 (ID1[15:0]) - Die 0 | 0x00000006 |
| Configuration Registers 1 (ID1[15:0]) - Die 1 | 0x00400006 |
| Die Manufacture Information Register (Registers 0 to Register 17) - die 0 | 0x00000008, 0x0000000A to 0x0000002A |
| Die Manufacture Information Register (Registers 0 to Register 17) - die 1 | 0x00400008, 0x0040000A to 0x0040002A |

Register space access

6.2 Device Identification Registers

There are two read-only, non-volatile, word registers, that provide information on the device selected when CS# is LOW. The device information fields identify:

- Manufacturer
- Type
- Density
 - Row address bit count
 - Column address bit count

Refresh Type

Table 8 Identification Register 0 (ID0) bit assignments

| Bits | Function | Settings (Binary) |
|---------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| [15:14] | Reserved | 00b - Die 0 01b - Die 1 |
| 13 | Reserved | 0 - Default |
| 13 | Reserved | 0 - Default |
| [12:8] | Row address bit count | 00000 - One row address bit ... 11111 - Thirty-two row address bits ... 01100 - 64 Mb - Thirteen row address bits (default) |
| [7:4] | Column address bit count | 0000 - One column address bits ... 1000 - Nine column address bits (default) ... 1111 - Sixteen column address bits |
| [3:0] | Manufacturer | 0000 - Reserved 0001 - Cypress (default) 0010 to 1111 - Reserved |

Table 9 Identification Register 1 (ID1) bit assignments

| Bits | Function | Settings (Binary) |
|--------|-------------|-------------------------------------------------------|
| [15:4] | Reserved | 0000_0000_0000 (default) |
| [3:0] | Device type | 0001 - HYPERRAM™ 2.0 0000, 0010 to 1111 - Reserved |

Register space access

6.3 Device Configuration Registers

6.3.1 Configuration Register 0 (CR0)

Configuration Register 0 (CR0) is used to define the power state and access protocol operating conditions for the HYPERRAM™ device. Configurable characteristics include:

- Wrapped burst length (16, 32, 64, or 128 byte aligned and length data group)
- Wrapped burst type
 - Legacy wrap (sequential access with wrap around within a selected length and aligned group)
 - Hybrid wrap (legacy wrap once then linear burst at start of the next sequential group)
- Initial latency
- Variable latency
 - Whether an array read or write transaction will use fixed or variable latency. If fixed latency is selected the memory will always indicate a refresh latency and delay the read data transfer accordingly. If variable latency is selected, latency for a refresh is only added when a refresh is required at the same time a new transaction is starting.
- Output drive strength
- Deep power down (DPD) mode

Table 10 Configuration Register 0 (CR0) bit assignments

| CR0 bit | Function | Settings (Binary) |
|---------|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [15] | Deep power down enable | 1 - Normal operation (default). HYPERRAM™ will automatically set this value to '1' after DPD exit 0 - Writing 0 causes the device to enter deep power down Only one die of the 128-Mb stack-die HYPERRAM™ can be programmed to enter DPD mode at a time. |
| [14:12] | Drive strength | 000 - 34 Ω (default) 001 - 115 Ω 010 - 67 Ω 011 - 46 Ω 100 - 34 Ω 101 - 27 Ω 110 - 22 Ω 111 - 19 Ω |
| [11:8] | Reserved | 1 - Reserved (default) Reserved for future use. When writing this register, these bits should be set to 1 for future compatibility. |
| [7:4] | Initial latency | 0000 - 5 clock latency @ 133 Max frequency 0001 - 6 clock latency @ 166 Max frequency 0010 - 7 clock latency @ 200 MHz/166 MHz Max frequency (default) 0011 - Reserved 0100 - Reserved ... 1101 - Reserved 1110 - 3 clock latency @ 85 Max frequency 1111 - 4 clock latency @ 104 Max frequency |

Table 10 Configuration Register 0 (CR0) bit assignments (continued)

| CR0 bit | Function | Settings (Binary) |
|---------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [3] | Fixed latency enable | <p>0 - Reserved 1 - Fixed 2 times initial latency (default)</p> <p>The 128-Mb dual-die stack only supports fixed latency. In fixed latency mode, when CS# asserted LOW,</p> <ol style="list-style-type: none"> 1. The RWDS signal of each die of dual-die 128-Mb will always drive to HIGH during CA phase. 2. The RWDS signal of the non-selected die of dual-die 128-Mb will always drive to Hi-Z after CA phase. 3. The RWDS signal of the selected die of dual-die 128-Mb will drive to L after CA phase. |
| [2] | Hybrid burst enable | <p>0: Wrapped burst sequence to follow hybrid burst sequencing 1: Wrapped burst sequence in legacy wrapped burst manner (default)</p> <p>This bit setting is effective only when the “burst type” bit in the command/address register is set to ‘0’, i.e. CA[45] = ‘0’; otherwise, it is ignored.</p> |
| [1:0] | Burst length | <p>00 - 128 bytes 01 - 64 bytes 10 - 16 bytes 11 - 32 bytes (default)</p> |

6.3.1.1 Wrapped burst

A wrapped burst transaction accesses memory within a group of words aligned on a word boundary matching the length of the configured group. Wrapped access groups can be configured as 16, 32, 64, or 128 bytes alignment and length. During wrapped transactions, access starts at the CA selected location within the group, continues to the end of the configured word group aligned boundary, then wraps around to the beginning location in the group, then continues back to the starting location. Wrapped bursts are generally used for critical word first instruction or data cache line fill read accesses. Wrapped burst across die boundary is not supported.

6.3.1.2 Hybrid burst

The beginning of a hybrid burst will wrap within the target address wrapped burst group length before continuing to the next half-page of data beyond the end of the wrap group. Continued access is in linear burst order until the transfer is ended by returning CS# HIGH. This hybrid of a wrapped burst followed by a linear burst starting at the beginning of the next burst group, allows multiple sequential address cache lines to be filled in a single access. The first cache line is filled starting at the critical word. Then the next sequential line in memory can be read in to the cache while the first line is being processed. Hybrid burst across die boundary is not supported.

Table 11 CR0[2] control of wrapped burst sequence

| Bit | Default value | Setting details |
|--------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CR0[2] | 1b | <p>Hybrid burst enable</p> <p>CR0[2] = 0: Wrapped burst sequence to follow hybrid burst sequencing</p> <p>CR0[2] = 1: Wrapped burst sequence in legacy wrapped burst manner</p> |

Register space access

Table 12 Example wrapped burst sequences (Addressing)

| Burst type | Wrap boundary (Bytes) | Start address (Hex) | Sequence of byte addresses (hex) of data words |
|------------|---------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hybrid 128 | 128 wrap once then linear | XXXXXX03 | 03, 04, 05, 06, 07, 08, 09, 0A, 0B, 0C, 0D, 0E, 0F, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 1A, 1B, 1C, 1D, 1E, 1F, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 2A, 2B, 2C, 2D, 2E, 2F, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 3A, 3B, 3C, 3D, 3E, 3F, 00, 01, 02 (wrap complete, now linear beyond the end of the initial 128 byte wrap group) 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 4A, 4B, 4C, 4D, 4E, 4F, 50, 51, ... |
| Hybrid 64 | 64 wrap once then linear | XXXXXX02 | 02, 04, 06, 08, 0A, 0C, 0E, 10, 12, 14, 16, 18, 1A, 1C, 1E, 20, 22, 24, 26, 28, 2A, 2C, 2E, 30, 32, 34, 36, 38, 3A, 3C, 3E, 00 (wrap complete, now linear beyond the end of the initial 64 byte wrap group) 40, 42, 44, 46, 48, 4A, 4C, 4E, 50, 52, ... |
| Hybrid 64 | 64 wrap once then linear | XXXXXX2E | 2E, 30, 32, 34, 36, 38, 3A, 3C, 3E, 00, 02, 04, 06, 08, 0A, 0C, 0E, 10, 12, 14, 16, 18, 1A, 1C, 1E, 20, 22, 24, 26, 28, 2A, 2C (wrap complete, now linear beyond the end of the initial 64 byte wrap group) 40, 42, 44, 46, 48, 4A, 4B, 4C, 4D, 4E, 4F, 50, 52, ... |
| Hybrid 16 | 16 wrap once then linear | XXXXXX02 | 02, 04, 06, 08, 0A, 0C, 0E, 00 (wrap complete, now linear beyond the end of the initial 16 byte wrap group) 10, 12, 14, 16, 18, 1A, .. |
| Hybrid 16 | 16 wrap once then linear | XXXXXX0C | 0C, 0E, 00, 02, 04, 06, 08, 0A (wrap complete, now linear beyond the end of the initial 16 byte wrap group) 10, 12, 14, 16, 18, 1A, ... |
| Hybrid 32 | 32 wrap once then linear | XXXXXX0A | 0A, 0C, 0E, 10, 12, 14, 16, 18, 1A, 1C, 1E, 00, 02, 04, 06, 08 (wrap complete, now linear beyond the end of the initial 32 byte wrap group) 20, 22, 24, 26, 28, 2A, ... |
| Wrap 64 | 64 | XXXXXX02 | 02, 04, 06, 08, 0A, 0C, 0E, 10, 12, 14, 16, 18, 1A, 1C, 1E, 20, 22, 24, 26, 28, 2A, 2C, 2E, 30, 32, 34, 36, 38, 3A, 3C, 3E, 00, ... |
| Wrap 64 | 64 | XXXXXX2E | 2E, 30, 32, 34, 36, 38, 3A, 3C, 3E, 00, 02, 04, 06, 08, 0A, 0C, 0E, 10, 12, 14, 16, 18, 1A, 1C, 1E, 20, 22, 24, 26, 28, 2A, 2C, 2E, 30, |
| Wrap 16 | 16 | XXXXXX02 | 02, 04, 06, 08, 0A, 0C, 0E, 00, ... |
| Wrap 16 | 16 | XXXXXX0C | 0C, 0E, 00, 02, 04, 06, 08, 0A, ... |
| Wrap 32 | 32 | XXXXXX0A | 0A, 0C, 0E, 10, 12, 14, 16, 18, 1A, 1C, 1E, 00, 02, 04, 06, 08, ... |
| Linear | Linear burst | XXXXXX02 | 02, 04, 06, 08, 0A, 0C, 0E, 10, 12, 14, 16, 18, 1A, 1C, 1E, 20, 22, ... |

6.3.1.3 Initial latency

Memory space read and write transactions or register space read transactions require some initial latency to open the row selected by the CA. This initial latency is t_{ACC} . The number of latency clocks needed to satisfy t_{ACC} depends on the clock input frequency can vary from 3 to 7 clocks. The value in CR0[7:4] selects the number of clocks for initial latency. The default value is 7 clocks, allowing for operation up to a maximum frequency of 200 MHz prior to the host system setting a lower initial latency value that may be more optimal for the system.

In the event a distributed refresh is required at the time a memory space read or write transaction or register space read transaction begins, the RWDS signal goes High during the CA to indicate that an additional initial latency is being inserted to allow a refresh operation to complete before opening the selected row.

Register space write transactions always have zero initial latency. RWDS may be HIGH or LOW during the CA period. The level of RWDS during the CA period does not affect the placement of register data immediately after the CA, as there is no initial latency needed to capture the register data. A refresh operation may be performed in the memory array in parallel with the capture of register data.

6.3.1.4 Fixed latency

A Configuration Register Option Bit CR0[3] is provided to make all memory space read and write transactions or register space read transactions require the same initial latency by always driving RWDS HIGH during the CA to indicate that two initial latency periods are required. This fixed initial latency is independent of any need for a distributed refresh, it simply provides a fixed (deterministic) initial latency for all of these transaction types. Fixed latency is the default POR or reset configuration.

6.3.1.5 Drive strength

DQ and RWDS signal line loading, length, and impedance vary depending on each system design. Configuration Register Bits CR0[14:12] provide a means to adjust the DQ[7:0] and RWDS signal output impedance to customize the DQ and RWDS signal impedance to the system conditions to minimize high speed signal behaviors such as overshoot, undershoot, and ringing. The default POR or reset configuration value is 000b to select the mid point of the available output impedance options.

The impedance values shown are typical for both pull-up and pull-down drivers at typical silicon process conditions, nominal operating voltage (1.8 V or 3.0 V) and 50°C. The impedance values may vary from the typical values depending on the process, voltage, and temperature (PVT) conditions. Impedance will increase with slower process, lower voltage, or higher temperature. Impedance will decrease with faster process, higher voltage, or lower temperature.

Each system design should evaluate the data signal integrity across the operating voltage and temperature ranges to select the best drive strength settings for the operating conditions.

6.3.1.6 Deep power down

When the HYPERRAM™ device is not needed for system operation, it may be placed in a very low power consuming state called deep power down (DPD), by writing 0 to CR0[15]. When CR0[15] is cleared to 0, the device enters the DPD state within t_{DPDIN} time and all refresh operations stop. The data in RAM is lost, (becomes invalid without refresh) during DPD state. Exiting DPD requires driving CS# LOW then HIGH, POR, or a reset. Only CS# and RESET# signals are monitored during DPD mode. For additional details, see “[Deep power down](#)” on page 33.

Note: The 128-Mb HYPERRAM™ is a stacked-die chip using two 64-Mb dice. Of the two dice, only one die at a time can be programmed to enter the DPD mode. It is not feasible to program both the dice to enter the DPD mode together because entering the DPD mode for one die would require CS# HIGH to LOW transition which would cause to exit the DPD mode in the other die, and vice versa.

Register space access

6.3.2 Configuration Register 1

Configuration Register 1 (CR1) is used to define the refresh array size, refresh rate and hybrid sleep for the HYPERRAM™ device. Configurable characteristics include:

- Partial array refresh
- Hybrid sleep state
- Refresh rate

Table 13 Configuration Register 1 (CR1) bit assignments

| CR1 bit | Function | Setting (binary) |
|---------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [15:8] | Reserved | FFh - Reserved (default) These bits should always be set to FFh |
| [7] | Burst type | 1 - Linear burst (default) 0 - Wrapped burst |
| [6] | Master clock type | 1 - Single ended - CK (default) 0 - Differential - CK#, CK |
| [5] | Hybrid sleep | 1 - Causes the device to enter hybrid sleep state 0 - Normal operation (default) Only one die of the 128-Mb stack-die HYPERRAM™ can be programmed to enter hybrid sleep mode at a time. |
| [4:2] | Partial array refresh | 000 - Full array (default) 001 - Bottom 1/2 array 010 - Bottom 1/4 array 011 - Bottom 1/8 array 100 - None 101 - Top 1/2 array 110 - Top 1/4 array 111 - Top 1/8 array |
| [1:0] | Distributed refresh interval (read only) | 10 - 1 μ s t_{CSM} (Industrial Plus temperature range devices) 11 - Reserved 00 - Reserved 01 - 4 μ s t_{CSM} (Industrial temperature range devices) |

6.3.2.1 Burst type

Two burst types, namely linear and wrapped, are supported in xSPI (Octal) mode by HYPERRAM™. CR1[7] selects which type to use.

6.3.2.2 Master clock type

Two clock types, namely single ended and differential, are supported. CR1[6] selects which type to use.

- In the single ended clock mode (by default), CK# input is not enabled; hence it may be left either floating or biased to HIGH or LOW.
- In the differential clock mode (when enabled), the CK# input can't be left floating. It must be either driven by the host, or biased to HIGH or LOW.

6.3.2.3 Partial array refresh

The partial array refresh configuration restricts the refresh operation in HYPERRAM™ to a portion of the memory array specified by CR1[5:3]. This reduces the standby current. The default configuration refreshes the whole array.

6.3.2.4 Hybrid sleep (HS)

When the HYPERRAM™ is not needed for system operation but data in the device needs to be retained, it may be placed in hybrid sleep state to save more power. Enter hybrid sleep state by writing 1 to CR1[5]. Bringing CS# LOW will cause the device to exit HS state and set CR1[5] to 0. Also, POR, or a hardware reset will cause the device to exit hybrid sleep state. Note that a POR or a hardware reset disables refresh where the memory core data can potentially get lost.

Note: The 128-Mb HYPERRAM™ is a stacked-die chip using two 64-Mb dice. Of the two dice, only one die at a time can be programmed to enter the HS mode. It is not feasible to program both the dice to enter the HS mode together because entering the HS mode for one die would require CS# HIGH to LOW transition which would cause to exit the HS mode in the other die, and vice versa.

6.3.2.5 Distributed refresh interval

The DRAM array requires periodic refresh of all bits in the array. This can be done by the host system by reading or writing a location in each row within a specified time limit. The read or write access copies a row of bits to an internal buffer. At the end of the access the bits in the buffer are written back to the row in memory, thereby recharging (refreshing) the bits in the row of DRAM memory cells.

HYPERRAM™ devices include self-refresh logic that will refresh rows automatically. The automatic refresh of a row can only be done when the memory is not being actively read or written by the host system. The refresh logic waits for the end of any active read or write before doing a refresh, if a refresh is needed at that time. If a new read or write begins before the refresh is completed, the memory will drive RWDS HIGH during the CA period to indicate that 2X initial latency time is required at the start of the new access in order to allow the refresh operation to complete before starting the new access.

The required refresh interval for the entire memory array varies with temperature as shown in [Table 14](#). This is the time within which all rows must be refreshed. Refresh of all rows could be done as a single batch of accesses at the beginning of each interval, in groups (burst refresh) of several rows at a time, spread throughout each interval, or as single row refreshes evenly distributed throughout the interval. The self-refresh logic distributes single row refresh operations throughout the interval so that the memory is not busy doing a burst of refresh operations for a long period, such that the burst refresh would delay host access for a long period.

Table 14 Array refresh interval per temperature

| Device temperature (°C) | Array refresh interval (ms) | Array rows | Recommended t_{CSM} (μs) |
|-------------------------|-----------------------------|------------|----------------------------|
| 85 | 64 | 8192 | 4 |
| 105 | 16 | 8192 | 1 |
| 105 | 16 | 8192 | 1 |

The distributed refresh method requires that the host does not do burst transactions that are so long as to prevent the memory from doing the distributed refreshes when they are needed. This sets an upper limit on the length of read and write transactions so that the refresh logic can insert a refresh between transactions. This limit is called the CS# LOW maximum time (t_{CSM}). The t_{CSM} value is determined by the array refresh interval divided by the number of rows in the array, then reducing this calculation by half to ensure that a distributed refresh interval cannot be entirely missed by a maximum length host access starting immediately before a distributed refresh is needed. Because t_{CSM} is set to half the required distributed refresh interval, any series of maximum length host accesses that delay refresh operations will catch up on refresh operations at twice the rate required by the refresh interval divided by the number of rows.

The host system is required to respect the t_{CSM} value by ending each transaction before violating t_{CSM} . This can be done by host memory controller logic splitting long transactions when reaching the t_{CSM} limit, or by host system hardware or software not performing a single read or write transaction that would be longer than t_{CSM} .

As noted in [Table 14](#) the array refresh interval is longer at lower temperatures such that t_{CSM} could be increased to allow longer transactions. The host system can either use the t_{CSM} value from the table for the maximum operating temperature or, may determine it dynamically by reading the read only CR1[1:0] bits in order to set the distributed refresh interval prior to every access.

Interface states

7 Interface states

Table 15 describes the required value of each signal for each interface state.

Table 15 Interface states

| Interface state | V_{CC} / V_{CCQ} | CS# | CK, CK# | DQ7-DQ0 | RWDS | RESET# |
|-------------------------------------------------------------|-----------------------------|-----|---------|----------------------------------------|----------------------------|--------|
| Power-off | $< V_{LKO}$ | X | X | HIGH-Z | HIGH-Z | X |
| Power-on (cold) reset | $\geq V_{CC} / V_{CCQ}$ min | X | X | HIGH-Z | HIGH-Z | X |
| Hardware (warm) reset | $\geq V_{CC} / V_{CCQ}$ min | X | X | HIGH-Z | HIGH-Z | L |
| Interface standby | $\geq V_{CC} / V_{CCQ}$ min | H | X | HIGH-Z | HIGH-Z | H |
| CA | $\geq V_{CC} / V_{CCQ}$ min | L | T | Master output valid | Y | H |
| Read initial access latency (data bus turn around period) | $\geq V_{CC} / V_{CCQ}$ min | L | T | HIGH-Z | L | H |
| Write initial access latency (RWDS turn around period) | $\geq V_{CC} / V_{CCQ}$ min | L | T | HIGH-Z | HIGH-Z | H |
| Read data transfer | $\geq V_{CC} / V_{CCQ}$ min | L | T | Slave output valid | Slave output valid Z or T | H |
| Write data transfer with initial latency | $\geq V_{CC} / V_{CCQ}$ min | L | T | Master output valid | Master output valid X or T | H |
| Write data transfer without initial latency ^[26] | $\geq V_{CC} / V_{CCQ}$ min | L | T | Master output valid | Slave output L or HIGH-Z | H |
| Active clock stop ^[27] | $\geq V_{CC} / V_{CCQ}$ min | L | Idle | Master or slave output valid or HIGH-Z | Y | H |
| Deep power down ^[27] | $\geq V_{CC} / V_{CCQ}$ min | H | X or T | HIGH-Z | HIGH-Z | H |
| Hybrid sleep ^[27] | $\geq V_{CC} / V_{CCQ}$ min | H | X or T | HIGH-Z | HIGH-Z | H |

Legend

L = V_{IL}

H = V_{IH}

X = either V_{IL} or V_{IH}

Y = either V_{IL} or V_{IH} or V_{OL} or V_{OH}

Z = either V_{OL} or V_{OH}

L/H = rising edge

H/L = falling edge

T = Toggling during information transfer

Idle = CK is LOW and CK# is HIGH

Valid = all bus signals have stable L or H level

Notes

26. Writes without initial latency (with zero initial latency), do not have a turn around period for RWDS. The HYPERRAM™ device will always drive RWDS during the CA period to indicate whether extended latency is required. Since master write data immediately follows the CA period the HYPERRAM™ device may continue to drive RWDS LOW or may take RWDS to HIGH-Z. The master must not drive RWDS during Writes with zero latency. Writes with zero latency do not use RWDS as a data mask function. All bytes of write data are written (full word writes).
27. Active clock stop is described in “**Active clock stop**” on page 31, DPD is described in “**Deep power down**” on page 33, and hybrid sleep is described in “**Hybrid sleep**” on page 32.

Power conservation modes

8 Power conservation modes

8.1 Interface standby

Standby is the default, low power, state for the interface while the device is not selected by the host for data transfer (CS# = HIGH). All inputs, and outputs other than CS# and RESET# are ignored in this state.

8.2 Active clock stop

Design note: Active Clock Stop feature is pending device characterization to determine if it will be supported.

The active clock stop state reduces device interface energy consumption to the I_{CC6} level during the data transfer portion of a read or write operation. The device automatically enables this state when clock remains stable for $t_{ACC} + 30$ ns. While in active clock stop state, read data is latched and always driven onto the data bus. I_{CC6} shown in [“DC characteristics”](#) on page 36.

Active clock stop state helps reduce current consumption when the host system clock has stopped to pause the data transfer. Even though CS# may be LOW throughout these extended data transfer cycles, the memory device host interface will go into the active clock stop current level at $t_{ACC} + 30$ ns. This allows the device to transition into a lower current state if the data transfer is stalled. Active read or write current will resume once the data transfer is restarted with a toggling clock. The active clock stop state must not be used in violation of the t_{CSM} limit. CS# must go HIGH before t_{CSM} is violated. Clock can be stopped during any portion of the active transaction as long as it is in the LOW state. Note that it is recommended to avoid stopping the clock during register access.

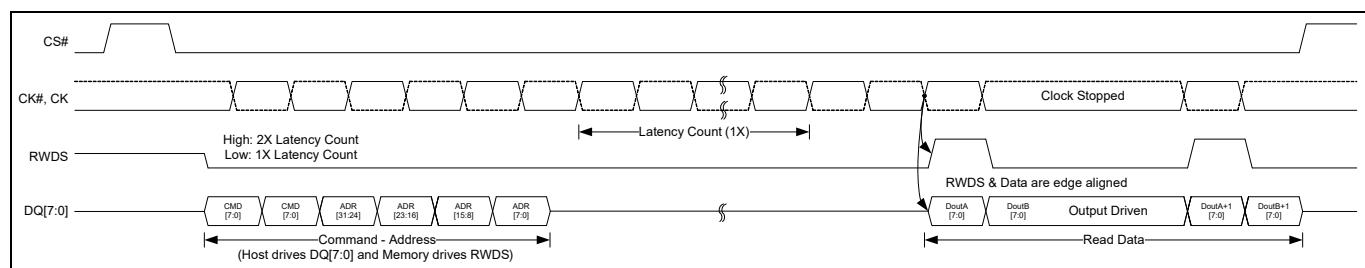


Figure 16 Active clock stop during read transaction (DDR)

Power conservation modes

8.3 Hybrid sleep

In the hybrid sleep (HS) state, the current consumption is reduced (I_{HS}). HS state is entered by writing a 0 to CR1[5]. The device reduces power within t_{HSIN} time. The data in memory space and register space is retained during HS state. Bringing CS# LOW will cause the device to exit HS state and set CR1[5] to 1. Also, POR, or a hardware reset will cause the device to exit hybrid sleep state. Note that a POR or a hardware reset disables refresh where the memory core data can potentially get lost. Returning to standby state requires t_{EXTHS} time. Following the exit from HS due to any of these events, the device is in the same state as entering hybrid sleep.

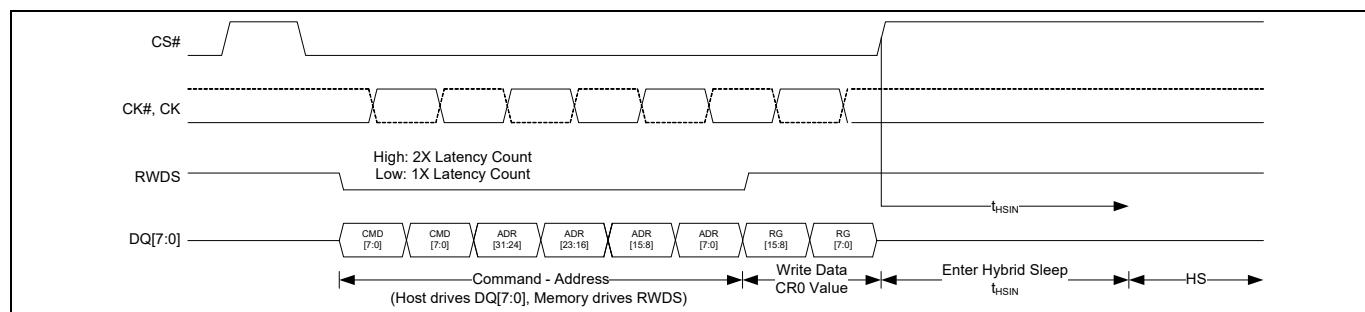


Figure 17 Enter HS transaction^[28]

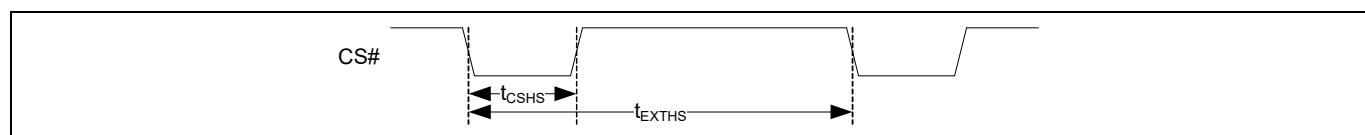


Figure 18 Exit HS transaction

Table 16 Hybrid sleep timing parameters

| Parameter | Description | Min | Max | Unit |
|-------------|----------------------------------------------------------|-----|------|------|
| t_{HSIN} | Hybrid sleep CR1[5] = 1 register write to HS power level | – | 3 | μs |
| t_{CSNS} | CS# pulse width to exit HS | 60 | 3000 | ns |
| t_{EXTHS} | CS# exit hybrid sleep to standby wakeup time | – | 100 | μs |

Note

28.The initial latency “low = 1x latency count” is not applicable in dual-die, 128-Mb HYPERRAM™. Write with no latency transaction is used for register writes only.

Power conservation modes

8.4 Deep power down

In the deep power down (DPD) state, current consumption is driven to the lowest possible level (I_{DPD}). DPD state is entered by writing a 0 to CR0[15]. The device reduces power within t_{DPDIN} time and all refresh operations stop. The data in memory space is lost, (becomes invalid without refresh) during DPD state. Driving CS# LOW then HIGH will cause the device to exit DPD state. Also, POR, or a hardware reset will cause the device to exit DPD state. Returning to standby state requires t_{EXTDPD} time. Returning to standby state following a POR requires t_{VCS} time, as with any other POR. Following the exit from DPD due to any of these events, the device is in the same state as following POR.

Note In xSPI (Octal), deep power down transaction or write any register transaction can be used to enter DPD.

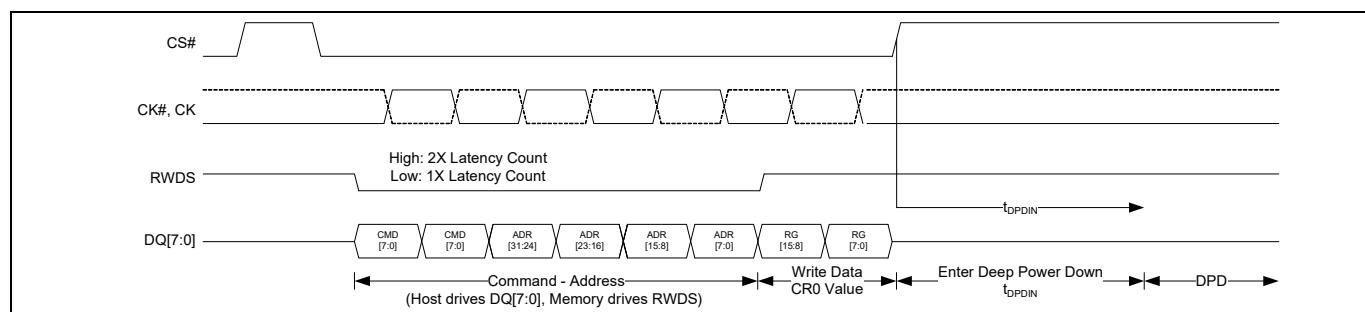


Figure 19 Enter DPD transaction^[29]



Figure 20 Exit DPD transaction

Table 17 Deep power down timing parameters

| Parameter | Description | Min | Max | Unit |
|--------------|---------------------------------------------------------------|-----|------|---------|
| t_{DPDIN} | Deep power down CR0[15] = 0 register write to DPD power level | – | 3 | μ s |
| t_{CSDPD} | CS# pulse width to exit DPD | 200 | 3000 | ns |
| t_{EXTDPD} | CS# exit deep power down to standby wakeup time | – | 150 | μ s |

Note

29. The initial latency “low = 1x latency count” is not applicable in dual-die, 128-Mb HYPERRAM™. Write with no latency transaction is used for register writes only.

Electrical specifications

9 Electrical specifications

9.1 Absolute maximum ratings

| | |
|---------------------------------------------------------------|--------------------------------------|
| Storage temperature plastic packages | -65°C to +150°C |
| Ambient temperature with power applied | -65°C to +115°C |
| Voltage with respect to ground All signals ^[31] | -0.5 V to +(V _{CC} + 0.5 V) |
| Output short circuit current ^[32] | 100 mA |
| V _{CC} , V _{CCQ} | -0.5 V to +4.0 V |

9.2 Input signal overshoot

During DC conditions, input or I/O signals should remain equal to or between V_{SS} and V_{CC}. During voltage transitions, inputs or I/Os may negative overshoot V_{SS} to -1.0 V or positive overshoot to V_{CC} + 1.0 V, for periods up to 20 ns.

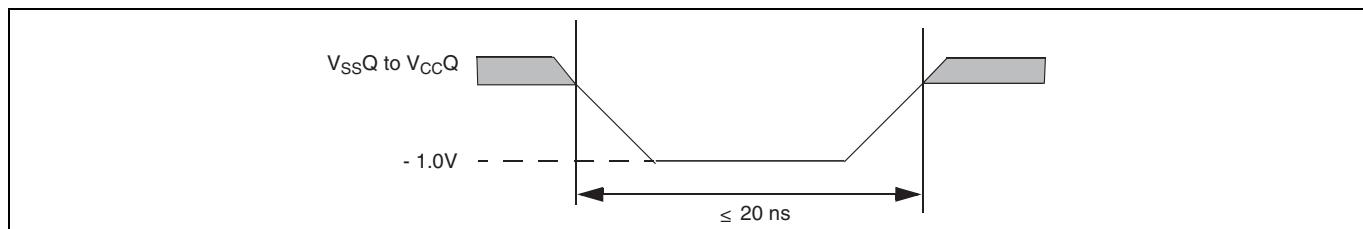


Figure 21 Maximum negative overshoot waveform

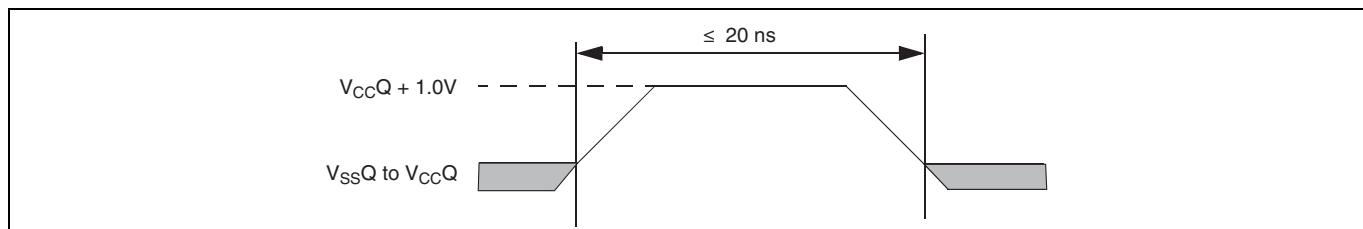


Figure 22 Maximum positive overshoot waveform

Notes

30. Stresses above those listed under **Absolute maximum ratings** may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational sections of this data sheet is not implied. Exposure of the device to absolute maximum rating conditions for extended periods may affect device reliability.
31. Minimum DC voltage on input or I/O signal is -1.0 V. During voltage transitions, input or I/O signals may undershoot V_{SS} to -1.0V for periods of up to 20 ns. See [Figure 21](#). Maximum DC voltage on input or I/O signals is V_{CC} + 1.0 V. During voltage transitions, input or I/O signals may overshoot to V_{CC} + 1.0 V for periods up to 20 ns. See [Figure 22](#).
32. No more than one output may be shorted to ground at a time. Duration of the short circuit should not be greater than one second.

Electrical specifications

9.3 Latch-up characteristics

Table 18 Latch-up specification^[33]

| Description | Min | Max | Unit |
|-----------------------------------------------------------------------|------|-----------------|------|
| Input voltage with respect to V_{SSQ} on all input only connections | -1.0 | $V_{CCQ} + 1.0$ | V |
| Input voltage with respect to V_{SSQ} on all I/O connections | | | |
| V_{CCQ} Current | -100 | +100 | mA |

9.4 Operating ranges

Operating ranges define those limits between which the functionality of the device is guaranteed.

9.4.1 Temperature ranges

Table 19 Temperature ranges

| Parameter | Symbol | Device | Spec | | Unit |
|---------------------|--------|----------------------------------|------|-----|------|
| | | | Min | Max | |
| Ambient temperature | T_A | Industrial (I) | -40 | 85 | °C |
| | | Industrial Plus (V) | | 105 | |
| | | Automotive, AEC-Q100 Grade 3 (A) | | 85 | |
| | | Automotive, AEC-Q100 Grade 2 (B) | | 105 | |

9.4.2 Power supply voltages

Table 20 Power supply voltages

| Description | Min | Max | Unit |
|-----------------------------|-----|-----|------|
| 1.8 V V_{CC} power supply | 1.7 | 2.0 | V |
| 3.0 V V_{CC} power supply | 2.7 | 3.6 | |
| | 2.7 | 3.6 | |

Note

33.Excludes power supplies V_{CC}/V_{CCQ} . Test conditions: $V_{CC} = V_{CCQ}$, one connection at a time tested, connections not being tested are at V_{SS} .

Electrical specifications

9.5 DC characteristics

Table 21 DC characteristics (CMOS compatible)

| Parameter | Description | Test conditions | 128 Mb | | | Unit |
|------------|--------------------------------------------------------------------------------|----------------------------------------------------------|--------|---------------------|-----|------|
| | | | Min | Typ ^[34] | Max | |
| I_{LI1} | Input leakage current 3.0 V device reset signal high only | $V_{IN} = V_{SS}$ to V_{CC} , $V_{CC} = V_{CC}$ max | - | - | 4 | μA |
| I_{LI2} | Input leakage current 1.8 V device reset signal high only | $V_{IN} = V_{SS}$ to V_{CC} , $V_{CC} = V_{CC}$ max | | | 4 | |
| I_{LI3} | Input leakage current 3.0 V device reset signal low only ^[35] | $V_{IN} = V_{SS}$ to V_{CC} , $V_{CC} = V_{CC}$ max | | | 30 | |
| I_{LI4} | Input leakage current 1.8 V device reset signal low only ^[35] | $V_{IN} = V_{SS}$ to V_{CC} , $V_{CC} = V_{CC}$ max | | | 30 | |
| I_{CC1} | V_{CC} active read current | $CS\# = V_{IL}$, @ 200 MHz, $V_{CC} = 2.0$ V | 30 | 50 | mA | |
| | | $CS\# = V_{IL}$, @ 166 MHz, $V_{CC} = 3.6$ V | | 56 | | |
| | | $CS\# = V_{SS}$, @ 200 MHz, $V_{CC} = 3.6$ V | | 60 | | |
| I_{CC2} | V_{CC} active write current | $CS\# = V_{IL}$, @ 200 MHz, $V_{CC} = 2.0$ V | - | 50 | | |
| | | $CS\# = V_{IL}$, @ 166 MHz, $V_{CC} = 3.6$ V | | 56 | | |
| | | $CS\# = V_{SS}$, @ 200 MHz, $V_{CC} = 3.6$ V | | 60 | | |
| I_{CC4I} | V_{CC} standby current (-40°C to +85°C) | $CS\# = V_{CC}$, $V_{CC} = 2.0$ V; full array | - | 160 | 440 | μA |
| | | $CS\# = V_{CC}$, $V_{CC} = 2.0$ V; bottom 1/2 array | | 420 | 420 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 2.0$ V; bottom 1/4 array | | 410 | 410 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 2.0$ V; bottom 1/8 array | | 400 | 400 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 2.0$ V; top 1/2 array | | 420 | 420 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 2.0$ V; top 1/4 array | | 410 | 410 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 2.0$ V; top 1/8 array | | 400 | 400 | |
| | V_{CC} standby current (-40°C to +85°C) | $CS\# = V_{CC}$, $V_{CC} = 3.6$ V; full array | - | 180 | 500 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 3.6$ V; bottom 1/2 array | | 480 | 480 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 3.6$ V; bottom 1/4 array | | 450 | 450 | |
| | | $CS\# = V_{CC}$, $V_{CC} = 3.6$ V; bottom 1/8 array | | 440 | 440 | |

Notes

34. Not 100% tested.

35. Only one of the two-die 128 Mb chip can enter DPD mode, while the other die remains in standby mode. RESET# LOW initiates exits from DPD state and initiates the draw of ICC5 reset current, making ILI during RESET# LOW insignificant.

Table 21 DC characteristics (CMOS compatible) (continued)

| Parameter | Description | Test conditions | 128 Mb | | | Unit |
|--------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------|---------------------|-----|------|
| | | | Min | Typ ^[34] | Max | |
| I _{CC4I} | V _{CC} standby current (-40°C to +85°C) | CS# = V _{CC} , V _{CC} = 3.6 V; top 1/2 array | - | - | 480 | μA |
| | | CS# = V _{CC} , V _{CC} = 3.6 V; top 1/4 array | | | 450 | |
| | | CS# = V _{CC} , V _{CC} = 3.6 V; top 1/8 array | | | 440 | |
| I _{CC4P} | V _{CC} standby current (-40°C to +105°C) | CS# = V _{CC} , V _{CC} = 2.0 V; full array | - | 160 | 660 | μA |
| | | CS# = V _{CC} , V _{CC} = 2.0 V; bottom 1/2 array | | - | 630 | |
| | | CS# = V _{CC} , V _{CC} = 2.0 V; bottom 1/4 array | | | 615 | |
| | | CS# = V _{CC} , V _{CC} = 2.0 V; bottom 1/8 array | | | 600 | |
| | | CS# = V _{CC} , V _{CC} = 2.0 V; top 1/2 array | | - | 630 | |
| | | CS# = V _{CC} , V _{CC} = 2.0 V; top 1/4 array | | | 615 | |
| | | CS# = V _{CC} , V _{CC} = 2.0 V; top 1/8 array | | | 600 | |
| | | CS# = V _{CC} , V _{CC} = 3.6 V; full array | | 180 | 750 | |
| | | CS# = V _{CC} , V _{CC} = 3.6 V; bottom 1/2 array | | - | 720 | |
| | | CS# = V _{CC} , V _{CC} = 3.6 V; bottom 1/4 array | | | 675 | |
| | | CS# = V _{CC} , V _{CC} = 3.6 V; bottom 1/8 array | | | 660 | |
| I _{CC5} | Reset current | CS# = V _{IH} , RESET# = V _{IL} , V _{CC} = V _{CC} max | - | 1.5 | mA | |
| | | | | | | |
| I _{CC6I} | Active clock stop current (-40°C to +85°C) | CS# = V _{IL} , RESET# = V _{IH} , V _{CC} = V _{CC} max | 10 | 13 | | |
| I _{CC6IP} | Active clock stop current (-40°C to +105°C) | CS# = V _{IL} , RESET# = V _{IH} , V _{CC} = V _{CC} max | | 19 | | |
| I _{CC7} | V _{CC} current during power up ^[34] | CS# = V _{IH} , V _{CC} = V _{CC} max, V _{CC} = V _{CCQ} = 2.0 V or 3.6 V | - | 70 | | |

Notes

34. Not 100% tested.

35. Only one of the two-die 128 Mb chip can enter DPD mode, while the other die remains in standby mode. RESET# LOW initiates exit from DPD state and initiates the draw of ICC5 reset current, making ILI during RESET# LOW insignificant.

Table 21 DC characteristics (CMOS compatible) (continued)

| Parameter | Description | Test conditions | 128 Mb | | | Unit |
|------------------|------------------------------------------------------|-------------------------------------------------------|--------|---------------------|-----|------|
| | | | Min | Typ ^[34] | Max | |
| $I_{DPD}^{[35]}$ | Deep power down current (-40°C to +85°C) | $CS\# = V_{IH}, V_{CC} = V_{CC\ max}$ | | | 250 | |
| $I_{DPD}^{[35]}$ | Deep power down current 3.0 V (-40 °C to +85 °C) | $CS\# = V_{IH}, V_{CC} = 3.6\ V$ | | | 220 | |
| $I_{DPD}^{[35]}$ | Deep power down current (-40°C to +105°C) | $CS\# = V_{IH}, V_{CC} = V_{CC\ max}$ | | | 330 | |
| $I_{DPD}^{[35]}$ | Deep power down current 3.0 V (-40 °C to +105 °C) | $CS\# = V_{IH}, V_{CC} = 3.6\ V$ | | | 360 | |
| $I_{HS}^{[35]}$ | Hybrid sleep current (-40°C to +85°C) | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ full array | | 105 | 420 | μA |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ bottom 1/2 array | | | 370 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ bottom 1/4 array | | | 330 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ bottom 1/8 array | | | 310 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ top 1/2 array | | | 370 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ top 1/4 array | | | 330 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ top 1/8 array | | | 310 | |
| | | $CS\# = V_{CC}, V_{CC} = 3.6\ V;$ full array | | 115 | 480 | |
| | | $CS\# = V_{CC}, V_{CC} = 3.6\ V;$ bottom 1/2 array | | | 430 | |
| | | $CS\# = V_{CC}, V_{CC} = 3.6\ V;$ bottom 1/4 array | | | 370 | |
| | | $CS\# = V_{CC}, V_{CC} = 3.6\ V;$ bottom 1/8 array | | | 340 | |
| | | $CS\# = V_{CC}, V_{CC} = 3.6\ V;$ top 1/2 array | | | 430 | |
| | | $CS\# = V_{CC}, V_{CC} = 3.6\ V;$ top 1/4 array | | | 370 | |
| | | $CS\# = V_{CC}, V_{CC} = 3.6\ V;$ top 1/8 array | | | 340 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ full array | | 185 | 630 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ bottom 1/2 array | | | 570 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ bottom 1/4 array | | | 510 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ bottom 1/8 array | | | 460 | |
| | | $CS\# = V_{CC}, V_{CC} = 2.0\ V;$ top 1/2 array | | | 570 | |

Notes

34. Not 100% tested.

35. Only one of the two-die 128 Mb chip can enter DPD mode, while the other die remains in standby mode. RESET# LOW initiates exits from DPD state and initiates the draw of ICC5 reset current, making ILI during RESET# LOW insignificant.

Electrical specifications

Table 21 DC characteristics (CMOS compatible) (continued)

| Parameter | Description | Test conditions | 128 Mb | | | Unit |
|-----------------|-------------------------------------------|--------------------------------------------------------|------------------------|-----------------------|-----|---------|
| | | | Min | Typ ^[34] | Max | |
| $I_{HS}^{[35]}$ | Hybrid sleep current (-40°C to +85°C) | CS# = V_{CC} , $V_{CC} = 2.0$ V; top 1/4 array | - | - | 510 | μA |
| | | CS# = V_{CC} , $V_{CC} = 2.0$ V; top 1/8 array | | - | 460 | |
| | Hybrid sleep current (-40°C to +105°C) | CS# = V_{CC} , $V_{CC} = 3.6$ V; full array | | 215 | 690 | |
| | | CS# = V_{CC} , $V_{CC} = 3.6$ V; bottom 1/2 array | | - | 630 | |
| | | CS# = V_{CC} , $V_{CC} = 3.6$ V; bottom 1/4 array | | - | 550 | |
| | | CS# = V_{CC} , $V_{CC} = 3.6$ V; bottom 1/8 array | | - | 520 | |
| | | CS# = V_{CC} , $V_{CC} = 3.6$ V; top 1/2 array | | - | 630 | |
| | | CS# = V_{CC} , $V_{CC} = 3.6$ V; top 1/4 array | | - | 550 | |
| | | CS# = V_{CC} , $V_{CC} = 3.6$ V; top 1/8 array | | - | 520 | |
| V_{IL} | Input low voltage | - | -0.15 $\times V_{CCQ}$ | 0.35 $\times V_{CCQ}$ | V | |
| V_{IH} | Input high voltage | | | | | |
| V_{OL} | Output low voltage | $I_{OL} = 100 \mu A$ for DQ[7:0] | - | | | |
| V_{OH} | Output high voltage | $I_{OH} = 100 \mu A$ for DQ[7:0] | $V_{CCQ} - 0.20$ | | | |

Notes

34. Not 100% tested.

35. Only one of the two-die 128 Mb chip can enter DPD mode, while the other die remains in standby mode. RESET# LOW initiates exits from DPD state and initiates the draw of ICC5 reset current, making ILI during RESET# LOW insignificant.

Electrical specifications

9.5.1 Capacitance characteristics

Table 22 1.8 V capacitive characteristics^[36, 37, 38]

| Description | Parameter | 128 Mb | Unit |
|-----------------------------------|-----------|---------------|------|
| | | Max | |
| Input capacitance (CK, CK#, CS#) | CI | 6 | pF |
| Delta input capacitance (CK, CK#) | CID | 0.50 | |
| Output capacitance (RWDS) | CO | 6 | |
| IO capacitance (DQx) | CIO | 6 | |
| IO capacitance delta (DQx) | CIOD | 0.50 | |

Table 23 3.0 V capacitive characteristics^[36, 37, 38]

| Description | Parameter | 128 Mb | Unit |
|-----------------------------------|-----------|---------------|------|
| | | Max | |
| Input capacitance (CK, CK#, CS#) | CI | 6 | pF |
| Delta input capacitance (CK, CK#) | CID | 0.50 | |
| Output capacitance (RWDS) | CO | 6 | |
| IO capacitance (DQx) | CIO | 6 | |
| IO capacitance delta (DQx) | CIOD | 0.50 | |

9.5.2 Thermal resistance

Table 24 Thermal resistance

| Parameter ^[39] | Description | Test conditions | 24-ball FBGA package | Unit |
|---------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------------|------|
| θ_{JA} | Thermal resistance (junction to ambient) | Test conditions follow standard test methods and procedures for measuring thermal impedance, per EIA/JESD51. | 54 | °C/W |
| θ_{JC} | Thermal resistance (junction to case) | | 25.5 | |

Notes

- 36.These values are guaranteed by design and are tested on a sample basis only.
- 37.Contact capacitance is measured according to JEP147 procedure for measuring capacitance using a vector network analyzer. V_{CC} , V_{CCQ} are applied and all other signals (except the signal under test) floating. DQ's should be in the high impedance state.
- 38.Note that the capacitance values for the CK, CK#, RWDS and DQx signals must have similar capacitance values to allow for signal propagation time matching in the system. The capacitance value for CS# is not as critical because there are no critical timings between CS# going active (LOW) and data being presented on the DQs bus.
- 39.This parameter is guaranteed by characterization; not tested in production.

Electrical specifications

9.6 Power-up initialization

HYPERRAM™ products include an on-chip voltage sensor used to launch the power-up initialization process. V_{CC} and V_{CCQ} must be applied simultaneously. When the power supply reaches a stable level at or above $V_{CC}(\text{min})$, the device will require t_{VCS} time to complete its self-initialization process.

The device must not be selected during power-up. CS# must follow the voltage applied on V_{CCQ} until V_{CC} (min) is reached during power-up, and then CS# must remain high for a further delay of t_{VCS} . A simple pull-up resistor from V_{CCQ} to chip select (CS#) can be used to insure safe and proper power-up.

If RESET# is LOW during power up, the device delays start of the t_{VCS} period until RESET# is HIGH. The t_{VCS} period is used primarily to perform refresh operations on the DRAM array to initialize it.

When initialization is complete, the device is ready for normal operation.

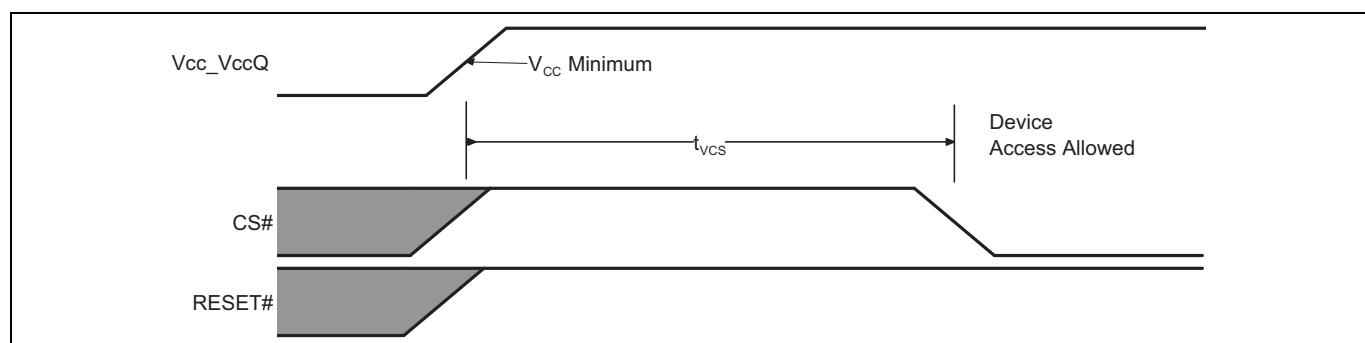


Figure 23 Power-up with RESET# HIGH

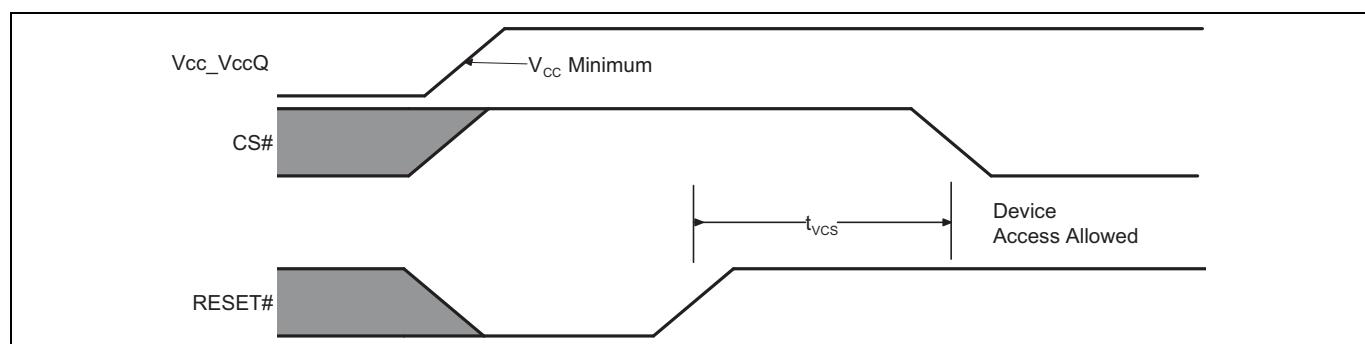


Figure 24 Power-up with RESET# LOW

Table 25 Power up and reset parameters^[40, 41, 42]

| Parameter | Description | Min | Max | Unit |
|-----------|---------------------------------------------------------------------|-----|-----|------|
| V_{CC} | 1.8 V V_{CC} power supply | 1.7 | 2.0 | V |
| | 3.0 V V_{CC} power supply | 2.7 | 3.6 | |
| t_{VCS} | V_{CC} and $V_{CCQ} \geq$ minimum and RESET# HIGH to first access | - | 150 | μs |

Notes

40. Bus transactions (read and write) are not allowed during the power-up reset time (t_{VCS}).

41. V_{CCQ} must be the same voltage as V_{CC} .

42. V_{CC} ramp rate may be non-linear.

9.7 Power down

HYPERRAM™ devices are considered to be powered-off when the array power supply (V_{CC}) drops below the V_{CC} lock-out voltage (V_{LKO}). During a power supply transition down to the V_{SS} level, V_{CCQ} should remain less than or equal to V_{CC} . At the V_{LKO} level, the HYPERRAM™ device will have lost configuration or array data.

V_{CC} must always be greater than or equal to V_{CCQ} ($V_{CC} \geq V_{CCQ}$).

During power-down or voltage drops below V_{LKO} , the array power supply voltages must also drop below V_{CC} reset (V_{RST}) for a power down period (t_{PD}) for the part to initialize correctly when the power supply again rises to V_{CC} minimum. See **Figure 25**.

If during a voltage drop the V_{CC} stays above V_{LKO} the part will stay initialized and will work correctly when V_{CC} is again above V_{CC} minimum. If V_{CC} does not go below and remain below V_{RST} for greater than t_{PD} , then there is no assurance that the POR process will be performed. In this case, a hardware reset will be required ensure the device is properly initialized.

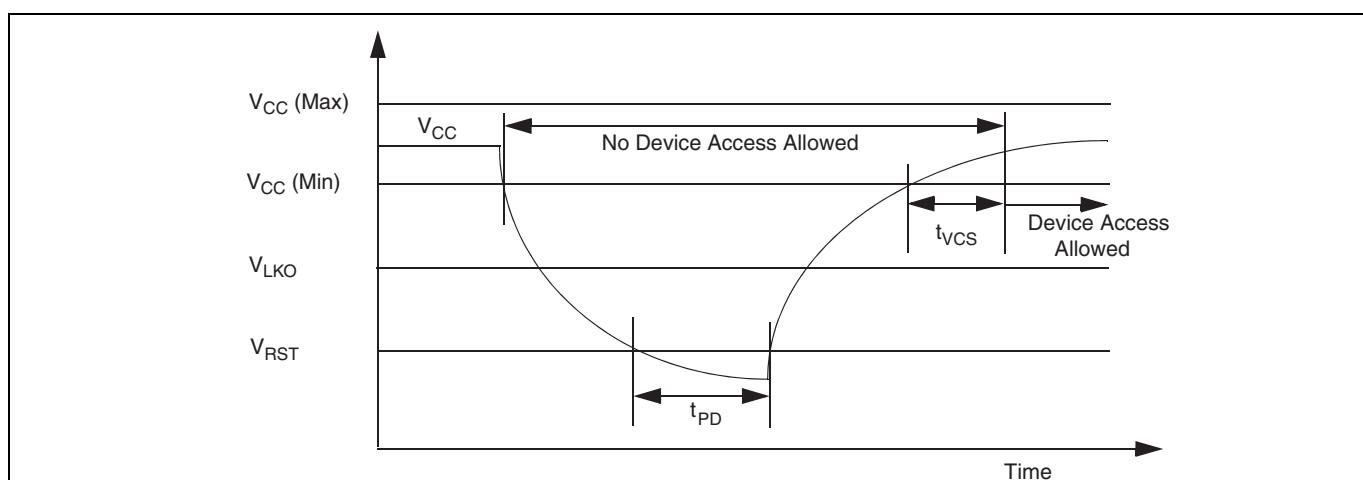


Figure 25 Power down or voltage drop

The following section describes HYPERRAM™ device dependent aspects of power down specifications.

Table 26 1.8 V power-down voltage and timing^[43]

| Symbol | Parameter | Min | Max | Unit |
|-----------|-----------------------------------------------------------------|-----|-----|------|
| V_{CC} | V_{CC} power supply | 1.7 | 2.0 | V |
| V_{LKO} | V_{CC} lock-out below which re-initialization is required | 1.5 | | |
| V_{RST} | V_{CC} low voltage needed to ensure initialization will occur | 0.7 | | |
| t_{PD} | Duration of $V_{CC} \leq V_{RST}$ | 50 | | |

Table 27 3.0 V power-down voltage and timing^[43]

| Symbol | Parameter | Min | Max | Unit |
|-----------|-----------------------------------------------------------------|-----|-----|------|
| V_{CC} | V_{CC} power supply | 2.7 | 3.6 | V |
| V_{LKO} | V_{CC} lock-out below which re-initialization is required | 2.4 | | |
| V_{RST} | V_{CC} low Voltage needed to ensure initialization will occur | 0.7 | | |
| t_{PD} | Duration of $V_{CC} \leq V_{RST}$ | 50 | | |

Note

43. V_{CC} ramp rate can be non-linear.

9.8 Hardware reset

The RESET# input provides a hardware method of returning the device to the standby state.

During t_{RPH} the device will draw I_{CC5} current. If RESET# continues to be held LOW beyond t_{RPH} , the device draws CMOS standby current (I_{CC4}). While RESET# is LOW (during t_{RP}), and during t_{RPH} , bus transactions are not allowed.

A hardware reset will do the following:

- Cause the Configuration Registers to return to their default values
- Halt self-refresh operation while RESET# is LOW - memory array data is considered as invalid
- Force the device to exit the hybrid sleep state
- Force the device to exit the deep power down state

After RESET# returns HIGH, the self-refresh operation will resume. Because self-refresh operation is stopped during RESET# LOW, and the self-refresh row counter is reset to its default value, some rows may not be refreshed within the required array refresh interval per [Table 14](#). This may result in the loss of DRAM array data during or immediately following a hardware reset. The host system should assume DRAM array data is lost after a hardware reset and reload any required data.

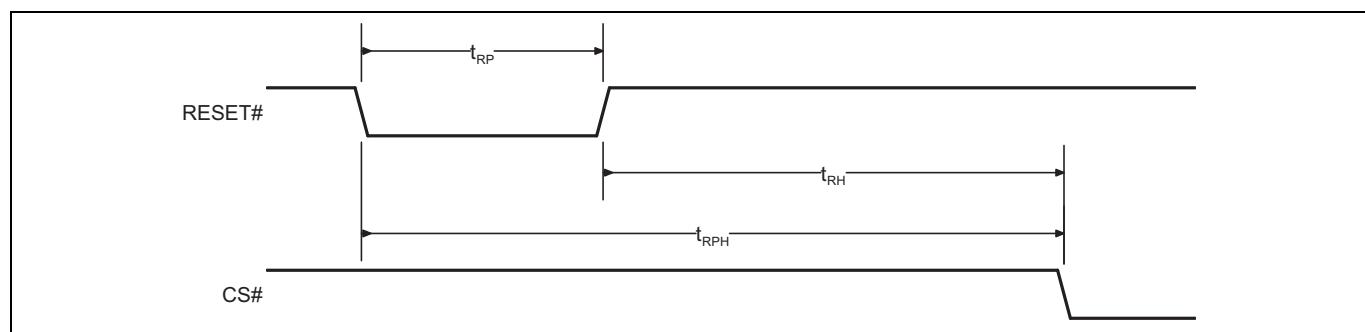


Figure 26 Hardware reset timing diagram

Table 28 Power-up and reset parameters

| Parameter | Description | Min | Max | Unit |
|-----------|------------------------------------------|-----|-----|------|
| t_{RP} | RESET# pulse width | 200 | - | ns |
| t_{RH} | Time between RESET# (HIGH) and CS# (LOW) | | | |
| t_{RPH} | RESET# LOW to CS# LOW | 400 | | |

9.9 Software reset

The software reset provides a software method of returning the device to the standby state. During t_{SR} the device will draw I_{CC5} current.

A software reset will do the following:

- Cause the Configuration Registers to return to their default values
- Halt self-refresh operation during the software reset process - memory array data is considered as invalid

After software reset finishes, the self-refresh operation will resume. Because self-refresh operation is stopped, and the self-refresh row counter is reset to its default value, some rows may not be refreshed within the required array refresh interval per [Table 14](#). This may result in the loss of DRAM array data during or immediately following a software reset. The host system should assume DRAM array data is lost after a software reset and reload any required data.

Table 29 Software reset timing

| Parameter | Description | Min | Max | Unit |
|-----------|----------------------------------------------------------|-----|-----|------|
| t_{SR} | Software reset transaction CS# HIGH to device in standby | - | 400 | ns |

Timing specifications

10 Timing specifications

The following section describes HYPERRAM™ device dependent aspects of timing specifications.

10.1 Key to switching waveforms

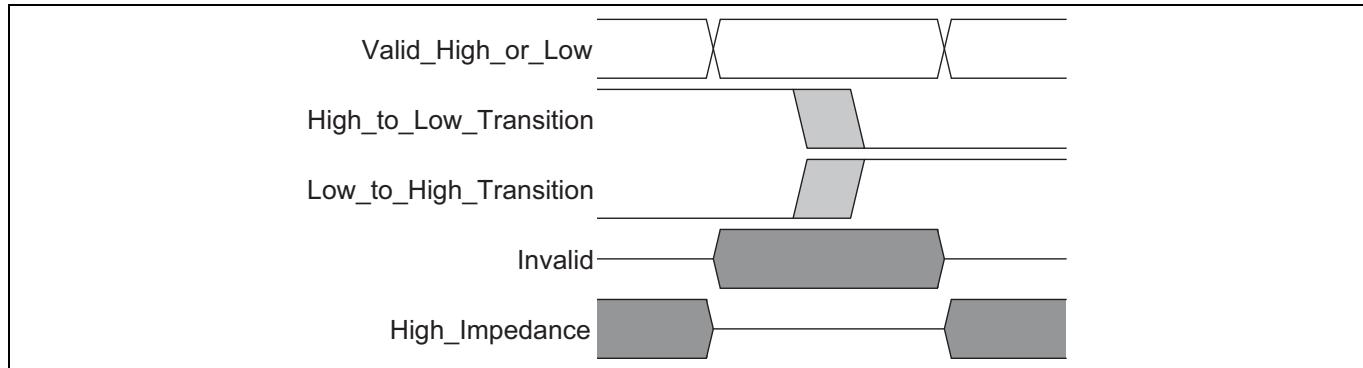


Figure 27 Switching waveforms

10.2 AC test conditions

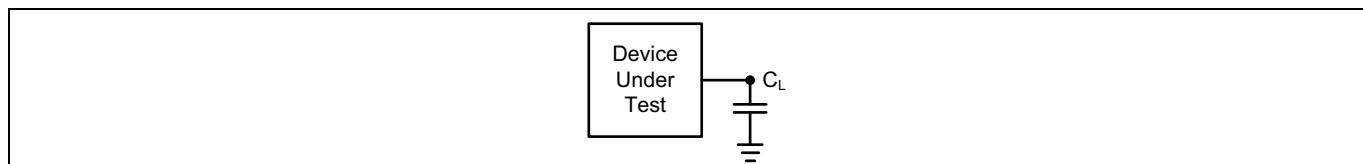


Figure 28 Test setup

Table 30 Test specification^[44]

| Parameter | All speeds | Units |
|----------------------------------------------------------------|----------------|-------|
| Output load capacitance, C_L | 15 | pF |
| Minimum input rise and fall slew rates (1.8 V) ^[45] | 1.13 | V/ns |
| Minimum input rise and fall slew rates (3.0 V) ^[45] | 2.06 | |
| Input pulse levels | 0.0– V_{CCQ} | V |
| Input timing measurement reference levels | $V_{CCQ}/2$ | |
| Output timing measurement reference levels | | |

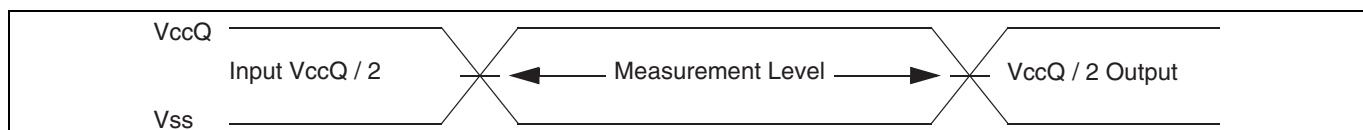


Figure 29 Input waveforms and measurement levels^[46]

Notes

44. Input and output timing is referenced to $V_{CCQ}/2$ or to the crossing of CK/CK#.

45. All AC timings assume this input slew rate.

46. Input timings for the differential CK/CK# pair are measured from clock crossings.

Timing specifications

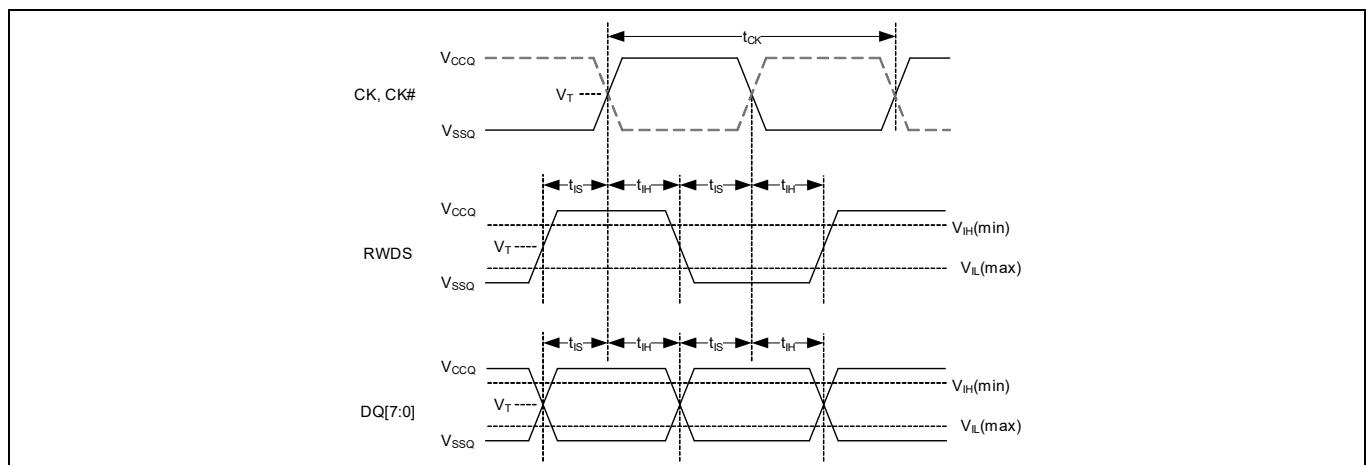


Figure 30 DDR input timing reference level

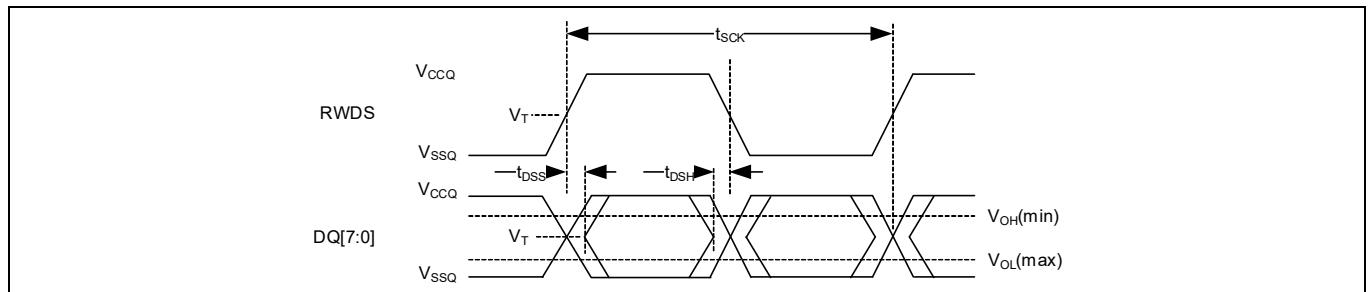


Figure 31 DDR output timing reference level

Timing specifications

10.3 CLK characteristics

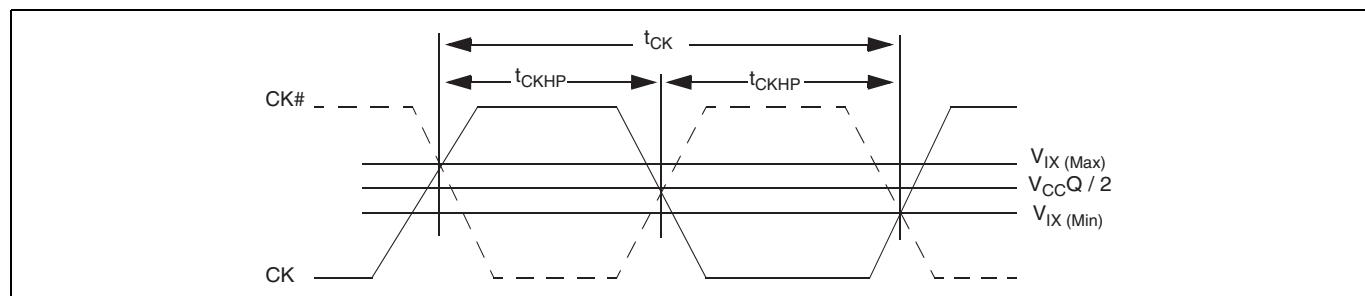


Figure 32 Clock characteristics

Table 31 Clock timings^[47, 48, 49]

| Parameter ^[50, 51] | Symbol | 200 MHz | | 166 MHz | | Unit |
|-------------------------------------------------------------------------------------------------|-------------------|---------|------|---------|------|-----------------|
| | | Min | Max | Min | Max | |
| CK period | t _{CK} | 5 | - | 6 | - | ns |
| CK half period - duty cycle | t _{CKHP} | 0.45 | 0.55 | 0.45 | 0.55 | t _{CK} |
| CK half period at frequency Min = 0.45 t _{CK} Min Max = 0.55 t _{CK} Min | t _{CKHP} | 2.25 | 2.75 | 2.7 | 3.3 | ns |

Table 32 Clock AC/DC electrical characteristics^[52, 53]

| Parameter | Symbol | Min | Max | Unit |
|----------------------------------|---------------------|------------------------|------------------------|------|
| DC input voltage | V _{IN} | -0.3 | V _{CCQ} + 0.3 | V |
| DC input differential voltage | V _{ID(DC)} | V _{CCQ} × 0.4 | V _{CCQ} + 0.6 | |
| AC input differential voltage | V _{ID(AC)} | V _{CCQ} × 0.6 | V _{CCQ} + 0.6 | |
| AC differential crossing voltage | V _{IX} | V _{CCQ} × 0.4 | V _{CCQ} × 0.6 | |

Notes

47. Clock jitter of $\pm 5\%$ is permitted
48. Minimum frequency (maximum t_{CK}) is dependent upon maximum CS# Low time (t_{CSM}), initial latency, and burst length.
49. CK and CK# input slew rate must be ≥ 1 V/ns (2 V/ns if measured differentially).
50. CK# is only used on the 1.8 V device and is shown as a dashed waveform.
51. The 3-V device uses a single-ended clock input.
52. V_{ID} is the magnitude of the difference between the input level on CK and the input level on CK#.
53. The value of V_{IX} is expected to equal V_{CCQ}/2 of the transmitting device and must track variations in the DC level of V_{CCQ}.

Timing specifications

10.4 AC characteristics

10.4.1 Read transactions

Table 33 HYPERRAM™ specific read timing parameters

| Parameter | Symbol | 200 MHz | | 166 MHz | | Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------|------|---------|-------|------|
| | | Min | Max | Min | Max | |
| Chip select high between transactions - 1.8 V | t_{CSHI} | 6 | - | 6 | - | ns |
| Chip select high between transactions - 3.0 V | | | | | | |
| HYPERRAM™ read-write recovery time - 1.8 V | t_{RWR} | 35 | - | 36 | - | ns |
| HYPERRAM™ read-write recovery time - 3.0 V | | | | | | |
| Chip select setup to next CK rising edge | t_{CSS} | 4.0 | | 3 | | |
| Data strobe valid - 1.8 V | t_{DSV} | - | 5.0 | - | 12 | ns |
| Data strobe valid - 3.0 V | | | | | | |
| Input setup - 1.8 V | t_{IS} | 0.5 | - | 0.6 | - | ns |
| Input setup - 3.0 V | | | | | | |
| Input hold - 1.8 V | t_{IH} | - | - | - | - | ns |
| Input hold - 3.0 V | | | | | | |
| HYPERRAM™ read initial access time - 1.8 V | t_{ACC} | 35 | - | 36 | - | ns |
| HYPERRAM™ read initial access time - 3.0 V | | | | | | |
| Clock to DQs low Z | t_{DQLZ} | 0 | | 0 | | |
| CK transition to DQ valid - 1.8 V | t_{CKD} | 1 | 5.0 | 1 | 5.5 | ns |
| CK transition to DQ valid - 3.0 V | | | | | | |
| CK transition to DQ invalid - 1.8 V | t_{CKDI} | 0 | 4.2 | 0 | 4.6 | ns |
| CK transition to DQ invalid - 3.0 V | | | | | | |
| Data Valid (t_{DV} min = the lesser of: t_{CKHP} min - t_{CKD} max + t_{CKDI} max or t_{CKHP} min - t_{CKD} min + t_{CKDI} min) - 1.8 V | t_{DV} ^[54, 55] | 1.45 | - | 1.8 | - | ns |
| Data Valid (t_{DV} min = the lesser of: t_{CKHP} min - t_{CKD} max + t_{CKDI} max or t_{CKHP} min - t_{CKD} min + t_{CKDI} min) - 3.0 V | | | | | | |
| CK transition to RWDS valid - 1.8 V | t_{CKDS} | - | 5.0 | 1 | 5.5 | ns |
| CK transition to RWDS valid - 3.0 V | | | | | | |
| RWDS transition to DQ valid - 1.8 V | t_{DSS} | - | 6.5 | - | 7 | ns |
| RWDS transition to DQ valid - 3.0 V | | | | | | |
| RWDS transition to DQ invalid - 1.8 V | t_{DSH} | -0.4 | +0.4 | -0.45 | +0.45 | ns |
| RWDS transition to DQ invalid - 3.0 V | | | | | | |
| Chip select hold after CK falling edge | t_{CSH} | 0 | - | 0 | - | |

Notes

54. Refer to [Figure 35](#) for data valid timing.55. The t_{DV} timing calculation is provided for reference only, not to determine the spec limit. The spec limit is guaranteed by testing.

Table 33 **HYPERRAM™ specific read timing parameters (continued)**

| Parameter | Symbol | 200 MHz | | 166 MHz | | Unit |
|-----------------------------------------------------|-------------|---------|-----|---------|-----|------|
| | | Min | Max | Min | Max | |
| Chip select inactive to RWDS high-Z - 1.8 V | t_{DSZ} | - | 5.0 | - | 6 | ns |
| Chip select inactive to RWDS high-Z - 3.0 V | | | 6.5 | | 7 | |
| Chip select inactive to DQ high-Z - 1.8 V | t_{OZ} | - | 5 | - | 6 | ns |
| Chip select inactive to DQ high-Z - 3.0 V | | | 6.5 | | 7 | |
| Refresh time - 1.8 V | t_{RFH} | 35 | - | 36 | - | ns |
| Refresh time - 3.0 V | | | | | | |
| CK transition to RWDS Low @ CA phase @ Read - 1.8 V | t_{CKDSR} | 1 | 5.5 | 1 | 5.5 | ns |
| CK transition to RWDS Low @ CA phase @ Read - 3.0 V | | | 7 | | 7 | |

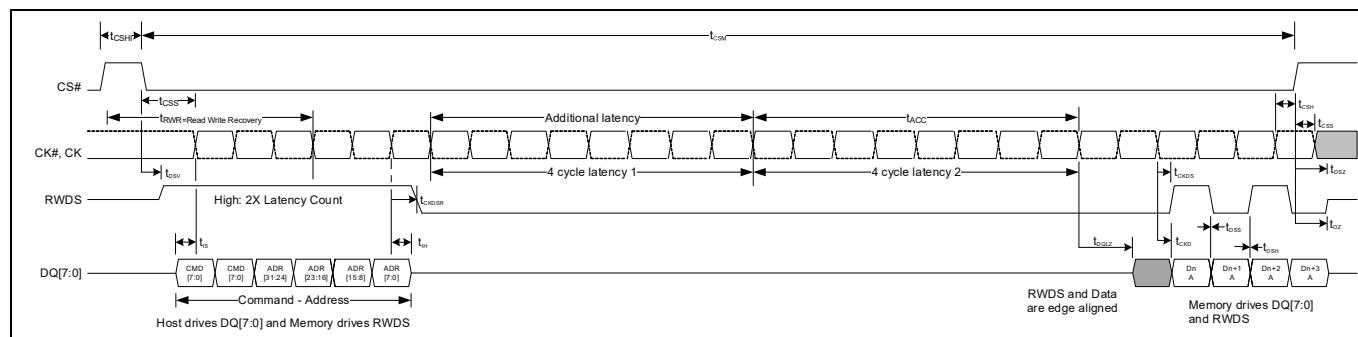


Figure 33 Read timing parameters - With additional latency

10.4.2 Write transactions

Table 34 Write timing parameters

| Parameter | Symbol | 200 MHz | | 166 MHz | | Unit |
|--------------------------------------|-----------|---------|-----|---------|-----|---------|
| | | Min | Max | Min | Max | |
| Read-write recovery time | t_{RWR} | 35 | - | 36 | - | ns |
| Access time | t_{ACC} | | | | | |
| Refresh time | t_{RFH} | | | | | |
| Chip select maximum low time (85°C) | t_{CSM} | - | 4 | - | 4 | μs |
| Chip select maximum low time (105°C) | t_{CSM} | | 1 | | 1 | |
| RWDS data mask valid | t_{DMV} | 0 | - | 0 | - | |

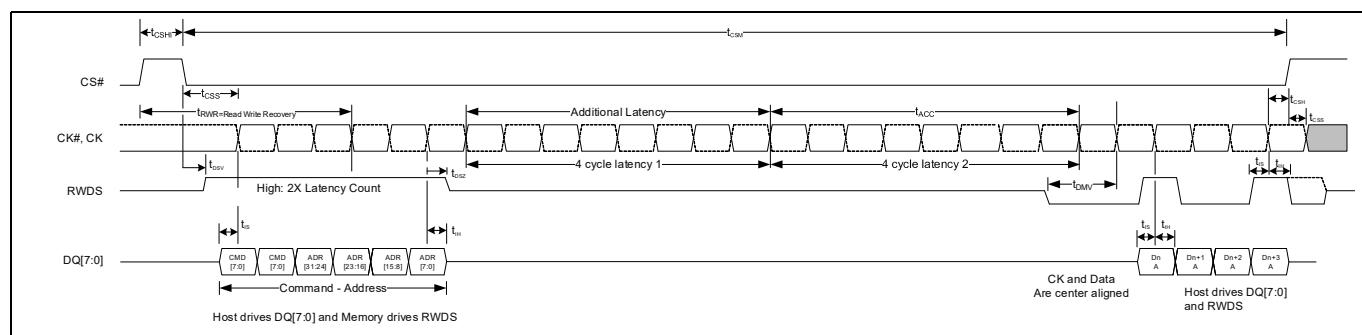


Figure 34 Write timing parameters - With additional latency

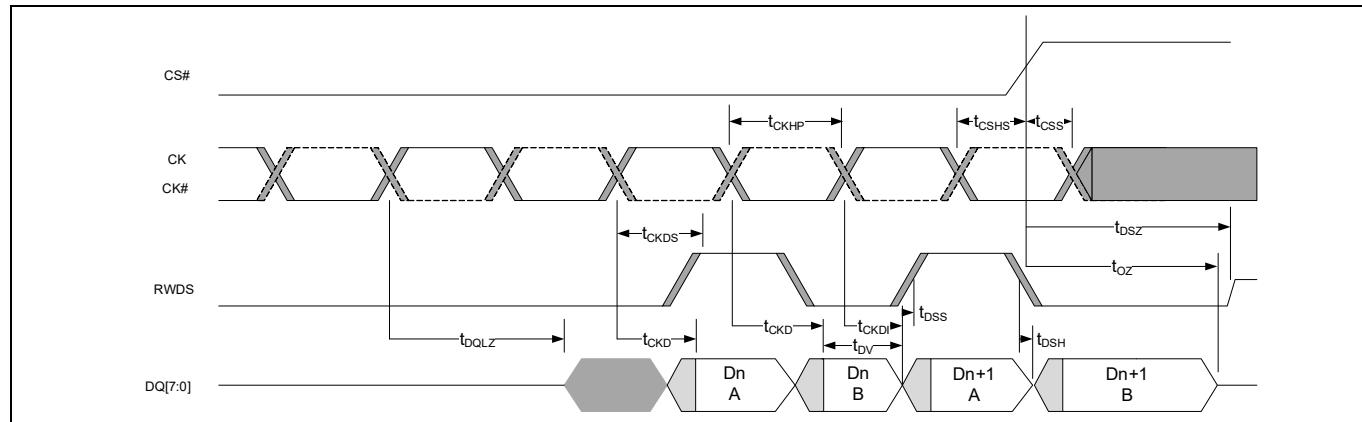


Figure 35 Data valid timing^[56, 57, 58]

Notes

56. t_{CKP} and t_{CKPL} parameters define the beginning and end position of data valid period.

57. t_{DPSS} and t_{DSH} define how early or late DQ may transition relative to RWDS. This is a potential skew between the CK to DQ delay t_{CKD} and CK to RWDS delay t_{CKPS} .

58. Since DQ and RWDS are the same output types, the t_{CKD} and t_{CKDS} values track together (vary by the same ratio).

Physical interface

11 Physical interface

11.1 FBGA 24-ball 5 x 5 array footprint

HYPERRAM™ devices are provided in Fortified Ball Grid Array (FBGA), 1 mm pitch, 24-ball, 5 x 5 ball array footprint, with 6mm x 8mm body.

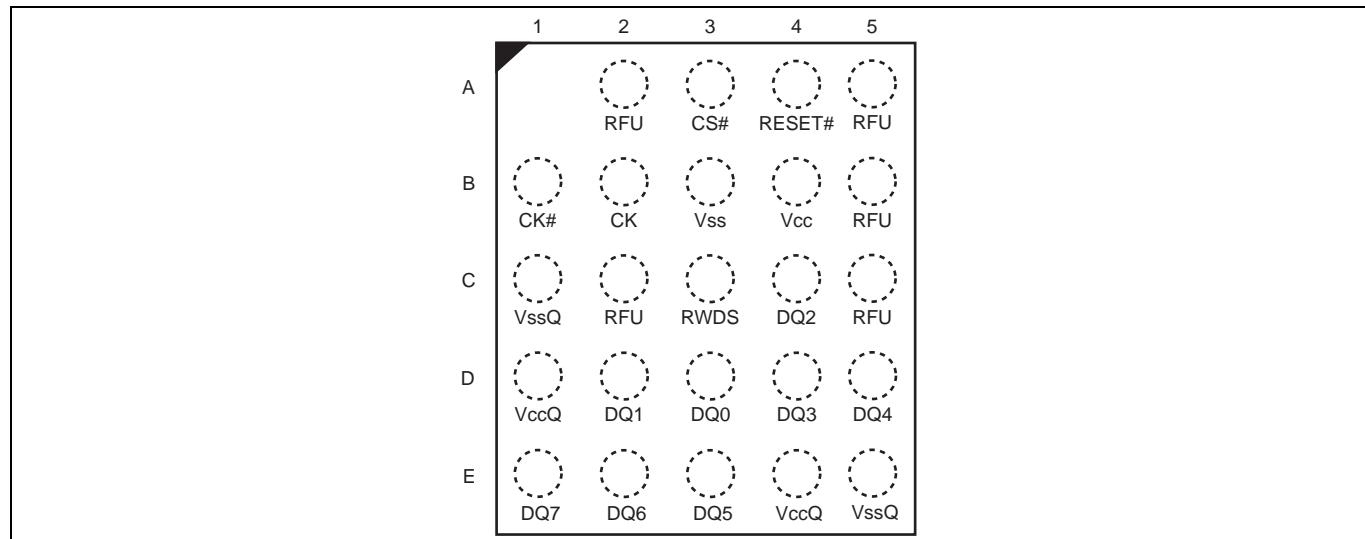


Figure 36 24-ball FBGA, 6 x 8 mm, 5 x 5 ball footprint, top view

Physical interface

11.2 Package diagram

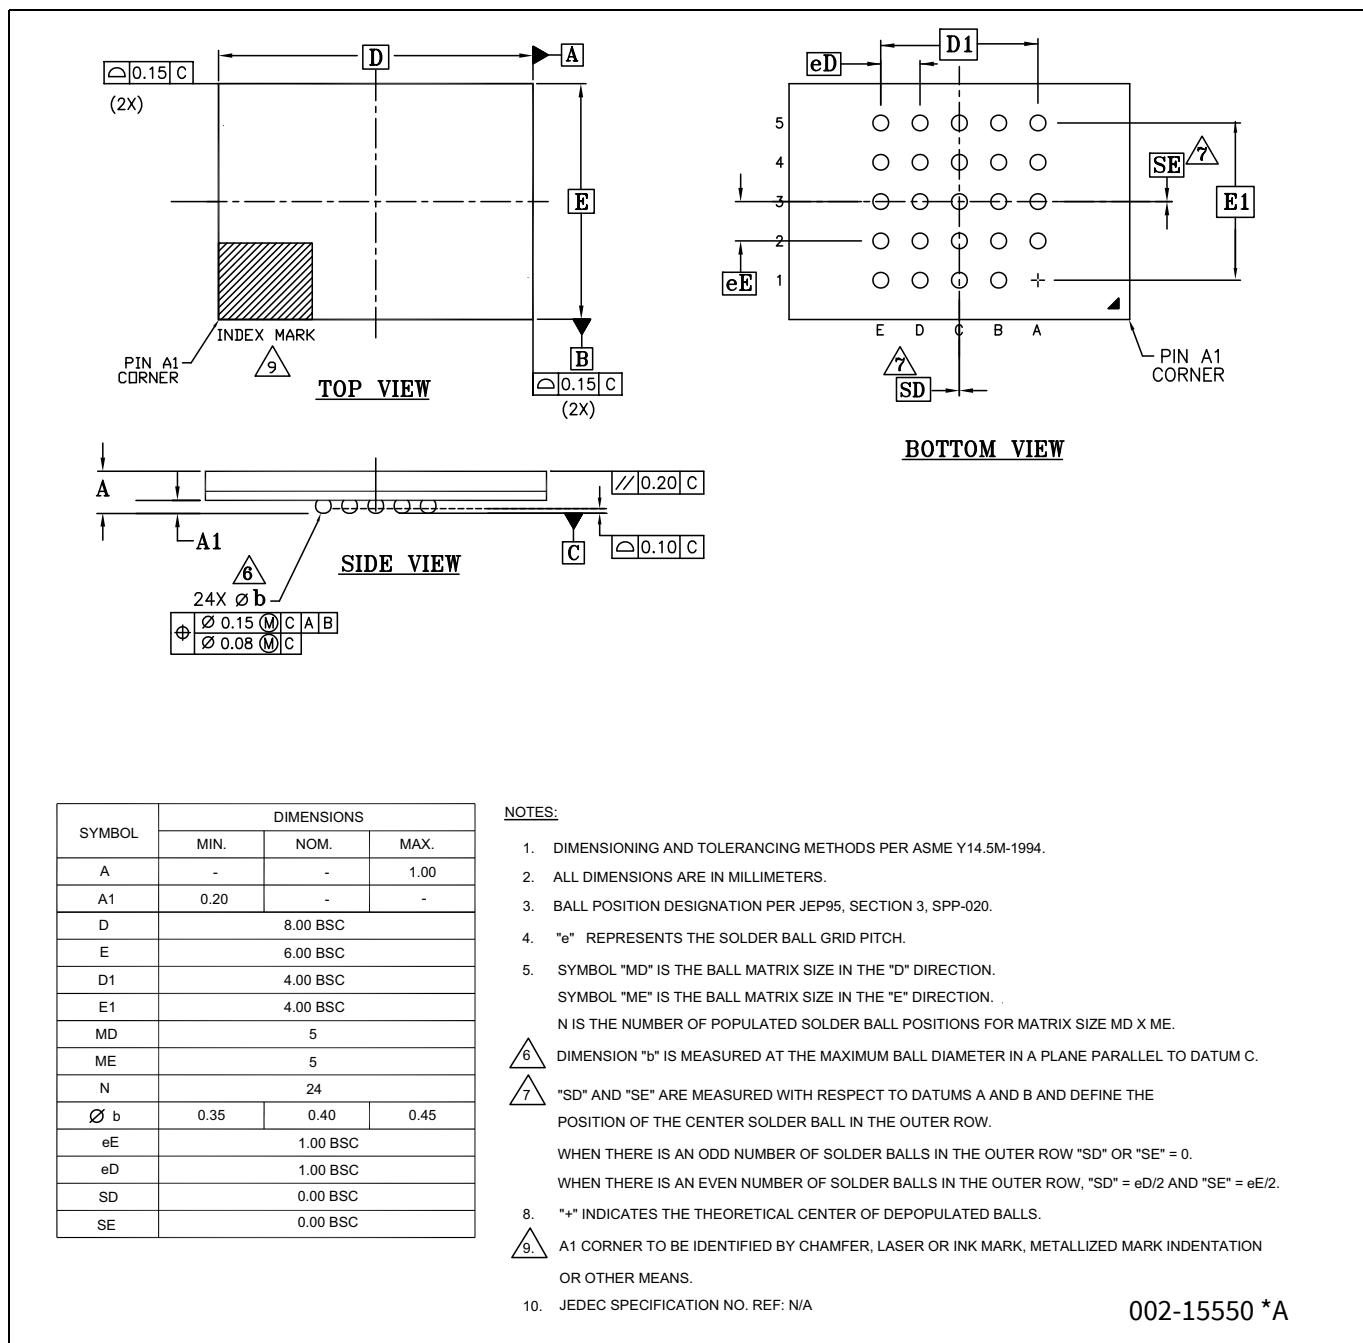


Figure 37 24-ball BGA (8.0 mm x 6.0 mm x 1.0 mm) package outline, 002-15550

DDR center-aligned read strobe (DCARS) functionality

12 DDR center-aligned read strobe (DCARS) functionality

The HYPERRAM™ device offers an optional feature that enables independent skewing (phase shifting) of the RWDS signal with respect to the read data outputs. This feature is provided in certain devices, based on the ordering part number (OPN).

When the DCARS feature is provided, a second differential phase shifted clock input PSC/PSC# is used as the reference for RWDS edges instead of CK/CK#. The second clock is generally a copy of CK/CK# that is phase shifted 90 degrees to place the RWDS edges centered within the DQ signals valid data window. However, other degrees of phase shift between CK/CK# and PSC/PSC# may be used to optimize the position of RWDS edges within the DQ signals valid data window so that RWDS provides the desired amount of data setup and hold time in relation to RWDS edges.

PSC/PSC# is not used during a write transaction. PSC and PSC# may be driven LOW and HIGH respectively or, both may be driven LOW during write transactions.

The PSC/PSC# is used in xSPI (Octal) devices. If single-ended mode is selected, then PSC# must be driven LOW but must not be left floating (leakage concerns).

12.1 xSPI HYPERRAM™ products with DCARS signal description

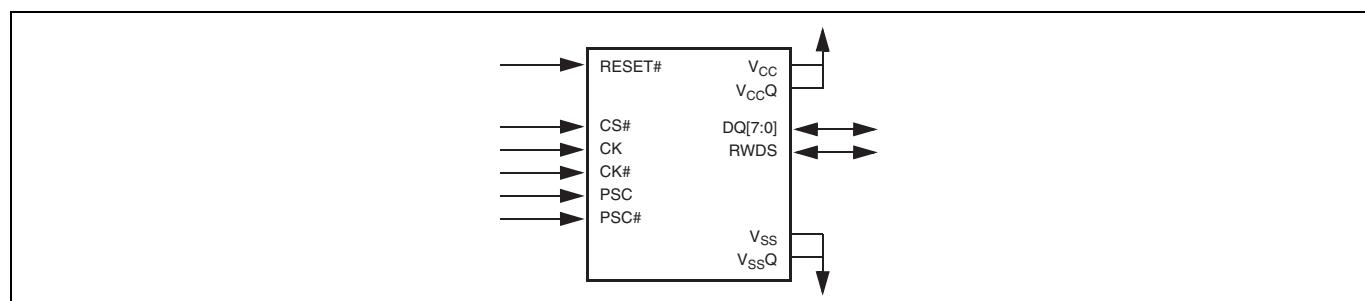


Figure 38 xSPI product with DCARS signal diagram

Table 35 Signal description

| Symbol | Type | Description |
|-----------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CS# | Input | Chip Select. xSPI transactions are initiated with a HIGH to LOW transition. xSPI transactions are terminated with a LOW to HIGH transition. |
| CK, CK# | | Differential Clock. Command, address, and data information is output with respect to the crossing of the CK and CK# signals. Use of differential clock is optional. Single Ended Clock. CK# is not used, only a single ended CK is used. The clock is not required to be free-running. |
| PSC, PSC# | | Phase Shifted Clock. PSC/PSC# allows independent skewing of the RWDS signal with respect to the CK/CK# inputs. If the CK/CK# (differential mode) is configured, then PSC/PSC# are used. Otherwise, only PSC is used (single ended). PSC (and PSC#) may be driven HIGH and LOW respectively or both may be driven LOW during write transactions. |
| RWDS | Output | Read-Write Data Strobe. Data bytes output during read transactions are aligned with RWDS based on the phase shift from CK, CK# to PSC, PSC#. PSC, PSC# cause the transitions of RWDS, thus the phase shift from CK, CK# to PSC, PSC# is used to place RWDS edges within the data valid window. RWDS is an input during write transactions to function as a data mask. At the beginning of all bus transactions RWDS is an output and indicates whether additional initial latency count is required. The dual-die, 128-Mb HyperRAM chip supports data transactions with additional (2X) latency only. |
| DQ[7:0] | Input/output | Data Input/Output. CA/data information is transferred on these DQs during read and write transactions. |
| RESET# | Input | Hardware RESET. When LOW, the device will self initialize and return to the idle state. RWDS and DQ[7:0] are placed into the HIGH-Z state when RESET# is LOW. RESET# includes a weak pull-up, if RESET# is left unconnected it will be pulled up to the HIGH state. |
| V_{CC} | Power supply | Array Power. |
| V_{CCQ} | | Input/Output Power. |
| V_{SS} | | Array Ground. |
| V_{SSQ} | | Input/Output Ground. |

DDR center-aligned read strobe (DCARS) functionality

12.2 HYPERRAM™ products with DCARS — FBGA 24-ball, 5 x 5 array footprint

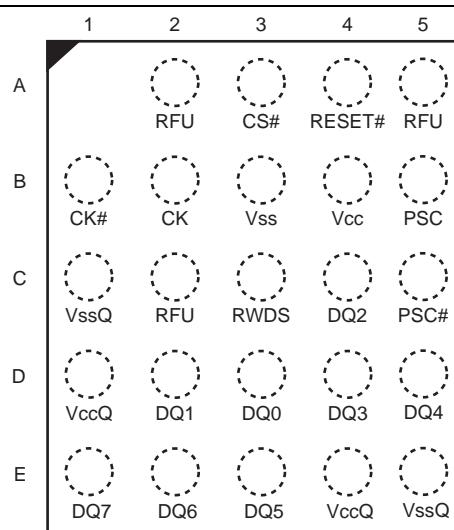


Figure 39 24-ball FBGA, 5 x 5 ball footprint, top view

DDR center-aligned read strobe (DCARS) functionality

12.3 HYPERRAM™ memory with DCARS timing

The illustrations and parameters shown here are only those needed to define the DCARS feature and show the relationship between the phase shifted clock, RWDS, and data.

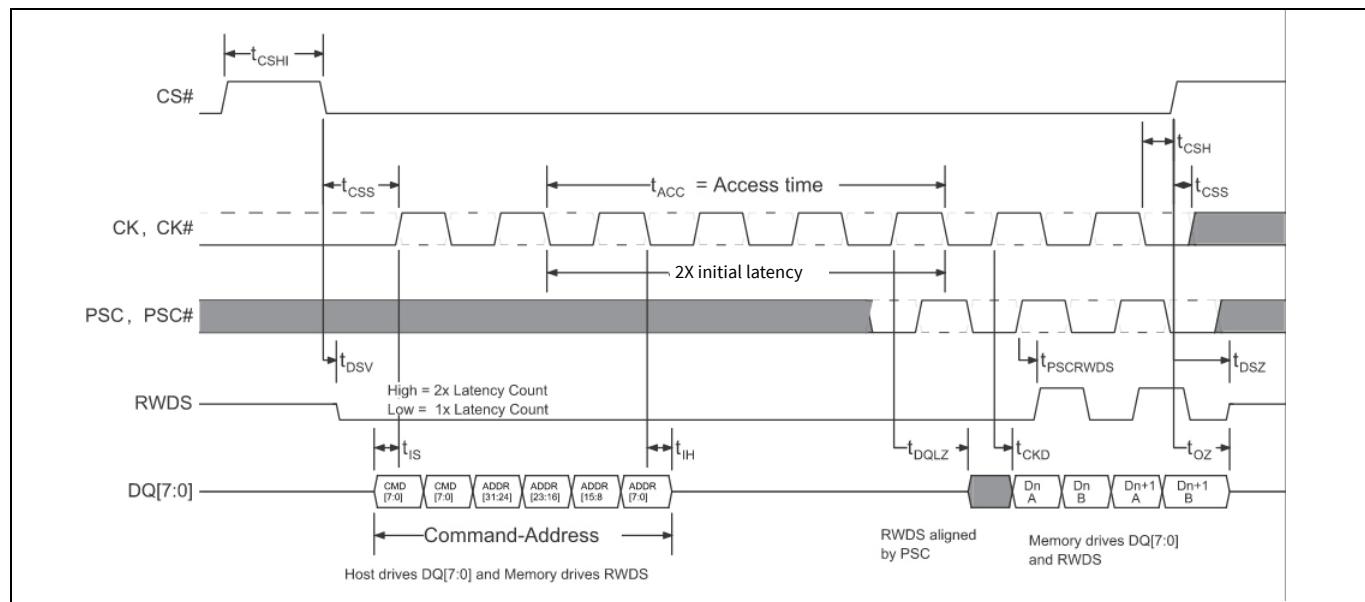


Figure 40 HYPERRAM™ memory DCARS timing diagram^[59, 60, 61, 62]

Notes

59. Transactions must be initiated with CK = LOW and CK# = HIGH. CS# must return HIGH before a new transaction is initiated.
60. The memory drives RWDS during read transactions.
61. This example demonstrates a latency code setting of four clocks and no additional initial latency required.
62. The initial latency "low = 1x latency count" is not applicable in dual-die, 128 Mb HYPERRAM™.

DDR center-aligned read strobe (DCARS) functionality

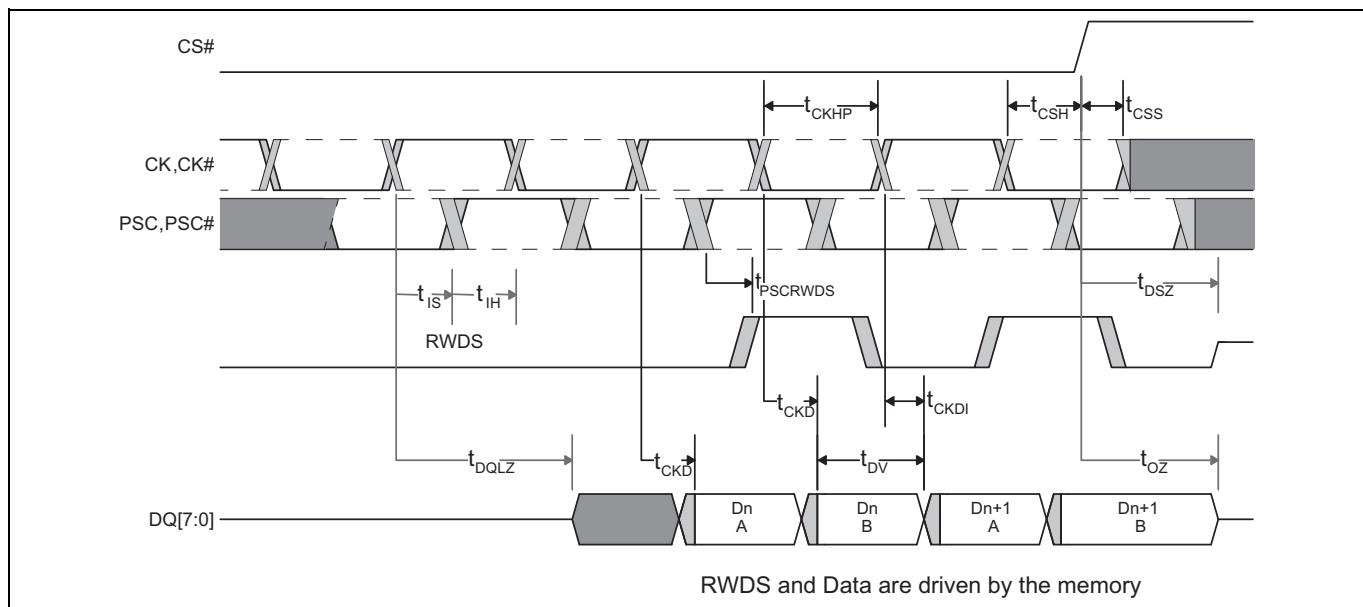
Figure 41 DCARS data valid timing^[63, 64, 65, 66]

Table 36 DCARS read timing

| Parameter | Symbol | 200 MHz | | 166 MHz | | Unit |
|-------------------------------------------------------------------|-------------------------|---------|-----|---------|-----|------|
| | | Min | Max | Min | Max | |
| Input setup - CK/CK# setup w.r.t PSC/PSC# (edge to edge) | t_{IS} | 0.5 | - | 0.6 | - | ns |
| CK half period - duty cycle (edge to edge) | t_{IH} | | | | | |
| HYPERRAM™ PSC transition to RWDS transition | $t_{PSCRWDS}$ | | | | | |
| Time delta between CK to DQ valid and PSC to RWDS ^[67] | $t_{PSCRWDS} - t_{CKD}$ | | | | | |

Notes

63. Transactions must be initiated with CK = LOW and CK# = HIGH. CS# must return HIGH before a new transaction is initiated.

64. This figure shows a closer view of the data transfer portion of Figure 38 in order to more clearly show the Data Valid period as affected by clock jitter and clock to output delay uncertainty.

65. The delay (phase shift) from CK to PSC is controlled by the xSPI master interface (host) and is generally between 40 and 140 degrees in order to place the RWDS edge within the data valid window with sufficient set-up and hold time of data to RWDS. The requirements for data set-up and hold time to RWDS are determined by the xSPI master interface design and are not addressed by the xSPI slave timing parameters.

66. The xSPI timing parameters of t_{CKD} , and t_{CKDI} define the beginning and end position of the data valid period. The t_{CKD} and t_{CKDI} values track together (vary by the same ratio) because RWDS and Data are outputs from the same device under the same voltage and temperature conditions.


67. Sampled, not 100% tested.

Ordering information

13 Ordering information

13.1 Ordering part number

The ordering part number is formed by a valid combination of the following:

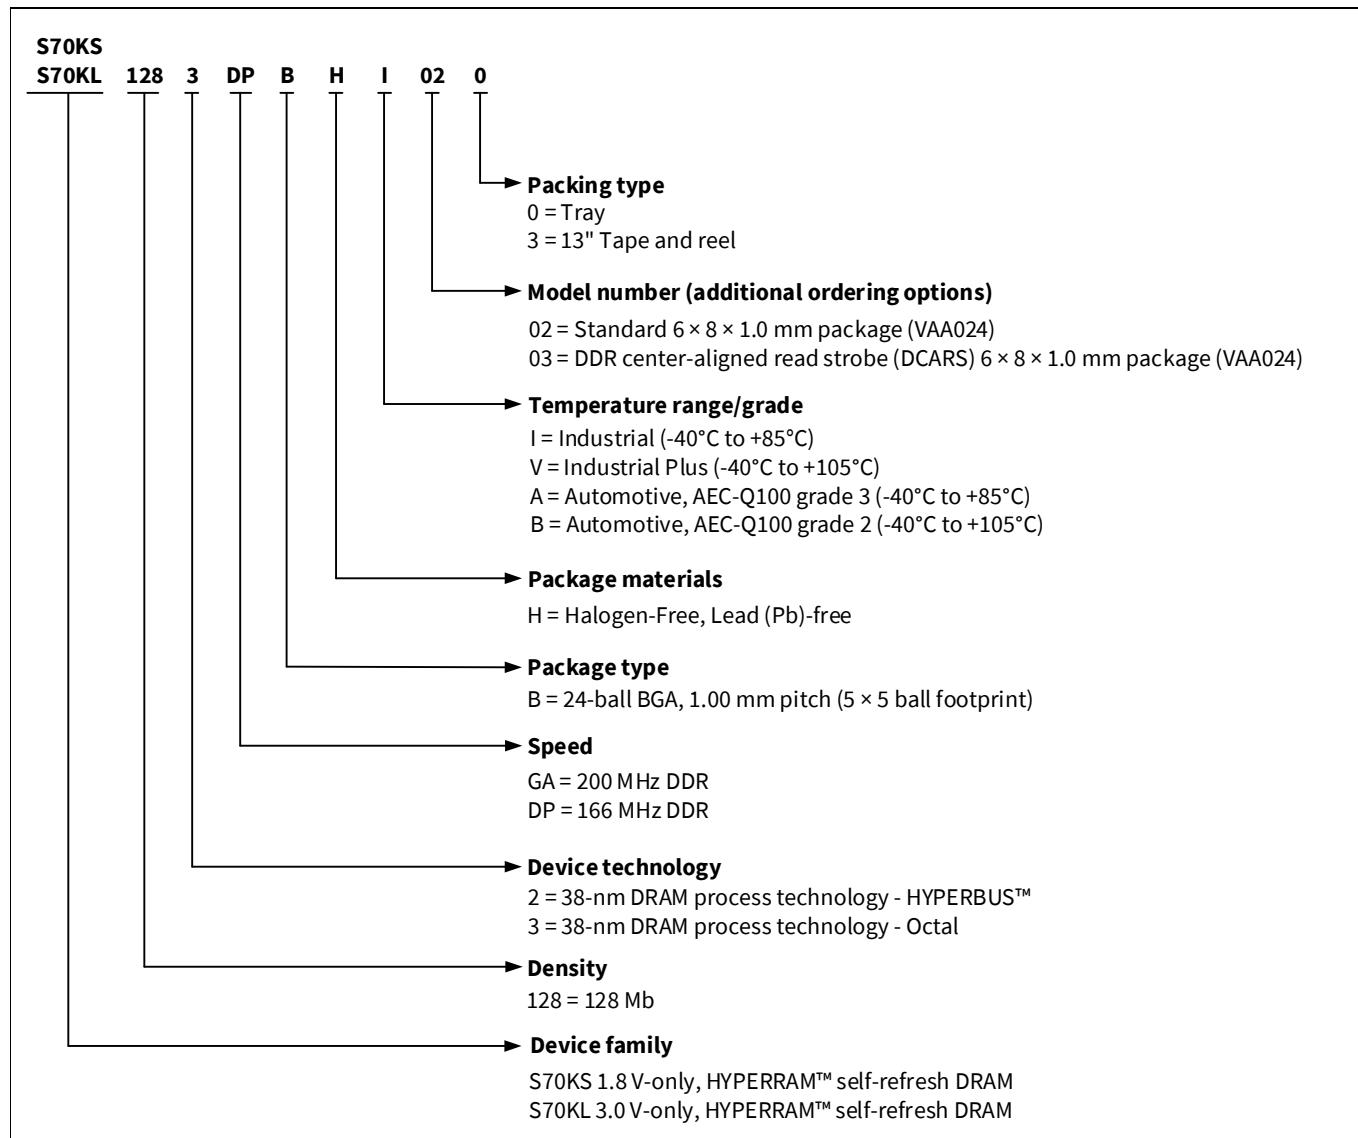

13.2 Valid combinations

The recommended combinations table lists configurations planned to be available in volume. **Table 37** will be updated as new combinations are released. Contact your local sales representative to confirm availability of specific combinations and to check on newly released combinations.

Table 37 Valid combinations – Standard

| Device family | Density | Technology | Speed | Package, material, and temperature | Model number | Packing type | Ordering part number | Package marking | | | |
|---------------|---------|------------|-------|------------------------------------|--------------|--------------|----------------------|-----------------|--|--|--|
| S70KL | 128 | 3 | DP | BHI | 02 | 0 | S70KL1283DPBHI020 | 7KL1283DPHI02 | | | |
| | | | | | | 3 | S70KL1283DPBHI023 | 7KL1283DPHI02 | | | |
| | | | GA | | | 0 | S70KL1283GABHI020 | 7KL1283GAHI02 | | | |
| | | | | | | 3 | S70KL1283GABHI023 | 7KL1283GAHI02 | | | |
| | | | DP | BHV | | 0 | S70KL1283DPBHV020 | 7KL1283DPHV02 | | | |
| | | | | | | 3 | S70KL1283GABHI023 | 7KL1283GAHI02 | | | |
| | | | GA | | | 0 | S70KL1283GABHV020 | 7KL1283GAHV02 | | | |
| | | | | | | 3 | S70KL1283GABHV023 | 7KL1283GAHV02 | | | |
| S70KS | 128 | 3 | GA | BHI | 02 | 0 | S70KS1283GABHI020 | 7KS1283GAHI02 | | | |
| | | | | | | 3 | S70KS1283GABHI023 | 7KS1283GAHI02 | | | |
| | | | BHV | | | 0 | S70KS1283GABHV020 | 7KS1283GAHV02 | | | |
| | | | | | | 3 | S70KS1283GABHV023 | 7KS1283GAHV02 | | | |

13.3 Valid combinations – Automotive grade / AEC-Q100

Table 38 lists configurations that are Automotive Grade / AEC-Q100 qualified and are planned to be available in volume. The table will be updated as new combinations are released. Consult your local sales representative to confirm availability of specific combinations and to check on newly released combinations.

Production part approval process (PPAP) support is only provided for AEC-Q100 grade products.

Products to be used in end-use applications that require ISO/TS-16949 compliance must be AEC-Q100 grade products in combination with PPAP. Non-AEC-Q100 grade products are not manufactured or documented in full compliance with ISO/TS-16949 requirements.

AEC-Q100 grade products are also offered without PPAP support for end-use applications that do not require ISO/TS-16949 compliance.

Table 38 Valid combinations – Automotive grade / AEC-Q100

| Device family | Density | Technology | Speed | Package, material, and temperature | Model number | Packing type | Ordering part number | Package marking | |
|---------------|---------|------------|-------|------------------------------------|--------------|--------------|----------------------|-----------------|--|
| S70KL | 128 | DP | 3 | BHA | 02 | 0 | S70KL1283DPBHA020 | 7KL1283DPHA02 | |
| | | | 3 | | | 3 | S70KL1283DPBHA023 | 7KL1283DPHA02 | |
| | | | 3 | | | 0 | S70KL1283DPBHB020 | 7KL1283DPHB02 | |
| | | | 3 | BHB | | 3 | S70KL1283DPBHB023 | 7KL1283DPHB02 | |
| | | GA | 3 | | | 0 | S70KL1283GABHB020 | 7KL1283GABHB02 | |
| | | | 3 | | | 3 | S70KL1283GABHB023 | 7KL1283GABHB02 | |
| S70KS | 128 | GA | 3 | BHA | 02 | 0 | S70KS1283GABHA020 | 7KS1283GAHA02 | |
| | | | 3 | | | 3 | S70KS1283GABHA023 | 7KS1283GAHA02 | |
| | | BHB | 3 | | | 0 | S70KS1283GABHB020 | 7KL1283GABHB02 | |
| | | | 3 | | | 3 | S70KS1283GABHB023 | 7KS1283GABHB02 | |

Acronyms

14 Acronyms

Table 39 Acronyms used in this document

| Acronym | Description |
|---------|-----------------------------------------|
| CMOS | complementary metal oxide semiconductor |
| DCARS | DDR Center-Aligned Read Strobe |
| DDR | double data rate |
| DPD | deep power down |
| DRAM | dynamic RAM |
| HS | hybrid sleep |
| MSb | most significant bit |
| POR | power-on reset |
| PSRAM | pseudo static RAM |
| PVT | process, voltage, and temperature |
| RWDS | read-write data strobe |
| SPI | serial peripheral interface |
| xSPI | expanded serial peripheral interface |

Document conventions

15 Document conventions

15.1 Units of measure

Table 40 Units of measure

| Symbol | Unit of measure |
|---------------|------------------------|
| °C | degree Celsius |
| MHz | megahertz |
| µA | microampere |
| µs | microsecond |
| mA | milliampere |
| mm | millimeter |
| ns | nanosecond |
| Ω | ohm |
| % | percent |
| pF | picofarad |
| V | volt |
| W | watt |

Revision history

Revision history

| Document version | Date of release | Description of changes |
|------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ** | 2020-02-07 | New datasheet. |
| *A | 2022-04-19 | <p>Migrated to Infineon template.</p> <p>Configuration Register 1: Updated description.</p> <p>Interface states: Updated Table 15. Updated Note 27.</p> <p>Hybrid sleep: Updated Table 16.</p> <p>DC characteristics: Updated Table 21.</p> <p>Added Thermal resistance.</p> <p>AC test conditions: Added Figure 30 and Figure 31.</p> <p>Read transactions: Updated Table 33. Added Notes 54, 55 and referred these notes in t_{DV} parameter in Table 33. Removed figure “Read Timing Diagram”. Updated Figure 33.</p> <p>Write transactions: Updated Figure 34 and Figure 35. Added Notes 56, 57, 58 and referred the same notes in Figure 35.</p> <p>Valid combinations: Updated part numbers in Table 37. Deleted Table 38. Valid combinations - DCARS and Table 40. Valid combinations – DCARS automotive grade / AEC-Q100.</p> |

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2022-04-19

Published by

Infineon Technologies AG

81726 Munich, Germany

**© 2022 Infineon Technologies AG.
All Rights Reserved.**

**Do you have a question about this
document?**

Go to www.infineon.com/support

Document reference

002-29418 Rev. *A

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.