


RF POWER VERTICAL MOSFET

The VRF157FL is a gold-metallized silicon n-channel RF power transistor designed for broadband commercial and military applications requiring high power and gain without compromising reliability, ruggedness, or intermodulation distortion.

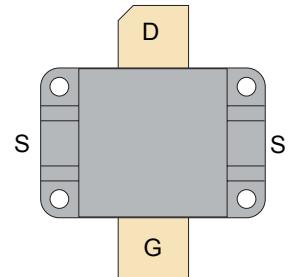

FEATURES

- Improved Ruggedness $V_{(BR)DSS} = 170V$
- Designed for 2-100mHz Operation
- 600W with 21dB Typical Gain @ 30MHz, 50V
- Excellent Stability & Low IMD
- Common Source Configuration
- Available in Matched Pairs
- 70:1 Load VSWR Capability at Specified Operating Conditions
- Nitride Passivated
- Economical Flangeless Package
- Refractory Gold Metallization
- High Voltage Replacement for MRF157
- RoHS Compliant 

Maximum Ratings

All Ratings: $T_c = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	VRF157FL(MP)		Unit
V_{DSS}	Drain-Source Voltage	170		V
I_D	Continuous Drain Current @ $T_c = 25^\circ\text{C}$	60		A
V_{GS}	Gate-Source Voltage	± 40		V
P_D	Total Device dissipation @ $T_c = 25^\circ\text{C}$	1350		W
T_{STG}	Storage Temperature Range	-65 to 150		$^\circ\text{C}$
T_J	Operating Junction Temperature Max	200		

Static Electrical Characteristics

Symbol	Parameter	Min	Typ	Max	Unit
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage ($V_{GS} = 0V, I_D = 100\text{mA}$)	170	180		V
$V_{DS(ON)}$	On State Drain Voltage ($I_{D(ON)} = 40\text{A}, V_{GS} = 10\text{V}$)		3.7	5.7	
I_{DSS}	Zero Gate Voltage Drain Current ($V_{DS} = 100\text{V}, V_{GS} = 0\text{V}$)			4.0	mA
I_{GSS}	Gate-Source Leakage Current ($V_{DS} = \pm 20\text{V}, V_{GS} = 0\text{V}$)			4.0	μA
g_{fs}	Forward Transconductance ($V_{DS} = 10\text{V}, I_D = 20\text{A}$)	16			mhos
$V_{GS(TH)}$	Gate Threshold Voltage ($V_{DS} = 10\text{V}, I_D = 100\text{mA}$)	2.9	3.6	4.4	V

Thermal Characteristics

Symbol	Characteristic	Min	Typ	Max	Unit
$R_{\theta JC}$	Junction to Case Thermal Resistance			0.13	$^\circ\text{C}/\text{W}$
$R_{\theta JHS}$	Junction to Sink Thermal Resistance (Use High Efficiency Thermal Joint Compound and Planar Heat Sink Surface.)		0.22		

 **CAUTION:** These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

Dynamic Characteristics

VRF157FL(MP)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
C_{iss}	Input Capacitance	$V_{GS} = 0V$ $V_{DS} = 50V$ $f = 1MHz$		1580		pF
C_{oss}	Output Capacitance			810		
C_{rss}	Reverse Transfer Capacitance			65		





Functional Characteristics

Symbol	Parameter	Min	Typ	Max	Unit
G_{PS}	$f = 30MHz, V_{DD} = 50V, I_{DQ} = 800mA, P_{out} = 600W$	17	21		dB
η_D	$f = 30MHz, V_{DD} = 50V, I_{DQ} = 800mA, P_{out} = 600W_{PEP}$		45		%
$IMD_{(d3)}$	$f1 = 30MHz, f2 = 30.001MHz, V_{DD} = 50V, I_{DQ} = 800mA, P_{out} = 600W_{PEP}$ ¹		-25		dBc
ψ	$f = 30MHz, V_{DD} = 50V, I_{DQ} = 800mA, P_{out} = 600W CW$ 70:1 VSWR - All Phase Angles, 0.2mSec X 20% Duty Factor	No Degradation in Output Power			

1. To MIL-STD-1311 Version A, test method 2204B, Two Tone, Reference Each Tone

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

Typical Performance Curves

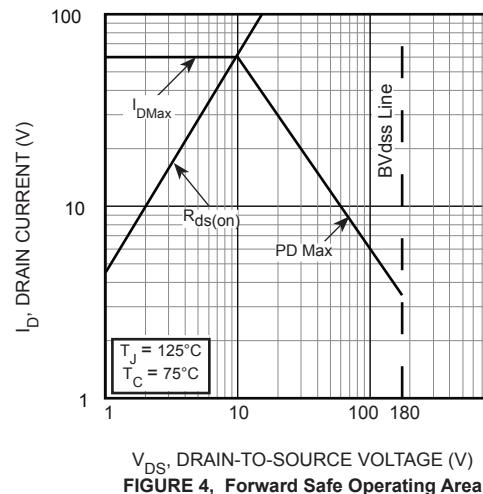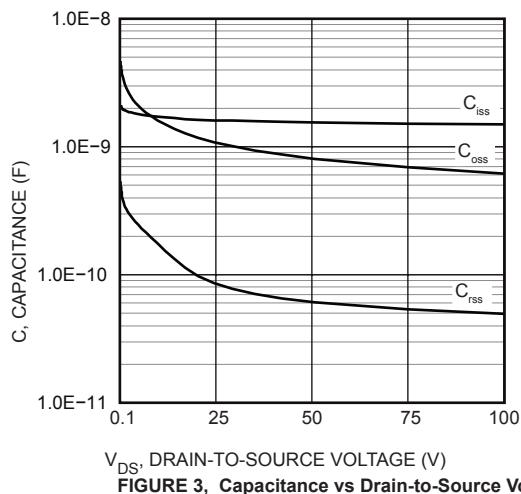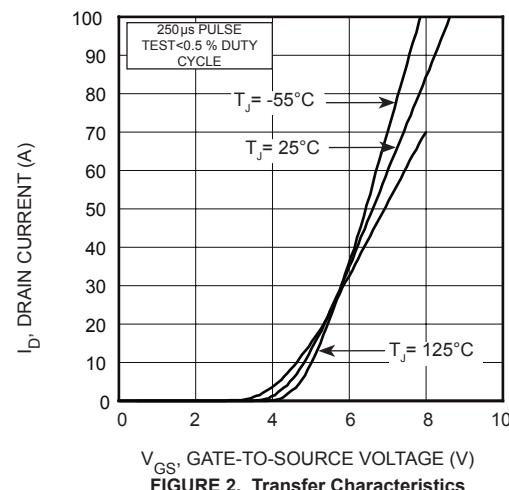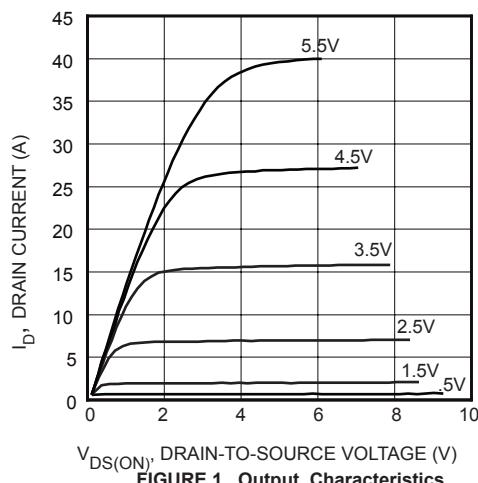





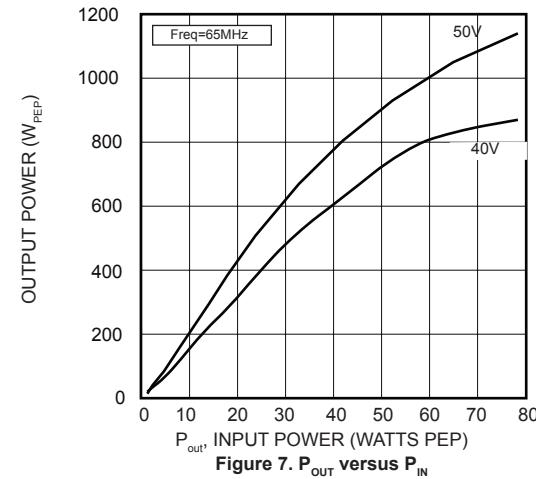


Figure 8. 30MHz Test Circuit

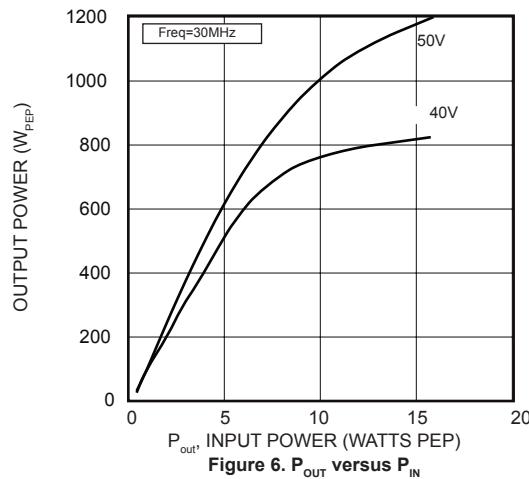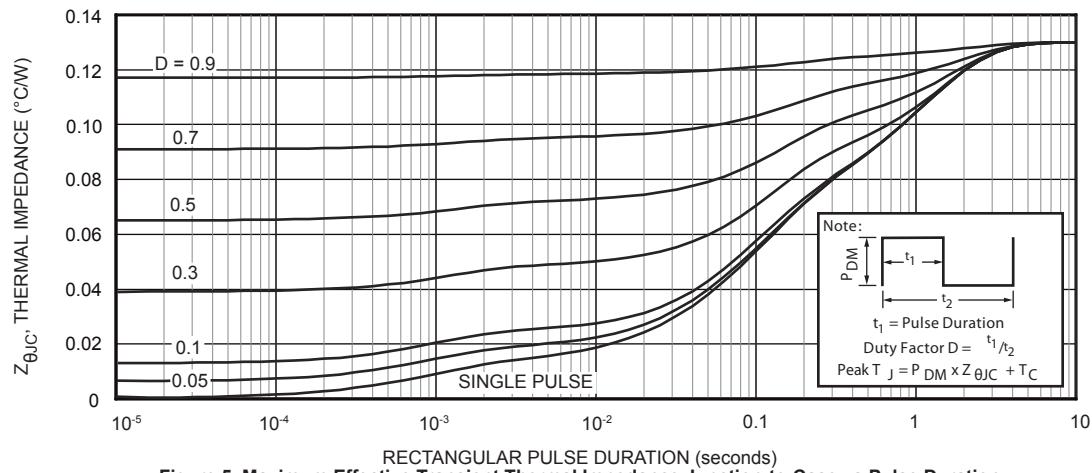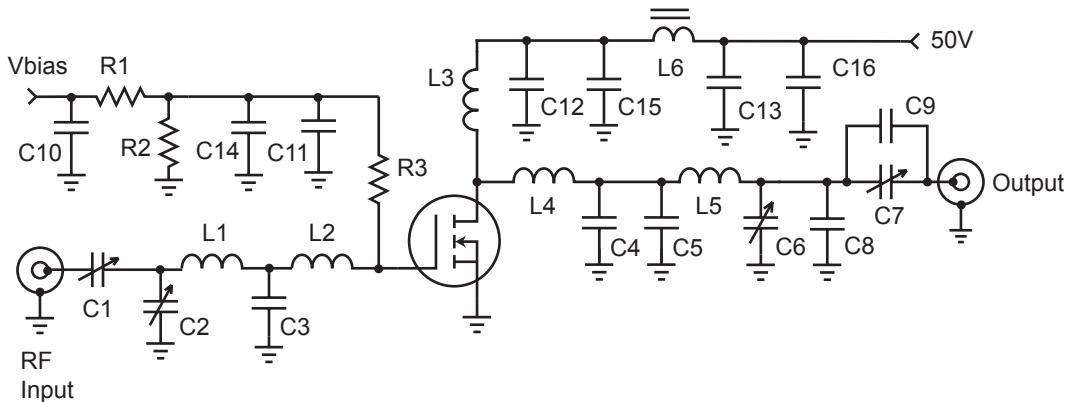

C1, C2, C6, C7 ARCO 465 mica trimmer
 C3 1800pF ATC700B ceramic
 C4 680pF metal clad 500V mica
 C5 390pF metal clad 500V mica
 C8 100pF ATC 700E ceramic
 C9 120pF ATC 700E ceramic
 C10 - C13 .01uF 100V ceramic SMT
 C14 - C16 .1uF 100V ceramic SMT
 L1 110nH 4t #22 0.312" d .30" I
 L2 29nH 2t #22 .188" dia .10" I
 L3 0.3uH - 6t #16 enam. .5" dia.
 L4 22nH - 1t #16 enam. .375" dia.
 L5 117nH - 3t #16 enam. .5" dia. .3" I
 L6 1t #16 on 2x 267300081 .5" bead
 R1-R2 1kΩ 1/4W
 R3 10Ω 1/4W

Figure 9. 2-50MHz 1kW Wideband Amplifier

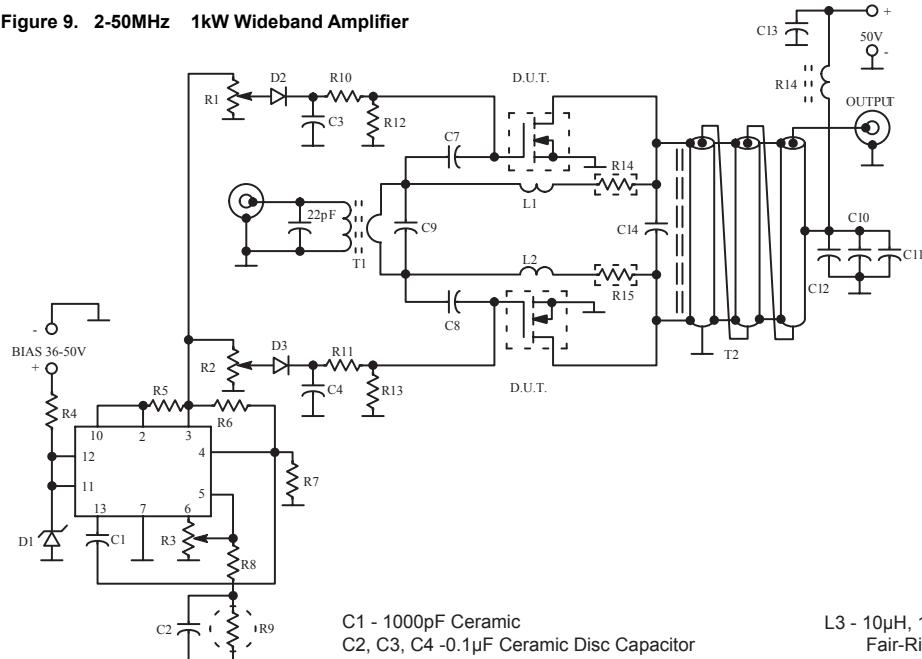

C1 - 1000pF Ceramic
 C2, C3, C4 - 0.1μF Ceramic Disc Capacitor
 C5 - 0.01μF Ceramic Chip Capacitor
 C6, C12 - 0.1μF Ceramic Chip Capacitor
 C7, C8 - Two 2200 pF Ceramic Chip Capacitors in Parallel
 C9 - 820pF Ceramic Chip Capacitor
 C10, C11 - 1000pF Ceramic Chip Capacitor
 C13 - 0.47μF Ceramic Chip Capacitor or Two Smaller Values in Parallel
 C14 - Unencapsulated Mica, 500V Two 1000pF Units in Series, Mounted Under T2
 D1 - IN5357A or Equivalent
 D2, D3 - IN4148 or Equivalent
 C1 - MC1723 (723) Voltage Regulator
 L1, L2 - 15 nH Connecting Wires to R14 and R15, 2.5cm Each #20 AWG

L3 - 10μH, 10 Turns #12 AWG Enamelled Wire on Fair-Rite Products Corp. Ferrite Toroid #5961000401 or Equivalent
 R1, R2 - 1.0K Single Turn Trimpots
 R3 - 10K Single Turn Trimpot
 R4 - 470 Ohms, 2.0 Watts
 R5 - 10 Ohms
 R6, R12, R13 - 2.0K Ohms
 R7 - 10K Ohms
 R8 - Exact Value Depends on Thermistor R9 used (Typically 5.0 - 10K)
 R9 - Thermistor, Keystone RL1009-5820-97-D1 or Equivalent
 R10, R11 - 100 Ohms, 1.0W Carbon
 R14, R15 - EMC Technology Model 5308 or KDI Pyrofilm PPR 970-150-3 Power Resistors, 25 Ohms
 T1, T2 - 9:1 and 1:9 Impedance Ratio RF Transformers

Adding MP at the end of P/N specifies a matched pair where $V_{GS(TH)}$ is matched between the two parts. V_{TH} values are marked on the devices per the following table.

Code	Vth Range	Code 2	Vth Range
A	2.900 - 2.975	M	3.650 - 3.725
B	2.975 - 3.050	N	3.725 - 3.800
C	3.050 - 3.125	P	3.800 - 3.875
D	3.125 - 3.200	R	3.875 - 3.950
E	3.200 - 3.275	S	3.950 - 4.025
F	3.275 - 3.350	T	4.025 - 4.100
G	3.350 - 3.425	W	4.100 - 4.175
H	3.425 - 3.500	X	4.175 - 4.250
J	3.500 - 3.575	Y	4.250 - 4.325
K	3.575 - 3.650	Z	4.325 - 4.400

V_{TH} values are based on Microsemi measurements at datasheet conditions with an accuracy of 1.0%.


Thermal Considerations and Package Mounting:

The rated 1350W power dissipation is only available when the package mounting surface is at 25°C and the junction temperature is 200°C. The thermal resistance between junctions and case mounting surface is 0.13°C/W. When installed, an additional thermal impedance of 0.09°C/W between the package base and the mounting surface is smooth and flat. Thermal joint compound must be used to reduce the effects of small surface irregularities. The heatsink should incorporate a copper heat spreader to obtain best results.

The lid maintains the required mounting pressure while allowing for thermal expansion of both the device and the heat sink. Four 4-40 (M3) screws provide the minimum 125 lb. required mounting force. $T=4.6$ in-lb. Please refer to App Note 1810 "Mounting Instructions for Flangeless Packages."

HAZARDOUS MATERIAL WARNING

The ceramic portion of the device between leads and mounting flange is beryllium oxide. Beryllium oxide dust is highly toxic when inhaled. Care must be taken during handling and mounting to avoid damage to this area. These devices must never be thrown away with general industrial or domestic waste. BeO substrate weight: 1.934g. Percentage of total module weight which is BeO: 20%.

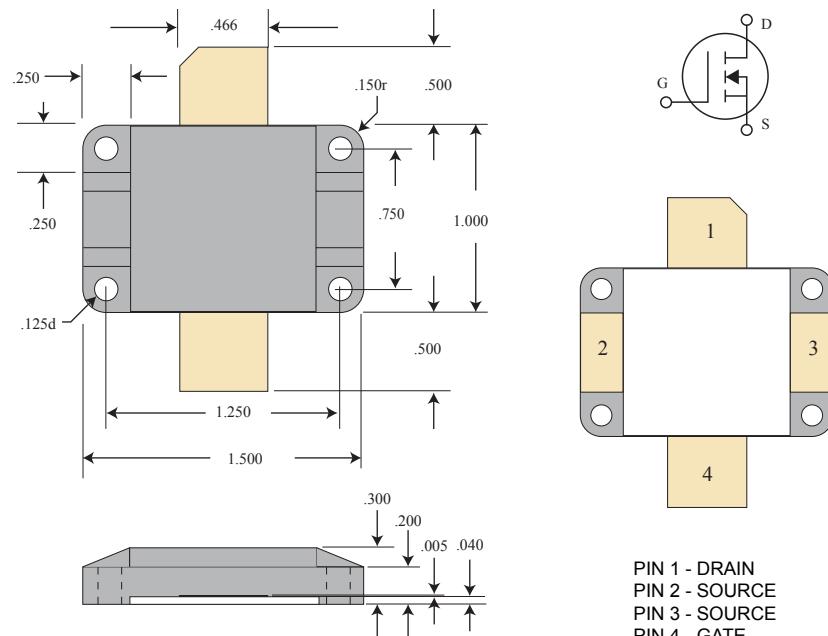

PIN 1 - DRAIN
PIN 2 - SOURCE
PIN 3 - SOURCE
PIN 4 - GATE

**Microsemi Headquarters**

One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113

Outside the USA: +1 (949) 380-6100

Sales: +1 (949) 380-6136

Fax: +1 (949) 215-4996

Email: sales.support@microsemi.com

www.microsemi.com

© 2020 Microsemi. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions; setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at www.microsemi.com.