



CATALOGUE

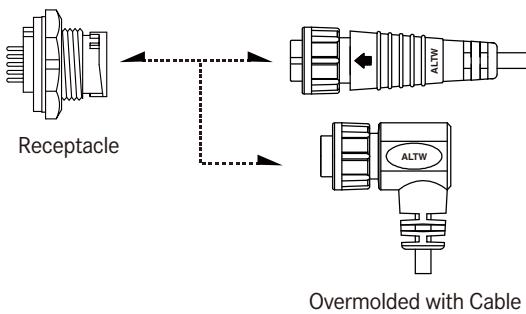
Circular Connector






Range Overview


↳ Receptacle To Overmolded with Cable




↳ Receptacle To Field Installable

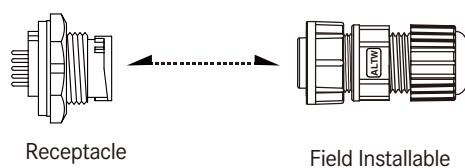

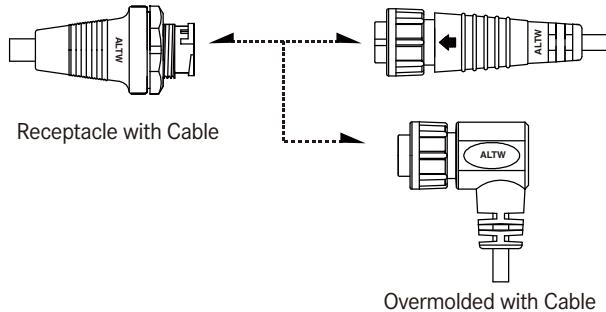
Receptacle with Cable to Overmolded with Cable




In-Line

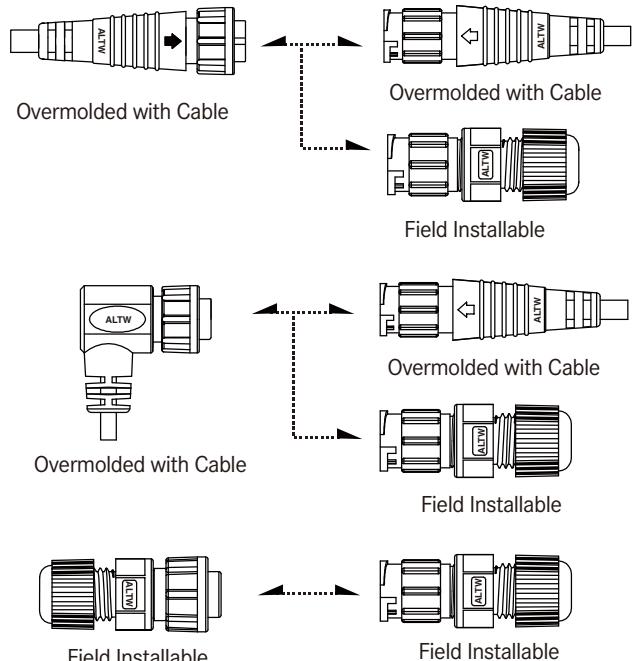

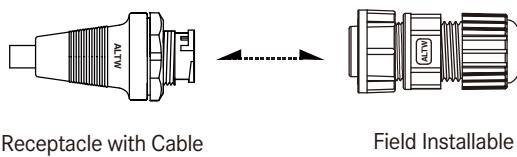
Receptacle with Cable to Field Installable




Accessories



I Adaptor



T Adaptor




T Cable



Wrench




Multi-port



Dust Cap



Waterproof Cap



Dummy

Specification

Identifications	A Size (Mini), B Size (Standard), C Size (Middle), D Size (Large), E Size (Macro)
Description	Receptacle Receptacle with cable Overmolded with Cable Field Installable
Mating Style	2 Points Lock Bayonet, 3 Points Lock Bayonet, Screw Thread, Push Lock
Current Rating / Data	2A, 5A, 10A, 20A, 5A+2A, 10A+2A, 10A+5A, 20A+2A, 20A+5A
Material	Connector Body (Housing) : Nylon+GF, UL Recognized Contacts: Copper Alloy, Gold Plated
Waterproof Rating	IP66~IP68
Temperature Range	Receptacle: -40°C~105°C Receptacle with cable: -20°C~80°C Overmolded with Cable: -20°C~80°C Field installable: -40 °C~105 °C
Contact Resistance	$\leq 10 \text{ m}\Omega$
Insulation Resistance	$\geq 100 \text{ M}\Omega$ at DC500V
Durability	1000 cycles
Dielectric Withstand Voltage	$\geq \text{AC } 1000\text{V} / 1 \text{ minute}$
More to know	Salt Spray Corrosion Test: 48H Standard Cable Length: 01~99M Screw Thread Size: - A Size: 7/16"-28 UNS - B Size: 5/8"-27 UNS - C Size: 13/16"-28 UNS - D Size: 1"-20 UNEF - E Size: 1 3/16"-20 UNS

Ordering Information

1 - 2 3 4 5 6 - 7 8 9 10

Specification / Current Rating

<u>> A Size (Mini)</u>	<u>> C Size (Middle)</u>	<u>> D Size (Large), Metal</u>
(AU) 2A	(CU) 2A	(DSD) 5A
(AD) 5A	(CD) 5A	
	(CB) 10A	<u>> E Size (Macro)</u>
	(CC) 20A	(ED) 5A
<u>> A Size (Mini), Metal</u>		
(ASU) 2A	(CDU) 5A+2A	
(ASD) 5A	(CBU) 10A+2A	
	(CBD) 10A+5A	<u>>Others</u>
<u>> B Size (Standard)</u>	(CGU) 16A+2A*	(GBD) 10A+5A (Between Standard
(BU) 2A		Size & Middle Size)
(BD) 5A	<u>> D Size (Large)</u>	(MAB) 10A (Equivalent to AMP)
(BB) 10A	(DU) 2A	(PLD) 5A (Size 12)
(BDU) 5A+2A	(DD) 5A	
(BBD) 10A+5A	(DC) 20A	
	(DCU) 20A+2A	
	(DCD) 20A+5A	
<u>> B Size (Standard), Metal</u>	(DCB) 20A+10A*	
(BSU) 2A		
(BSD) 5A		
(BSB) 10A		

* Coming soon

Number of Contacts

02, 03....

EX. (02) = 2 Contacts

Connector Body (Style)

<u>> For Receptacle</u>	<u>> For Overmolded with Cable</u>	<u>> For Field installable</u>
(P) Front Fastened	(A) With Strain Relief	(B) Without Strain Relief
(R) Rear Fastened	(B) Without Strain Relief	

Connector (Housing) Gender

(M) Male Connector (F) Female Connector

Contact Gender

(M) Male (D) Female (Power) + Male (Signal)
(F) Female (E) Male (Power) + Female (Signal)

Assemble Style

<u>> For Receptacle</u>	<u>> For Overmolded with Cable</u>
(S) Solder Type	(M) Overmolded with Cable
(B) Screw in Type	<u>> For Field Installable</u>
(P) 180° PCB Type	(A) Field installable (Solder)
(R) 90° PCB Type	(B) Screw in Type

Mating Style

(L) 2 Points Lock Bayonet (T) 3 Points Lock Bayonet
(S) Screw Thread (Q) Push Lock

Backshell

<u>> For Receptacle</u>	<u>> For Overmolded with Cable</u>	<u>> For Field Installable</u>
(C) Circular	(L) Straight	(L) Straight
(S) Square	(R) Right Angle	

Waterproof Rating

(6) IP 66
(7) IP 67
(8) IP 68


More Information

<u>> For Receptacle</u>	<u>> For Overmolded with Cable</u>
(001), (002).....	(□)+(■) : Cable Type + Cable Length
Without Cable : Different Versions	
(□) : Cable Type	(■) : Cable Length
(A) UL2464 Cable	From 1M to 99M
(B) UL2586 Cable	EX. (01) = 1M
(C) Power Cable(TC-ER)	

Physical Dimension


Receptacle

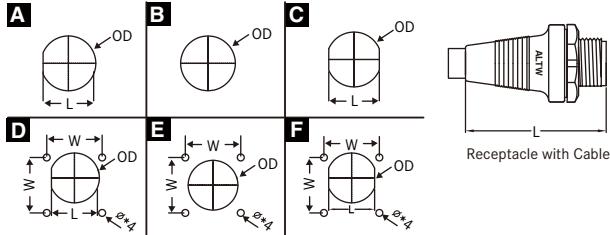Panel Cut-Out



Receptacle with Cable

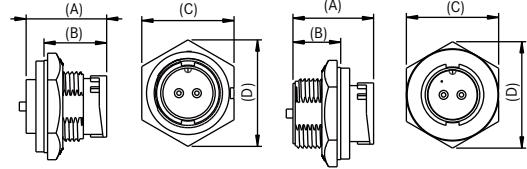Connector Dimension




Current Rating		Dimension		Type	L / W	OD	ϕ	L (Connector Body)
Size	Shield	Conn. Gender		Male				
Mini Size	-	2A(AU)	A	10.4	10.9	-	40.5	
	-	2A(AU)	D	10.4 / 12.7	10.9	3.05	-	
	Shield	2A(ASU)	D	10.4 / 12.7	10.9	3.05	-	
	-	5A(AD)	A	10.4	10.9	-	40.5	
	-	5A(AAD)	A	10.4	10.9	-	-	
	-	5A(AAD)	D	10.4 / 12.7	10.9	3.05	-	
	Shield	5A(ASD)	D	10.4 / 12.7	10.9	3.05	-	
Standard Size	-	2A(BU)	A	14.8	15.6	-	42.6	
	Shield	2A(BSU)	B	-	15.6	-	-	
	Shield	2A(BSU)	C	14.0	16.0	-	-	
	-	5A(BD)	A	14.8	15.6	-	42.6	
	-	5A(ABD)	A	14.8	15.6	-	-	
	Shield	5A(BSD)	B	-	15.6	-	-	
	Shield	5A(BSD)	E	16.0	15.6	3.1	-	
	-	5A+2A(BDU)	A	14.8	15.6	-	42.6	
	-	10A(BB)	A	14.8	15.6	-	42.6	
	-	10A(ABB)	A	14.8	15.6	-	-	
	Shield	10A(BSB)	C	14.1	15.6	-	-	
Middle Size	-	10A+5A(BBD)	A	14.8	15.6	-	42.6	
	-	2A(CU)	A	19.4	20.8	-	-	
	-	5A(CD)	A	19.4	20.8	-	47.0	
	-	5A(ACD)	A	19.4	20.8	-	-	
	-	5A+2A(CDU)	A	19.4	20.8	-	-	
	-	10A(CB)	A	19.4	20.8	-	47.0	
	-	10A(ACB)	A	19.4	20.8	-	-	
	-	10A+2A(CBU)	A	19.4	20.8	-	-	
	-	10A+5A(CBD)	A	19.4	20.8	-	-	
	-	20A(ACC)	A	19.4	20.8	-	-	
	-	20A(CC)	A	19.4	20.8	-	47.0	
	-	20A(CC)	A	19.4	20.8	-	-	
Large Size	-	2A(DU)	A	23.6	25.6	-	-	
	-	5A(DD)	A	23.6	25.6	-	-	
	-	5A(DD)	D	23.6 / 24.4	25.6	3.1	-	
	-	5A(ADD)	A	23.6	25.6	-	-	
	-	5A(ADD)	D	23.6 / 24.4	25.6	3.1	-	
	Shield	5A(DSD)	E	24.5	24.8	2.7	-	
	-	20A(DC)	A	23.6	25.6	-	-	
	-	20A(DC)	D	23.6 / 24.4	25.6	3.1	-	
	-	20A(ADC)	A	23.6	25.6	-	-	
	-	20A(ADC)	D	23.6 / 24.4	25.6	3.1	-	
	-	20A+2A(DCU)	A	23.6	25.6	-	-	
	-	20A+5A(DDC)	A	23.6	25.6	-	-	
Macro Size	-	5A(ED)	D	29.0 / 30.1	30.1	3.5	-	
Others	-	10+5A(GBD)	-	-	-	-	-	
	-	10A(MAB)	-	-	-	-	-	
	-	5A(PLD)	C	11.3	12.8	-	-	

【Note】 Design and specification are subject to change without notice.

Physical Dimension

↳ Overmolded with Cable



with Strain Relief / Straight




without Strain Relief / Straight


Current Rating			Dimension		Type	L		OD	
Size	Shield	Conn. Gender				Female	Male	Female	Male
Mini Size	-	2A(AU)	A			43.5	44.5	15.2	13.5
	-		D			-	-	-	-
	Shield	2A(ASU)	D			-	-	-	-
	-	5A(AD)	A	43.5	44.5	15.2	13.5	-	-
	-	5A(AAD)	A	-	-	-	-	-	-
	-	5A(AAD)	D	-	-	-	-	-	-
	Shield	5A(ASD)	D	-	-	-	-	-	-
Standard Size	-	2A(BU)	A	55.5	59.0	S-20.0/L-18.0	14.6	-	-
	Shield	2A(BSU)	B			-	-	-	-
			C	-	-	-	-	-	-
	-	5A(BD)	A	55.5	59.0	S-20.0/L-18.0	14.6	-	-
	-	5A(ABD)	A	-	-	-	-	-	-
	Shield	5A(BSD)	B			-	-	-	-
			E	-	-	-	-	-	-
	-	5A+2A(BDU)	A	55.5	-	S-20.0/L-18.0	-	-	-
	-	10A(BB)	A	55.5	59.0	S-20.0/L-18.0	14.6	-	-
	-	10A(ABB)	A	-	-	-	-	-	-
	Shield	10A(BSB)	C	-	-	-	-	-	-
	-	10A+5A(BBD)	A	55.5	59.0	S-20.0/L-18.0	14.6	-	-
Middle Size	-	2A(CU)	A	60.0	-	L-22.2/S-25.4	-	-	-
	-	5A(CD)	A	60.0	60.0	L-22.2/S-25.4	20.0	-	-
	-	5A(ACD)	A	60.0	-	L-22.2/S-25.4	-	-	-
	-	5A+2A(CDU)	A	60.5	-	L-22.2/S-25.4	-	-	-
	-	10A(CB)	A	60.0	-	L-22.2/S-25.4	-	-	-
	-	10A(ACB)	A	60.0	-	L-22.2/S-25.4	-	-	-
	-	10A+2A(CBU)	A	60.3	-	23.0	-	-	-
	-	10A+5A(CBD)	A	60.0	-	L-22.2/S-25.4	-	-	-
	-	20A(ACC)	A	60.0	-	L-22.2/S-25.4	-	-	-
	-	20A(CC)	A	60.0	-	L-22.2/S-25.4	-	-	-
Large Size	-	2A(DU)	A	59.5	-	L-22.2/S-25.4	-	-	-
	-	5A(DD)	A	59.5	59.5	S-32.0/L-28.5	22.5	-	-
	-	5A(DD)	D		-	-	-	-	-
	-	5A(ADD)	A	58.5	-	S-32.0/L-28.5	-	-	-
	-	5A(ADD)	D	-	-	-	-	-	-
	Shield	5A(DSD)	E	-	-	-	-	-	-
	-	20A(DC)	A	59.5	-	S-32.0/L-28.5	-	-	-
	-	20A(DC)	D		-	-	-	-	-
	-	20A(ADC)	A	59.5	-	S-32.0/L-28.5	-	-	-
	-	20A(ADC)	D	-	-	-	-	-	-
	-	20A+2A(DCU)	A	63.5	69.7	28.5	22.5	-	-
	-	20A+5A(DCD)	A	71.4	71.4	28.5	22.5	-	-
Macro Size	-	5A(ED)	D	70.0	-	33.3	-	-	-
Others	-	10+5A(GBD)	-	68.7	73.5	26.6	25.0	-	-
	-	10A(MAB)	-	61.5	61.5	23.0	19.4	-	-
	-	5A(PLD)	C	-	-	-	-	-	-

L		OD	
Female	Male	Female	Male
34.0	35.3	15.2	13.5
-	-	-	-
34.0	35.3	15.2	13.5
34.0	-	15.2	-
-	-	-	-
-	-	-	-
43.0	45.0	S-20.0/L-18.0	14.6
37.8	-	19.0	-
43.0	45.0	S-20.0/L-18.0	14.6
43.0	-	S-20.0/L-18.0	-
37.8	-	19.0	-
43.0	-	S-20.0/L-18.0	-
43.0	45.0	S-20.0/L-18.0	14.6
41.8	-	L-22.2/S-25.4	-
41.8	41.8	L-22.2/S-25.4	20.0
-	-	-	-
41.8	-	L-22.2/S-25.4	-
41.8	-	L-22.2/S-25.4	-
-	-	-	-
41.8	-	L-22.2/S-25.4	-
-	-	-	-
41.8	-	L-22.2/S-25.4	-
52.0	-	S-32.0/L-28.5	-
52.0	52.0	S-32.0/L-28.5	22.5
-	-	-	-
-	-	-	-
49.3	-	30.0	-
52.0	-	S32.0 L-28.5	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
60.2	65.0	26.6	25.0
53.0	53.0	23.0	19.4
-	-	-	-


Circular Connector I Physical Dimension Overmolded with Cable I Field Installable



with Strain Relief / Right Angle



without Strain Relief / Right Angle



without Strain Relief / Straight

L [A]		L [B]		OD	
Female	Male	Female	Male	Female	Male
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
34.0	-	35.0	-	S-20.0/L-18.0	-
-	-	-	-	-	-
34.0	-	35.0	-	S-20.0/L-18.0	-
-	-	-	-	-	-
-	-	-	-	-	-
34.0	-	35.0	-	S-20.0/L-18.0	-
34.0	-	35.0	-	S-20.0/L-18.0	-
-	-	-	-	-	-
-	-	-	-	-	-
34.0	-	35.0	-	S-20.0/L-18.0	-
-	-	-	-	-	-
42.5	-	39.5	-	22.2	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
44.1	-	49.8	-	S-32.0/L-28.5	-
-	-	-	-	-	-
-	-	-	-	-	-
40.0	-	40.0	-	30.0	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
44.1	-	49.8	-	28.5	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-

L		OD	
Female	Male	Female	Male
41.5	41.5	15.2	13.5
-	-	-	-
41.5	41.5	15.2	13.5
-	-	-	-
-	-	-	-
-	-	-	-
44.0	43.0	S-20.0/L-18.0	14.6
-	-	-	-
43.0	43.0	S-20.0/L-18.0	14.6
-	-	-	-
-	-	-	-
43.0	-	S-20.0/L-18.0	-
43.0	43.0	S-20.0/L-18.0	14.6
-	-	-	-
-	-	-	-
43.0	43.0	S-20.0/L-18.0	14.6
48.15	-	L-22.2/S-25.4	-
48.15	48.65	L-22.2/S-25.4	20.0
-	-	-	-
-	-	-	-
48.15	-	L-22.2/S-25.4	-
-	-	-	-
49.7	-	23.0	-
-	-	-	-
-	-	-	-
48.15	-	L-22.2/S-25.4	-
-	-	-	-
54.9	54.9	S-32.0/L-28.5	23.0
-	-	-	-
-	-	-	-
-	-	-	-
54.9	54.9	S-32.0/L-28.5	23.0
-	-	-	-
-	-	-	-
62.8	59.3	L-28.5	23.0
59.9	59.9	L-28.5	23.0
-	-	-	-
-	-	-	-
-	-	-	-
39.2	35.3	15.0	15.0

【Note】 Design and specification are subject to change without notice.

Circular Connector I Contact Configuration

Mini Size (2A I 5A)

Standard Size (2A I 5A I 10A+5A)

Contact Configuration

	Mini Size (A)						Standard Size (B)										
	2A(AU)(ASU)		5A(AD)		5A(ASD)		2A(BU)(BSU)		5A(BD)		5A(BSD)		10A(BB)				
4 5	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FM				
2 Pin															MF or FM		
3 Pin																MF or FM	
4 Pin																MF or FM	
5 Pin																	MF or FM
6 Pin																	MF or FM
7 Pin																	
8 Pin																	
9 Pin																	
10 Pin																	
12 Pin																	
14 Pin																	
18 Pin																	
20 Pin																	
21 Pin																	
22 Pin																	
31 Pin																	

* Standard Size Metal (BSU): 10 Contact

Circular Connector I Contact Configuration

Middle Size (2A I 5A I 10A I 20A I 5A+2A I 10A+5A I 10A+2A)

Large Size (2A I 5A I 20A I 20A+2A I 20A+5A)

Contact Configuration


	Middle Size (C)										Large Size (D)			
	10A(CB)		20A(CC)		5A+2A(CDU)		10A+5A(CBD)		10A+2A(CBU)		2A(DU)		5A(DD)(DSD)	
④ ⑤	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM	MM or FF	MF or FM
2 Pin														
3 Pin														
4 Pin														
5 Pin														
6 Pin														
7 Pin														
8 Pin														
9 Pin														
10 Pin														
12 Pin														
14 Pin														
18 Pin														
20 Pin														
21 Pin														
22 Pin														
31 Pin														

Circular Connector I Contact Configuration
Large Size (2A | 5A | 10A | 20A | 20A+2A | 20A+5A)
Macro Size (5A)
Other Size (10A+5A | 10A | 5A)

【Note】 Design and specification are subject to change without notice.

Product Features

↳ Receptacle



Flange ⑧



Circular (C)



Square (S)

Mating Style ⑦



2 Points Lock Bayonet (L)



3 Points Lock Bayonet (T)




Screw Thread (S)




Push Lock (Q)

Connector Body(Style) ③



Rear Fastened (R)




Front Fastened (P)

↳ Overmolded with Cable



Backshell ⑧



Straight (L)



Right Angle (R)

Mating Style ⑦



2 Points Lock Bayonet (L)



3 Points Lock Bayonet (T)



Screw Thread (S)



Push Lock (Q)

Connector Body(Style) ③




With Strain Relief (A)




Without Strain Relief (B)

↳ Field Installable



Backshell ⑧



Straight (L)

Mating Style ⑦



2 Points Lock Bayonet (L)



3 Points Lock Bayonet (T)




Screw Thread (S)



Push Lock (Q)



Connector Body(Style) ③



Without Strain Relief (B)

Find Our Standard Products



▽ Mini Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 		 		Field Installable
Current Rating (Code)	Contacts 2	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
2A (AU)	04,05,06	AU- 2 AMMM-LL6AXX* AU- 2 BMMM-LL7AXX*	AU- 2 AFFM-LL6AXX* AU- 2 BFFM-LL7AXX* AU- 2 BFFM-LR6AXX*	AU- 2 BFFA-LL7001
5A (AD)	02,03	AD- 2 AMMM-LL6AXX* AD- 2 BMMM-LL7AXX*	[A]AD- 2 BFFM-LL7AXX* AD- 2 BFFM-LR6AXX*	AD- 2 BFFA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin

▽ Mini Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Female Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 		 		Field Installable
Current Rating (Code)	Contacts 2	Female Connector (F) Female Contacts (F)	Male Connector (M) Male Contacts (M)	Male Connector (M) Male Contacts (M)
2A (AU)	04,05,06	AU- 2 AFFM-LL6AXX* AU- 2 BFFM-LL7AXX* AU- 2 BFFM-LR6AXX*	AU- 2 AMMM-LL6AXX* AU- 2 BMMM-LL7AXX*	AU- 2 BMMA-LL7001
5A (AD)	02,03	[A]AD- 2 BFFM-LL7AXX* AD- 2 BFFM-LR6AXX*	AD- 2 AMMM-LL6AXX* AD- 2 BMMM-LL7AXX*	AD- 2 BMMA-LL7001

* XX: Choose the cable length from 01~99m



** [A] Stamp pin

Circular Connector I Find Our Standard Products

Mini Size: Screw Thread and 2 Points Lock Bayonet

Receptacle and Mating Pair | Receptacle with Overmolded Cable and Mating Pair

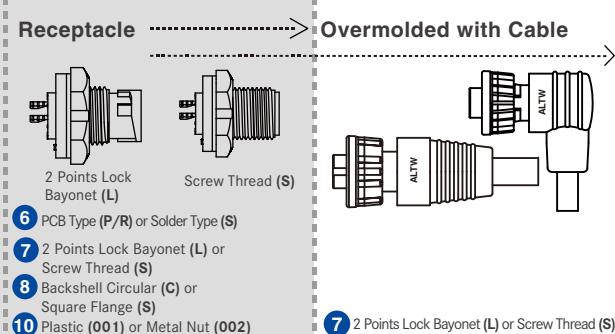

▽ Mini Size: 7/16"-28 UNS and 2 Points Lock Bayonet > Receptacle and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • Screw Thread & 2 Points Lock Bayonet • Front Fastened 	 <p>Receptacle > Overmolded with Cable</p> <p>2 Points Lock Bayonet (L) Screw Thread (S)</p> <p>6 PCB Type (P/R) or Solder Type (S) 7 2 Points Lock Bayonet (L) or Screw Thread (S) 8 Backshell Circular (C) or Square Flange (S) 10 Plastic (001) or Metal Nut (002)</p> <p>7 2 Points Lock Bayonet (L) or Screw Thread (S) 7 2 Points Lock Bayonet (L) or Screw Thread (S)</p>	<p>Field Installable</p> 
---	--	--

Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
2A (AU)	04,05,06	AU-②PMM ⑥-⑦⑧ 7001 AU-②RMMS-⑦C7001	AU-②AFFM-⑦L6AXX* AU-②BFFM-⑦L7AXX* AU-②BFFM-⑦R6AXX*	AU-②BFFA-⑦L7001
2A (ASU) *Metal	04,05,06	ASU-②PMMS-LS7⑩	AU-②AFFM-LL6AXX* AU-②BFFM-LL7AXX* AU-②BFFM-LR6AXX*	AU-②BFFA-LL7001
5A (AD)	02,03	AD-②PMMMP-⑦⑧ 7001 [A]AD-②PMMS-⑦⑧ 7001 [A]DD-②RMMS-⑦C7001	[A]AD-②BFFM-⑦L7AXX* AD-②BFFM-⑦R6AXX*	AD-②BFFA-⑦L7001
5A (ASD) *Metal	02,03	ASD-②PMM ⑥-LS7⑩	[A]AD-②BFFM-LL7AXX* AD-②BFFM-LR6AXX*	AD-②BFFA-LL7001



* XX: Choose the cable length from 01~99m ** [A] Stamp pin

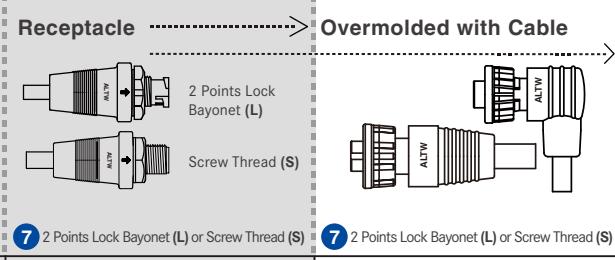▽ Mini Size: 7/16"-28 UNS and 2 Points Lock Bayonet > Receptacle with Overmolded Cable and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • Screw Thread & 2 Points Lock Bayonet 	 <p>Receptacle > Overmolded with Cable</p> <p>2 Points Lock Bayonet (L) Screw Thread (S)</p> <p>7 2 Points Lock Bayonet (L) or Screw Thread (S) 7 2 Points Lock Bayonet (L) or Screw Thread (S) 7 2 Points Lock Bayonet (L) or Screw Thread (S)</p>	<p>Field Installable</p> 		
Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
2A (AU)	04,05,06	AU-②PMMM-⑦L7AXX*	AU-②AFFM-⑦L6AXX* AU-②BFFM-⑦L7AXX* AU-②BFFM-⑦R6AXX*	AU-②BFFA-⑦L7001
5A (AD)	02,03	AD-②PMMM-⑦L7AXX*	[A]AD-②BFFM-⑦L7AXX* AD-②BFFM-⑦R6AXX*	AD-②BFFA-⑦L7001

* XX: Choose the cable length from 01~99m ** [A] Stamp pin


↳ Standard Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 				Field Installable
Current Rating (Code)	Contacts 2	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
2A (BU)	10,12	BU- 2 AMMM-LL6AXX* BU- 2 BMMM-LL7AXX*	BU- 2 AFFM-LL6AXX* BU- 2 AFFM-LR7AXX* BU- 2 BFFM-LL7AXX* BU- 2 BFFM-LR6AXX*	BU- 2 BFFA-LL7001
5A (BD)	02,03,04, 05,06,07,08	BD- 2 AMMM-LL6AXX* BD- 2 BMMM-LL7AXX*	[A]BD- 2 BFFM-LL7AXX* BD- 2 AFFM-LR7AXX* BD- 2 BFFM-LR6AXX*	BD- 2 BFFA-LL7001
10A (BB)	02,03,04	BB- 2 AMMM-LL6AXX* BB- 2 BMMM-LL7AXX*	[A]BB- 2 BFFM-LL7AXX* BB- 2 AFFM-LR7AXX* BB- 2 BFFM-LR6AXX*	BB- 2 BFFA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin

↳ Standard Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 				Field Installable
Current Rating (Code)	Contacts 2	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
2A (BU)	10,12	BU- 2 BMMA-LL7001	BU- 2 AFFM-LL6AXX* BU- 2 AFFM-LR7AXX* BU- 2 BFFM-LL7AXX* BU- 2 BFFM-LR6AXX*	BU- 2 BFFA-LL7001
5A (BD)	02,03,04, 05,06,07,08	BD- 2 BMMA-LL7001	[A]BD- 2 BFFM-LL7AXX* BD- 2 AFFM-LR7AXX* BD- 2 BFFM-LR6AXX*	BD- 2 BFFA-LL7001
10A (BB)	02,03,04	BB- 2 BMMA-LL7001	[A]BB- 2 BFFM-LL7AXX* BB- 2 AFFM-LR7AXX* BB- 2 BFFM-LR6AXX*	BB- 2 BFFA-LL7001

* XX: Choose the cable length from 01~99m




** [A] Stamp pin

Circular Connector I Find Our Standard Products

Standard Size: 2 Points Lock Bayonet

In-Line



Standard Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Female Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 				
Current Rating (Code)	Contacts 2	Female Connector (F) Female Contacts (F)	Male Connector (M) Male Contacts (M)	Male Connector (M) Male Contacts (M)
2A (BU)	10,12	BU- 2 AFFM-LL6AXX* BU- 2 AFFM-LR7AXX* BU- 2 BFFM-LL7AXX* BU- 2 BFFM-LR6AXX*	BU- 2 AMMM-LL6AXX* BU- 2 BMMM-LL7AXX*	BU- 2 BMMA-LL7001
5A (BD)	02,03,04, 05,06,07,08	[A]BD- 2 BFFM-LL7AXX* BD- 2 AFFM-LR7AXX* BD- 2 BFFM-LR6AXX*	BD- 2 AMMM-LL6AXX* BD- 2 BMMM-LL7AXX*	BD- 2 BMMA-LL7001
10A (BB)	02,03,04	[A]BB- 2 BFFM-LL7AXX* BB- 2 AFFM-LR7AXX* BB- 2 BFFM-LR6AXX*	BB- 2 AMMM-LL6AXX* BB- 2 BMMM-LL7AXX*	BB- 2 BMMA-LL7001

* XX: Choose the cable length from 01~99m


** [A] Stamp pin

Standard Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Female Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 				
Current Rating (Code)	Contacts 2	Female Connector (F) Female Contacts (F)	Male Connector (M) Male Contacts (M)	Male Connector (M) Male Contacts (M)
2A (BU)	10,12	BU- 2 BFFA-LL7001	BU- 2 AMMM-LL6AXX* BU- 2 BMMM-LL7AXX*	BU- 2 BMMA-LL7001
5A (BD)	02,03,04, 05,06,07,08	BD- 2 BFFA-LL7001	BD- 2 AMMM-LL6AXX* BD- 2 BMMM-LL7AXX*	BD- 2 BMMA-LL7001
10A (BB)	02,03,04	BB- 2 BFFA-LL7001	BB- 2 AMMM-LL6AXX* BB- 2 BMMM-LL7AXX*	BB- 2 BMMA-LL7001

* XX: Choose the cable length from 01~99m

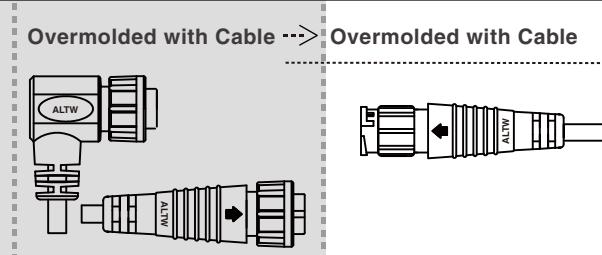↳ Standard Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Female Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 			Field Installable	
Current Rating (Code)	Contacts 2	Female Connector (F) Male Contacts (M)	Male Connector (M) Female Contacts (F)	Male Connector (M) Female Contacts (F)
5A (BD)	02,03,04, 05,06	[A]BD- 2 BFMM-LL7AXX* BD- 2 AFMM-LR7AXX* BD- 2 BFMM-LR6AXX*	BD- 2 AMFM-LL6AXX* BD- 2 BMFM-LL7AXX*	BD- 2 BMFA-LL7001
10A (BB)	02,03	[A]BB- 2 BFMM-LL7AXX* BB- 2 AFMM-LR7AXX* BB- 2 BFMM-LR6AXX*	BB- 2 PMFM-LL7AXX*	-
5A+2A (BDU)	08 (2+6)	BDU-08AFMM-LL6AXX* BDU-08AFMM-LR7AXX* BDU-08BFMM-LL7AXX*	BDU-08PMFM-LL7AXX*	-
10A+5A (BBB)	06 (2+4)	BBD- 2 AFMM-LL6AXX* BBD- 2 AFMM-LR7AXX* BBD- 2 BFMM-LL7AXX* BBD- 2 BFMM-LR6AXX*	BBD-06PMFM-LL7AXX*	BBD-06BMFA-LL7001

【Note】 BDU-08AMFM-LL6AXX and BDU-08BMFM-LL7AXX are coming soon.

* XX: Choose the cable length from 01~99m




** [A] Stamp pin

↳ Standard Size: 5/8"-27 UNS and 2 Points Lock Bayonet >
Receptacle and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • Screw Thread & 2 Points Lock Bayonet • Front Fastened & Rear Fastened 		Receptacle	Overmolded with Cable	Field Installable
Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
2A (BU)	10, 12	BU-②PMM ⑥-⑦C7001 BU-②RMMS-⑦C7001	BU-②AFFM-⑦L6AXX* BU-②AFFM-⑦R7AXX* BU-②BFFM-⑦L7AXX* BU-②BFFM-LR6AXX*	BU-②BFFA-⑦L7001
2A (BSU) *Metal	10	BSU-②PMM ⑥-SC7001 BSU-②RMMS-SC7001	BSU-10BFFM-SL7AXX* BSU-10BFFM-SR6AXX*	-
5A (BD)	02,03,04,05, 06,07,08	BD-②PMM P-⑦C7001 BD-②PMMR-⑦C7001 [A]BD-②PMMS-⑦C7001 [A]BD-②RMMS-⑦C7001	[A]BD-②BFFM-⑦L7AXX* BD-②AFFM-⑦R7AXX* BD-②BFFM-⑦R6AXX*	BD-②BFFA-⑦L7001
5A (BSD)	04,05,06, 07,08	BSD-②PMM ⑥-SC7001 BSD-06RMMS-SC7001 BSD-08RMMS-SC7001	BSD-②BFFM-SL6AXX* BSD-②BFFM-SR6AXX*	-
10A (BB)	02,03,04	[A]BB-②PMMS-⑦C7001 [A]BB-②RMMS-⑦C7001	[A]BB-②BFFM-⑦L7AXX* BB-②AFFM-⑦R7AXX* BB-②BFFM-⑦R6AXX*	BB-②BFFA-⑦L7001
10A (BSB) *Metal	04	BSB-04RMMS-SC7001	BSB-04BFFM-SL7AXX*	-

* XX: Choose the cable length from 01~99m
** [A] Stamp pin

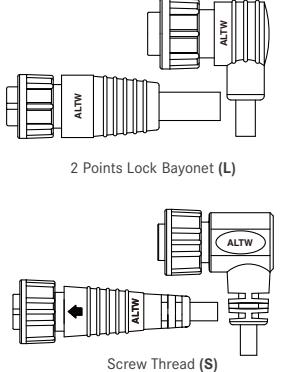↙ **Standard Size: 5/8"-27 UNS and 2 Points Lock Bayonet >**
Receptacle with Overmolded Cable and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • Screw Thread & 2 Points Lock Bayonet 	 <p>Receptacle</p> <p>Screw Thread (S)</p> <p>2 Points Lock Bayonet (L)</p>	 <p>Overmolded with Cable</p> <p>2 Points Lock Bayonet (L)</p> <p>Screw Thread (S)</p>	 <p>Field Installable</p>
		<p>7 2 Points Lock Bayonet (L) or Screw Thread (S)</p>	<p>7 2 Points Lock Bayonet (L) or Screw Thread (S)</p>
		<p>7 2 Points Lock Bayonet (L) or Screw Thread (S)</p>	
Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
2A (BU)	10,12	BU- ② PMMM- ⑦ L7AXX*	BU- ② AFFM- ⑦ L6AXX* BU- ② AFFM- ⑦ R7AXX* BU- ② BFFM- ⑦ L7AXX* BU- ② BFFM- ⑦ R6AXX*
5A (BD)	02,03,04, 05,06,07,08	BD- ② PMMM- ⑦ L7AXX*	[A]BD- ② BFFM- ⑦ L7AXX* BD- ② AFFM- ⑦ R7AXX* BD- ② BFFM- ⑦ R6AXX*
10A (BB)	02,03,04	BB- ② PMMM- ⑦ L7AXX*	[A]BB- ② BFFM- ⑦ L7AXX* BB- ② AFFM- ⑦ R7AXX* BB- ② BFFM- ⑦ R6AXX*

* XX: Choose the cable length from 01~99m

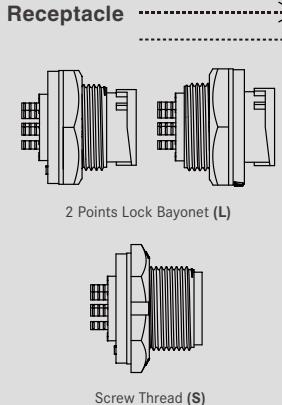
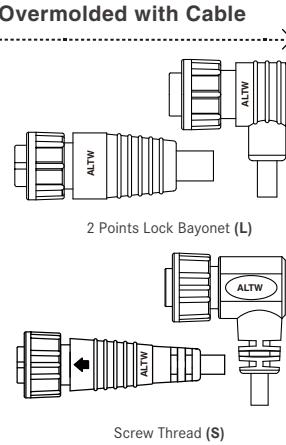
** [A] Stamp pin

Circular Connector I Find Our Standard Products

Standard Size: Screw Thread and 2 Points Lock Bayonet

Receptacle and Mating Pair



↳ Standard Size: 5/8"-27 UNS and 2 Points Lock Bayonet > Receptacle and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Contacts • Screw Thread & 2 Points Lock Bayonet • Front Fastened & Rear Fastened 				
	6 PCB Type (P/R) or Solder Type (S) 7 2 Points Lock Bayonet (L) or Screw Thread (S)	7 2 Points Lock Bayonet (L) or Screw Thread (S)	7 2 Points Lock Bayonet (L) or Screw Thread (S)	
Current Rating (Code)	Contacts 2	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	Female Connector (F) Male Contacts (M)
5A (BD)	02,03,04, 05,06	BD- 2 PMFP- 7 C7001 [A]BD- 2 PMFS- 7 C7001 [A]BD- 2 RMFS- 7 C7001	[A]BD- 2 BFMM- 7 L7AXX* BD- 2 AFMM- 7 R7AXX* BD- 2 BFMM- 7 R6AXX*	BD- 2 BFMA- 7 L7001
10A (BB)	02,03	BB- 2 PMFP- 7 C7001 [A]BB- 2 PMFS- 7 C7001 [A]BB- 2 RMFS- 7 C7001	[A]BB- 2 BFMM- 7 L7AXX* BB- 2 AFMM- 7 R7AXX* BB- 2 BFMM- 7 R6AXX*	BB- 2 BFMA- 7 L7001
5A+2A (BDU)	08 (2+6)	BDU-08PMF 6 - 7 C7001 BDU-08RMFS- 7 C7001	BDU-08AFMM- 7 L6AXX* BDU-08AFMM- 7 R7AXX* BDU-08BFMM- 7 L7AXX*	BDU-08BFMA- 7 L7001
10A+5A (BBD)	06 (2+4)	BBD-06PMF 6 - 7 C7001 BBD-06RMFS- 7 C7001	BBD-06AFMM- 7 L6AXX* BBD-06AFMM- 7 R7AXX* BBD-06BFMM- 7 L7AXX* BBD-06BFMM- 7 R6AXX*	BBD-06BFMA- 7 L7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin




▽ Middle Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 				
Current Rating (Code)	Contacts 2	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
5A (CD)	07,08,09, 10,12,14	CD- 2 AMMM-LL7AXX* CD- 2 BMMM-LL6AXX*	[A]CD- 2 AFFM-LL7AXX* CD- 2 AFFM-LR7AXX*	CD- 2 BFFA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin




▽ Middle Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 				
Current Rating (Code)	Contacts 2	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
5A (CD)	07,08,09, 10,12,14	CD- 2 BMMA-LL7001	[A]CD- 2 AFFM-LL7AXX* CD- 2 AFFM-LR7AXX*	CD- 2 BFFA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin

▽ Middle Size: 2 Points Lock Bayonet > In-Line




<ul style="list-style-type: none"> • Female Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 				
Current Rating (Code)	Contacts 2	Female Connector (F) Female Contacts (F)	Male Connector (M) Male Contacts (M)	Male Connector (M) Male Contacts (M)
5A (CD)	07,08,09, 10,12,14	[A]CD- 2 AFFM-LL7AXX* CD- 2 AFFM-LR7AXX*	CD- 2 AMMM-LL7AXX* CD- 2 BMMM-LL6AXX*	CD- 2 BMMA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin




【Note】 Design and specification are subject to change without notice.

▽ Middle Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Female Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 		Field Installable 	Overmolded with Cable 	Field Installable 
Current Rating (Code)	Contacts ②	Female Connector (F) Female Contacts (F)	Male Connector (M) Male Contacts (M)	Male Connector (M) Male Contacts (M)
5A (CD)	07,08,09, 10,12,14	CD-②BFFA-LL7001	CD-②AMMM-LL7AXX* CD-②BMMM-LL6AXX*	CD-②BMMA-LL7001

* XX: Choose the cable length from 01~99m



▽ Middle Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 		Overmolded with Cable 	Overmolded with Cable 	Field Installable 
Current Rating (Code)	Contacts ②	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	Female Connector (F) Male Contacts (M)
5A (CD)	07,08,09	CD-②AMFM-LL7AXX* CD-②BMFM-LL6AXX*	[A]CD-②AFMM-LL7AXX*	CD-②BFMA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin


▽ Middle Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Female Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 		Overmolded with Cable 	Overmolded with Cable 	Field Installable 
Current Rating (Code)	Contacts ②	Female Connector (F) Male Contacts (M)	Male Connector (M) Female Contacts (F)	Male Connector (M) Female Contacts (F)
5A (CD)	07,08,09	[A]CD-②AFMM-LL7AXX*	CD-②AMFM-LL7AXX* CD-②BMFM-LL6AXX*	CD-②BMFA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin

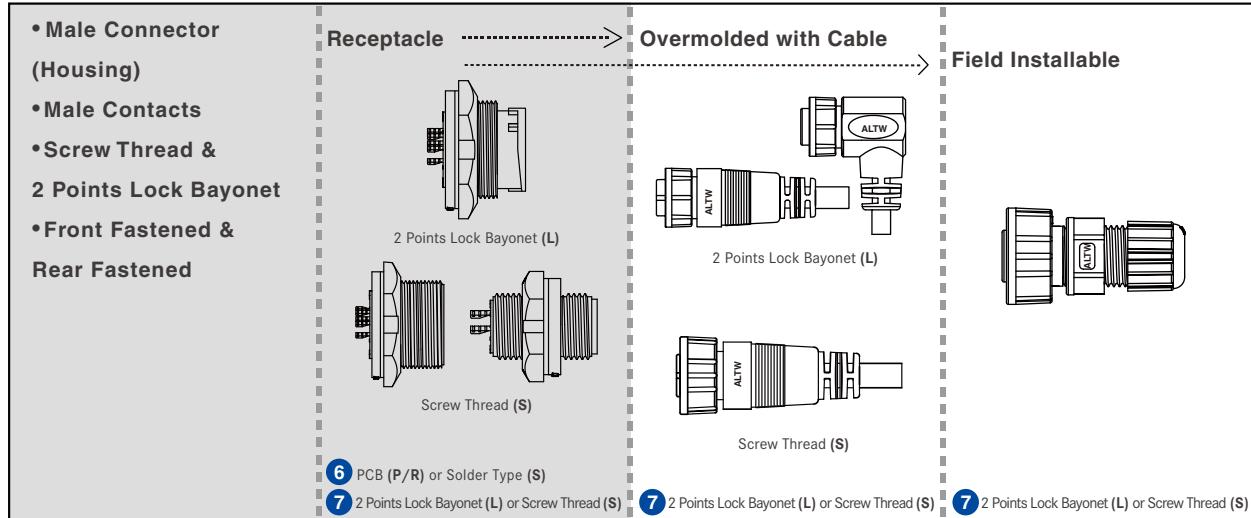△ Middle Size: 13/16"-28 UNS and 2 Points Lock Bayonet > Receptacle and Mating Pair



Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
2A (CU)	18	CU-18PMMP-⑦C7001 CU-18PMMP-SC7002	CU-18AFFM-⑦L7AXX* CU-18BFFM-⑦L6AXX*	CU-18BFFA-⑦L7001
5A (CD)	07,08,09, 10,12,14	CD-②PMMP-⑦C7001 [A]CD-②PMMS-⑦C7001 [A]CD-②RMMS-⑦C7001	[A]CD-②AFFM-⑦L7AXX* CD-②AFFM-LR7AXX*	CD-②BFFA-⑦L7001
10A (CB)	04,05,06	CB-②PMMP-⑦C7001 [A]CB-②PMMS-⑦C7001 [A]CB-②RMMS-⑦C7001	[A]CB-②AFFM-⑦L7AXX*	CB-②BFFA-⑦L7001
10A+5A (CBD)	08 (2+6)	CBD-08PMM ⑥ - ⑦C7001	CBD-08AFFM-⑦L7AXX* CBD-08BFFM-⑦L6AXX*	CBD-08BFFA-⑦L7001
20A (CC)	03	[A]CC-03PMMS-⑦C7001 [A]CC-03RMMS-LC7001 CC-03RMMS-⑦C7001	[A]CC-03AFFM-⑦L7AXX*	CC-03BFFA-⑦L7001

* XX: Choose the cable length from 01~99m




** [A] Stamp pin

Circular Connector I Find Our Standard Products






Middle Size: Screw Thread and 2 Points Lock Bayonet

Receptacle with Overmolded Cable and Mating Pair

▽ Middle Size: 13/16"-28 UNS and 2 Points Lock Bayonet > Receptacle with Overmolded Cable and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • Screw Thread & 2 Points Lock Bayonet 	<p>Receptacle</p>  <p>2 Points Lock Bayonet (L)</p> <p>Screw Thread (S)</p>	<p>Overmolded with Cable</p>  <p>2 Points Lock Bayonet (L)</p> <p>Screw Thread (S)</p>	<p>Field Installable</p> 
<p>Current Rating (Code)</p>	<p>Contacts 2</p>	<p>Male Connector (M) Male Contacts (M)</p>	<p>Female Connector (F) Female Contacts (F)</p>
<p>5A (CD)</p>	<p>07,08,09, 10,12,14</p>	<p>CD-2PMMM-7L7AXX*</p>	<p>[A]CD-2AFFM-7L7AXX* CD-2AFFM-LR7AXX*</p>
<p>10A (CB)</p>	<p>04,05,06</p>	<p>CB-2PMMM-7L7AXX*</p>	<p>[A]CB-2AFFM-7L7AXX*</p>
<p>20A (CC)</p>	<p>03</p>	<p>CC-03PMMM-SL7AXX*</p>	<p>[A]CC-03AFFM-SL7AXX*</p>
			<p>* XX: Choose the cable length from 01~99m ** [A] Stamp pin</p>

↳ Middle Size: 13/16"-28 UNS and 2 Points Lock Bayonet >
 Receptacle and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Contacts • Screw Thread & 2 Points Lock Bayonet • Rear Fastened 	Receptacle	Overmolded with Cable	Field Installable	
	 2 Points Lock Bayonet (L)  Screw Thread (S) 6 PCB (P/R) or Solder Type (S) 7 2 Points Lock Bayonet (L) or Screw Thread (S)	 2 Points Lock Bayonet (L)  Screw Thread (S) 7 2 Points Lock Bayonet (L) or Screw Thread (S)	 7 2 Points Lock Bayonet (L) or Screw Thread (S)	
Current Rating (Code)	Contacts 2	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	
5A (CD)	07,08,09	CD- 2 PMFP- 7 C7001 [A]CD- 2 PMFS- 7 C7001 [A]CD- 2 RMFS- 7 C7001	[A]CD- 2 AFMM- 7 L7AXX* CDU- 2 PMF 6 - 7 C7001	CD- 2 BFMA- 7 L7001
5A+2A (CDU)	12 (2+10) 14 (2+12)	CDU- 2 PMF 6 - 7 C7001	CDU- 2 AFMM- 7 L7AXX* CDU- 2 BFMM- 7 L6AXX* CDU- 2 BFMM- 7 L7AXX*	CDU- 2 BFMA- 7 L7001
10A (CB)	04,05	CB- 2 PMFP- 7 C7001 [A]CB- 2 PMFS- 7 C7001 [A]CB- 2 RMFS- 7 C7001	[A]CB- 2 AFMM- 7 L7AXX* CB- 2 BFMA- 7 L7001	CB- 2 BFMA- 7 L7001
10A+5A (CBD)	08 (2+6)	CBD-08PMF 6 - 7 C7001	CBD-08AFMM- 7 L7AXX* CBD-08BFMM- 7 L6AXX*	CBD-08BFMA- 7 L7001
20A (CC)	02	CC-02PMFS-LC7001	CC-02AFMM-LL7AXX*	-







* XX: Choose the cable length from 01~99m
 ** [A] Stamp pin

Circular Connector I Find Our Standard Products

Middle Size: Screw Thread and 2 Points Lock Bayonet

Receptacle with Overmolded Cable and Mating Pair




▽ Middle Size: 13/16"-28 UNS and 2 Points Lock Bayonet > Receptacle with Overmolded Cable and Mating Pair

• Male Connector (Housing)	Receptacle	Overmolded with Cable	Field Installable	
• Female Contacts				
• Screw Thread & 2 Points Lock Bayonet				
	 2 Points Lock Bayonet (L)	 2 Points Lock Bayonet (L)	 2 Points Lock Bayonet (L) or Screw Thread (S)	
	 Screw Thread (S)	 Screw Thread (S)	 2 Points Lock Bayonet (L) or Screw Thread (S)	
	⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)			
	⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)			
	⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)			
Current Rating (Code)	Contacts ②	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	Female Connector (F) Male Contacts (M)
5A (CD)	07,08,09	CD- ② PMFM- ⑦ L7AXX*	[A]CD- ② AFMM- ⑦ L7AXX*	CD- ② BFMA- ⑦ L7001
10A (CB)	04,05	CB- ② PMFM- ⑦ L7AXX*	[A]CB- ② AFMM- ⑦ L7AXX*	CB- ② BFMA- ⑦ L7001

* XX: Choose the cable length from 01~99m




** [A] Stamp pin

↳ Middle Size: 3 Points Lock Bayonet > Receptacle and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Power+Male Signal • 3 Points Lock Bayonet • Front Fastened 	 <p>Receptacle</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>	
Current Rating (Code)	Contacts	Male Connector (M) Female Power+Male Signal (D)	Female Connector (F) Male Power+Female Signal (E)	Female Connector (F) Male Power+Female Signal (E)
10A+2A (CBU)	08 (3+5)	CBU-08PMDS-TC7001	CBU-08AFEM-TL7AXX*	CBU-08BFEA-TL7001

* XX: Choose the cable length from 01~99m

↳ Middle Size: 3 Points Lock Bayonet > Receptacle and Mating Pair




<ul style="list-style-type: none"> • Male Connector (Housing) • Male Power+Female Signal • 3 Points Lock Bayonet • Front Fastened 	 <p>Receptacle</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>	
Current Rating (Code)	Contacts	Male Connector (M) Male Power+Female Signal (E)	Female Connector (F) Female Power+Male Signal (D)	Female Connector (F) Female Power+Male Signal (D)
10A+2A (CBU)	08 (3+5)	CBU-08PMES-TC7001	CBU-08AFDM-TL7AXX*	CBU-08BFDA-TL7001

* XX: Choose the cable length from 01~99m

Large Size: 2 Points Lock Bayonet

In-Line


▽ Large Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • 2 Points Lock Bayonet 		 <p>Overmolded with Cable</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>
Current Rating (Code)	Contacts	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
5A (DD)	18	DD-18AMMM-LL7AXX* DD-18BMMM-LL6AXX*	[A]DD-18AFFM-LL7AXX* DD-18AFFM-LR7AXX*	DD-18BFFA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin



▽ Large Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Female Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 		 <p>Overmolded with Cable</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>
Current Rating (Code)	Contacts	Female Connector (F) Female Contacts (F)	Male Connector (M) Male Contacts (M)	Male Connector (M) Male Contacts (M)
5A (DD)	18	[A]DD-18AFFM-LL7AXX* DD-18AMMM-LL7AXX*	DD-18AMMM-LL7AXX* DD-18BMMM-LL6AXX*	DD-18BMMA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin

▽ Large Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 		 <p>Overmolded with Cable</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>
Current Rating (Code)	Contacts	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	Female Connector (F) Male Contacts (M)
5A (DD)	18	DD-18AMFM-LL7AXX* DD-18BMFM-LL6AXX*	[A]DD-18AFMM-LL7AXX*	DD-18BFMA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin

▽ Large Size: 2 Points Lock Bayonet > In-Line

• Female Connector (Housing)	Overmolded with Cable	Overmolded with Cable	Field Installable	
• Male Contacts				
• 2 Points Lock Bayonet				
Current Rating (Code)	Contacts	Female Connector (F) Male Contacts (M)	Male Connector (M) Female Contacts (F)	Male Connector (M) Female Contacts (F)
5A (DD)	18	[A]DD-18AFMM-LL7AXX*	DD-18AMFM-LL7AXX* DD-18BMFM-LL6AXX*	DD-18BMFA-LL7001

* XX: Choose the cable length from 01~99m

** [A] Stamp pin

▽ Large Size: 2 Points Lock Bayonet > In-Line

• Male Connector (Housing)	Overmolded with Cable	Overmolded with Cable	Field Installable	
• Female Power+Male Signal				
• 2 Points Lock Bayonet				
Current Rating (Code)	Contacts	Male Connector (M) Female Power+Male Signal (D)	Female Connector (F) Male Power+Female Signal (E)	Female Connector (F) Male Power+Female Signal (E)
20A+2A (DCU)	08 (3+5)	DCU-08AMDM-LL7BXX*	DCU-08AFEM-LL7BXX*	DCU-08BFEA-LL7001
20A+5A (DCD)	12 (3+9)	DCD-12AMDM-LL7AXX*	DCD-12AFEM-LL7AXX* DCD-12AFEM-LR7AXX*	DCD-12BFEA-LL7001

* XX: Choose the cable length from 01~99m

▽ Large Size: 2 Points Lock Bayonet > In-Line

• Male Connector (Housing)	Field Installable	Overmolded with Cable	Field Installable	
• Female Power+Male Signal				
• 2 Points Lock Bayonet				
Current Rating (Code)	Contacts	Male Connector (M) Female Power+Male Signal (D)	Female Connector (F) Male Power+Female Signal (E)	Female Connector (F) Male Power+Female Signal (E)
20A+2A (DCU)	08 (3+5)	DCU-08BMDA-LL7001	DCU-08AFEM-LL7BXX*	DCU-08BFEA-LL7001
20A+5A (DCD)	12	DCD-12BMDA-LL7001	DCD-12AFEM-LL7AXX* DCD-12AFEM-LR7AXX*	DCD-12BFEA-LL7001



【Note】 Design and specification are subject to change without notice.

* XX: Choose the cable length from 01~99m

Large Size: 2 Points Lock Bayonet



In-Line

▽ Large Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Power+Female Signal • 2 Points Lock Bayonet 		 <p>Overmolded with Cable</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>
Current Rating (Code)	Contacts	Male Connector (M) Male Power+Female Signal(E)	Female Connector (F) Female Power+Male Signal(D)	Female Connector (F) Female Power+Male Signal(D)
20A+2A (DCU)	08 (3+5)	DCU-08AMEM-LL7BXX*	DCU-08AFDM-LL7BXX*	DCU-08BFDA-LL7001
20A+5A (DCD)	12 (3+9)	DCD-12AMEM-LL7AXX*	DCD-12AFDM-LL7AXX* DCD-12AFDM-LR7AXX*	DCD-12BFDA-LL7001

* XX: Choose the cable length from 01~99m

▽ Large Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Power+Female Signal • 2 Points Lock Bayonet 		 <p>Field Installable</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>
Current Rating (Code)	Contacts	Male Connector (M) Male Power+Female Signal (E)	Female Connector (F) Female Power+Male Signal (D)	Female Connector (F) Female Power+Male Signal (D)
20A+2A (DCU)	08 (3+5)	DCU-08BMEA-LL7001	DCU-08AFDM-LL7BXX*	DCU-08BFDA-LL7001
20A+5A (DCD)	12 (3+9)	DCD-12BMEA-LL7001	DCD-12AFDM-LL7AXX* DCD-12AFDM-LR7AXX*	DCD-12BFDA-LL7001

* XX: Choose the cable length from 01~99m

▽ Large Size: 1"-20 UNEF > Receptacle and Mating Pair

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • Screw Thread & 2 Points Lock Bayonet • Front Fastened & Rear Fastened 	<p>Receptacle</p> <p>2 Points Lock Bayonet (L)</p> <p>Screw Thread (S)</p>	<p>Overmolded with Cable</p> <p>2 Points Lock Bayonet (L)</p> <p>Screw Thread (S)</p>	<p>Field Installable</p> <p>2 Points Lock Bayonet (L)</p> <p>Screw Thread (S)</p>
		<p>⑥ PCB (P/R) or Solder Type (S)</p> <p>⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)</p>	<p>⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)</p> <p>⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)</p>
Current Rating (Code)	Contacts ②	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)
2A (DU)	20,21,22	DU- ② PMM ⑥ - ⑦ C7001	DU- ② AFFM- ⑦ L7AXX* DU- ② BFFM- ⑦ L6AXX*
5A (DD)	18	DD-18PMMP- ⑦ C7001 [A]DD-18PMMS- ⑦ C7001 [A]DD-18PMMS- ⑦ S7001 [A]DD-18RMMS- ⑦ C7001 DD-18PMMP- ⑦ S7001	[A]DD-18AFFM- ⑦ L7AXX* DD-18AFFM- ⑦ R7AXX*
20A (DC)	02,03,04, 05,06,07	DC- ② PMMP- ⑦ C7001 [A]DC- ② PMMS- ⑦ C7001 [A]DC- ② RMMS- ⑦ C7001 DC- ② PMMP- ⑦ S7001 [A]DC- ② PMMS- ⑦ S7001	[A]DC- ② AFFM- ⑦ L7AXX*
			DC- ② BFFA- ⑦ L7001 DC-02BFFB- ⑦ L7001 DC-03BFFB-LL7001

* XX: Choose the cable length from 01~99m




** [A] Stamp pin

Circular Connector I Find Our Standard Products

Large Size: Screw Thread and 2 Points Lock Bayonet

Receptacle and Mating Pair







▽ Large Size: 1"-20UNEF and 2 Points Lock Bayonet > Receptacle and Mating Pair

• Male Connector (Housing)	Receptacle	Overmolded with Cable	Field Installable	
<ul style="list-style-type: none"> • Female Contacts • Screw Thread & 2 Points Lock Bayonet • Front Fastened 	 <p>2 Points Lock Bayonet (L)</p>  <p>Screw Thread (S)</p>	 <p>2 Points Lock Bayonet (L)</p>  <p>2 Points Lock Bayonet (L)</p>	 <p>2 Points Lock Bayonet (L)</p>  <p>Screw Thread (S)</p>	
<p>⑥ PCB (P/R) or Solder Type (S) ⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)</p> <p>⑥ 2 Points Lock Bayonet (L) or Screw Thread (S) ⑦ 2 Points Lock Bayonet (L) or Screw Thread (S)</p> <p>⑥ 2 Points Lock Bayonet (L) or Screw Thread (S)</p>				
Current Rating (Code)	Contacts ②	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	
5A (DD)	18	DD-18PMFP- ⑦ C7001 [A]DD-18PMFS- ⑦ C7001 DD-18PMFP- ⑦ S7001 [A]DD-18PMFS- ⑦ S7001 [A]DD-18RMFS- ⑦ C7001	[A]DD-18AFMM- ⑦ L7AXX*	DD-18BFMA- ⑦ L7001
5A (DSD) *Metal	18	DSD-18PMF ⑥ -SS8001 DSD-18PMF ⑥ -SS8002	DSD-18BFMM-SL6AXX* DSD-18BFMM-SR6AXX*	-
20A (DC)	02,03	DC- ② PMFP- ⑦ C7001	-	DC- ② BFMB- ⑦ L7001

* XX: Choose the cable length from 01~99m




** [A] Stamp pin

▽ Large Size: 2 Points Lock Bayonet > Receptacle and Mating Pair

• Male Connector (Housing)	Receptacle	Overmolded with Cable	Field Installable	
• Female Power+Male Signal				
• 2 Points Lock Bayonet				
• Front Fastened				
⑥ PCB (P/R) or Solder Type (S)				
Current Rating (Code)	Contacts	Male Connector (M) Female Power+Male Signal (D)	Female Connector (F) Male Power+Female Signal (E)	Female Connector (F) Male Power+Female Signal (E)
20A+2A (DCU)	(3+5)	DCU-08PMDS-LC7001	DCU-08AFEM-LL7BXX*	DCU-08BFEA-LL7001
20A+5A (DCD)	(3+9)	DCD-12PMDS ⑥-LC7001	DCD-12AFEM-LL7AXX* DCD-12AFEM-LR7AXX*	DCD-12BFEA-LL7001




* XX: Choose the cable length from 01~99m

▽ Large Size: 2 Points Lock Bayonet > Receptacle and Mating Pair

• Male Connector (Housing)	Receptacle	Overmolded with Cable	Field Installable	
• Male Power+Female Signal				
• 2 Points Lock Bayonet				
• Front Fastened				
⑥ PCB (P/R) or Solder Type (S)				
Current Rating (Code)	Contacts	Male Connector (M) Male Power+Female Signal (E)	Female Connector (F) Female Power+Male Signal (D)	Female Connector (F) Female Power+Male Signal (D)
20A+2A (DCU)	(3+5)	DCU-08PMES-LC7001	DCU-08AFDM-LL7BXX*	DCU-08BFDA-LL7001
20A+5A (DCD)	(3+9)	DCD-12PMES-LC7001	DCD-12AFDM-LL7AXX* DCD-12AFDM-LR7AXX*	DCD-12BFDA-LL7001



* XX: Choose the cable length from 01~99m

▽ Macro Size: 2 Points Lock Bayonet > Receptacle and Mating pair

• Male Connector (Housing)	Receptacle	Overmolded with Cable	Field Installable	
• Female Contacts				
• 2 Points Lock Bayonet				
• Front Fastened				
⑥ PCB (P) or Solder Type (S)				
Current Rating (Code)	Contacts	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	Female Connector (F) Male Contacts (M)
5A (ED)	31	ED-31PMF ⑥-LS7001	ED-31AFMM-LL7AXX*	-

* XX: Choose the cable length from 01~99m

▽ Other Size: 3 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Male Contacts • 3 Points Lock Bayonet 	 <p>Overmolded with Cable</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>	
Current Rating (Code)	Contacts	Male Connector (M) Male Contacts (M)	Female Connector (F) Female Contacts (F)	Female Connector (F) Female Contacts (F)
10A+5A (GBD)	08	GBD-08AMMM-TL8AXX* GBD-08BMMMM-TL7AXX*	GBD-08AFFM-TL8AXX* GBD-08BFFM-TL7AXX*	-

* XX: Choose the cable length from 01~99m

▽ Other Size: 2 Points Lock Bayonet > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Contacts • 2 Points Lock Bayonet 	 <p>Overmolded with Cable</p>	 <p>Overmolded with Cable</p>	 <p>Field Installable</p>	
Current Rating (Code)	Contacts	Male Connector (M) Female Contacts (F)	Female Connector (F) Male Contacts (M)	Female Connector (F) Male Contacts (M)
10A (MAB)	04	MAB-04AMFM-LL7AXX* MAB-04BMFM-LL6AXX*	MAB-04AFMM-LL7AXX* MAB-04BFMM-LL6AXX*	-

* XX: Choose the cable length from 01~99m

▽ Other Size: Push Lock > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Contacts • Push Lock • Front Fastened 	Receptacle	Field Installable	Field Installable
Current Rating (Code) 5A (PLD)	Contacts 2 02,03,04	Male Connector (M) Female Contacts (F) PLD- 2 PMFS-QC7001	Female Connector (F) Male Contacts (M) PLD- 2 BFMA-QL7001

▽ Other Size: Push Lock > In-Line

<ul style="list-style-type: none"> • Male Connector (Housing) • Female Contacts • Push Lock 	Field Installable	Field Installable	Field Installable
Current Rating (Code) 5A (PLD)	Contacts 2 02,03,04	Male Connector (M) Female Contacts (F) PLD- 2 BMFA-QL7001	Female Connector (F) Male Contacts (M) PLD- 2 BFMA-QL7001


Mini Size

T-Adaptor || I-Adaptor

Accessories

▽ Mini Size: 7/16"-28 UNS and 2 Points Lock Bayonet > T-Adaptor

Customization – Upon Request




⑤ For connector 1
⑥ For connector 2
⑦ For connector 3

Choose Connector / Contacts Gender:
M: Male + Male
F: Female + Female

Current Rating	Contacts ②	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Female Connector / Female Contacts)	More options
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Female Connector / Female Contacts)	
			Connector 3 (Male Connector / Male Contacts)	Connector 3 (Female Connector / Female Contacts)	
5A	02,03	Screw Thread	AA- ② ② ② -MMM-TS001	AA- ② ② ② -FFF-TS001	AA- ② ② ② - ⑤ ⑥ ⑦ -TS001
		2 Points Lock Bayonet	AA- ② ② ② -MMM-TL001	AA- ② ② ② -FFF-TL001	AA- ② ② ② - ⑤ ⑥ ⑦ -TL001
2A	04,05,06	Screw Thread	AA- ② ② ② -MMM-TS001	AA- ② ② ② -FFF-TS001	AA- ② ② ② - ⑤ ⑥ ⑦ -TS001
		2 Points Lock Bayonet	AA- ② ② ② -MMM-TL001	AA- ② ② ② -FFF-TL001	AA- ② ② ② - ⑤ ⑥ ⑦ -TL001

▽ Mini Size: 7/16"-28 UNS and 2 Points Lock Bayonet > I-Adaptor

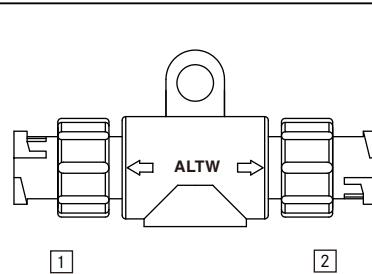Customization – Upon Request




⑥ For connector 1
⑦ For connector 2

Choose Connector / Contacts Gender:
(M): Male + Male
(F): Female + Female

Current Rating	Contacts ③	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Female Connector / Female Contacts)	More options
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Female Connector / Female Contacts)	
			Connector 3 (Male Connector / Male Contacts)	Connector 3 (Female Connector / Female Contacts)	
5A	02,03	Screw Thread	AA-00 ③ ③ -0MM-IS001	AA-00 ③ ③ -OFF-IS001	AA-00 ③ ③ -0 ⑥ ⑦ -IS001
		2 Points Lock Bayonet	AA-00 ③ ③ -0MM-IL001	AA-00 ③ ③ -OFF-IL001	AA-00 ③ ③ -0 ⑥ ⑦ -IL001
2A	04,05,06	Screw Thread	AA-00 ③ ③ -0MM-IS001	AA-00 ③ ③ -OFF-IS001	AA-00 ③ ③ -0 ⑥ ⑦ -IS001
		2 Points Lock Bayonet	AA-00 ③ ③ -0MM-IL001	AA-00 ③ ③ -OFF-IL001	AA-00 ③ ③ -0 ⑥ ⑦ -IL001

△ Mini Size > Dust Cap

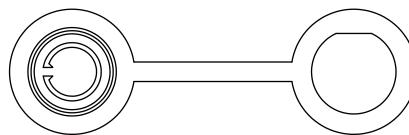Customization – Upon Request



* With Rubber Lead


Size	Mating Pair	Mating Pair (Gender)	P/N
Mini Size 7/16"-28 UNS	Receptacle	Male	CAP-DAAMDPC1

△ Mini Size: 7/16"-28 UNS and 2 Points Lock Bayonet > Waterproof Cap


Customization – Upon Request

Screw Thread


2 Points Lock Bayonet




Without Attaching Leader



Without Attaching Leader



With Fish Line / Rubber Lead



With Chain

Product Details:

⑥ More to choose: None(A) / With Chain(B) / With Rubber Lead(C) / With Fish Line(D)

⑦ Choose 2 contacts(1) / 3 contacts(3) / 4~6 contacts(2) for male mating pair

Size	Mating Pair	Mating Style	Mating Pair (Gender)	P/N
Mini Size 7/16"-28 UNS	Receptacle	Screw Thread	Male	CAP-WAAMSP⑥①
		2 Points Lock Bayonet	Male	CAP-WAAMLP⑥⑦
			Female	CAP-WAAFLP⑥⑦
	Overmolded with Cable	Screw Thread	Male	CAP-WAAMSMA1
		2 Points Lock Bayonet	Male	CAP-WAAMLMA⑦
			Female	CAP-WAAFLMA⑦
		Screw Thread	Male	CAP-WAAMSMA1
	Receptacle and Overmolded with Cable	2 Points Lock Bayonet	Male	CAP-WAAMLMA⑦
			Female	CAP-WAAFLMA⑦

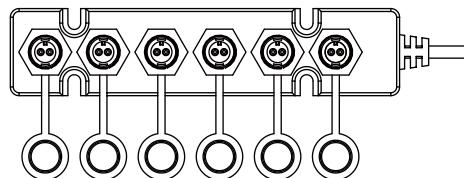
【Note】 Design and specification are subject to change without notice.

Mini Size

Multi-Port

▽ Mini Size: 7/16"-28 UNS and 2 Points Lock Bayonet >
Multi-Port with / without Cap

Customization – Upon Request



⑧ For connector 1

⑨ For connector 2

⑩ For connector 3

⑪ For connector 4

⑫ For connector 5

⑬ For connector 6

Choose Connector / Contacts Gender:

(M): Male + Male

(H): Male + Female

(F): Female + Female

(B): Female + Male


* XX: Choose the cable length:01-99 m /

Cable 22+24+B PVC

Current Rating	Contacts ②	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Male Connector / Female Contacts)	More options
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Male Connector / Female Contacts)	
			Connector 3 (Male Connector / Male Contacts)	Connector 3 (Male Connector / Female Contacts)	
			Connector 4 (Male Connector / Male Contacts)	Connector 4 (Male Connector / Female Contacts)	
			Connector 5 (Male Connector / Male Contacts)	Connector 5 (Male Connector / Female Contacts)	
			Connector 6 (Male Connector / Male Contacts)	Connector 6 (Male Connector / Female Contacts)	
5A	02,03	Screw Thread	A-②②②②②②-MMMMM-SAXX*	A-②②②②②②-HHHHHH-SAXX*	A-②②②②②②-⑦⑧⑨⑩⑪⑫⑬-SAXX*
		2 Points Lock Bayonet	A-②②②②②②-MMMMM-LAXX* A-222222-MMMMM-LA01	A-②②②②②②-HHHHHH-LAXX*	A-②②②②②②-⑦⑧⑨⑩⑪⑫⑬-LAXX*
2A	04,05,06	Screw Thread	A-②②②②②②-MMMMM-SAXX*	A-②②②②②②-HHHHHH-SAXX*	A-②②②②②②-⑦⑧⑨⑩⑪⑫⑬-SAXX*
		2 Points Lock Bayonet	A-②②②②②②-MMMMM-LAXX*	A-②②②②②②-HHHHHH-LAXX*	A-②②②②②②-⑦⑧⑨⑩⑪⑫⑬-LAXX*

▽ Standard Size: 5/8" - 27 UNS and 2 Points Lock Bayonet > T-Cable

Customization – Upon Request



5 For connector 1
6 For connector 2

Choose Connector / Contacts Gender:
(M): Male + Male
(F): Female + Female
(H): Male + Female
(B): Female + Male

* XX: Choose the cable length:01-99 m /
PVC UL2464 Cable

Current Rating	Contacts ②	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Female Connector / Female Contacts)	More options
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Female Connector / Female Contacts)	
10A	02.03,04	Screw Thread	BA- ②② 00-MMO-TSAXX*	BA- ②② 00-FF0-TSAXX*	BA- ②② 00- ⑤⑥ 0-TSAXX*
		2 Points Lock Bayonet	BA- ②② 00-MMO-TLAXX*	BA- ②② 00-FF0-TLAXX*	BA- ②② 00- ⑤⑥ 0-TLAXX*
5A	02,03,04, 05,06,07, 08	Screw Thread	BA- ②② 00-MMO-TSAXX*	BA- ②② 00-FF0-TSAXX*	BA- ②② 00- ⑤⑥ 0-TSAXX*
		2 Points Lock Bayonet	BA- ②② 00-MMO-TLAXX*	BA- ②② 00-FF0-TLAXX*	BA- ②② 00- ⑤⑥ 0-TLAXX*
2A	10,12	Screw Thread	BA- ②② 00-MMO-TSAXX*	BA- ②② 00-FF0-TSAXX*	BA- ②② 00- ⑤⑥ 0-TSAXX*
		2 Points Lock Bayonet	BA- ②② 00-MMO-TLAXX*	BA- ②② 00-FF0-TLAXX*	BA- ②② 00- ⑤⑥ 0-TLAXX*

Circular Connector I Accessories

Standard Size

T-Adaptor || I-Adaptor

▽ Standard Size: 5/8" - 27 UNS and 2 Points Lock Bayonet > T-Adaptor

Customization – Upon Request

5 For connector 1
6 For connector 2
7 For connector 3
Choose Connector / Contacts Gender:
(M): Male + Male
(F): Female + Female
(H): Male + Female
(B): Female + Male

Current Rating	Contacts 2	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Female Connector / Female Contacts)	More options
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Female Connector / Female Contacts)	
			Connector 3 (Male Connector / Male Contacts)	Connector 3 (Female Connector / Female Contacts)	
5A	02,03,04, 05,06,07, 08	Screw Thread	BA- 2 2 2 -MMM-TS001	BA- 2 2 2 -FFF-TS001	BA- 2 2 2 - 5 6 7 -TS001
		2 Points Lock Bayonet	BA- 2 2 2 -MMM-TL001	BA- 2 2 2 -FFF-TL001	BA- 2 2 2 - 5 6 7 -TL001
2A	10,12	Screw Thread	BA- 2 2 2 -MMM-TS001	BA- 2 2 2 -FFF-TS001	BA- 2 2 2 - 5 6 7 -TS001
		2 Points Lock Bayonet	BA- 2 2 2 -MMM-TL001	BA- 2 2 2 -FFF-TL001	BA- 2 2 2 - 5 6 7 -TL001

▽ Standard Size: 5/8" - 27 UNS and 2 Points Lock Bayonet > I-Adaptor


Customization – Upon Request

6 For connector 1
7 For connector 2
Choose Connector / Contacts Gender:
(M): Male + Male
(F): Female + Female
(H): Male + Female
(B): Female + Male

Current Rating	Contacts 3	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Female Connector / Female Contacts)	More options
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Female Connector / Female Contacts)	
5A	02,03,04, 05,06,07, 08	Screw Thread	BA-00 3 3 -0MM-IS001	BA-00 3 3 -OFF-IS001	BA-00 3 3 - 0 6 7 -IS001
		2 Points Lock Bayonet	BA-00 3 3 -0MM-IL001	BA-00 3 3 -OFF-IL001	BA-00 3 3 - 0 6 7 -IL001
2A	10,12	Screw Thread	BA-00 3 3 -0MM-IS001	BA-00 3 3 -OFF-IS001	BA-00 3 3 - 0 6 7 -IS001
		2 Points Lock Bayonet	BA-00 3 3 -0MM-IL001	BA-00 3 3 -OFF-IL001	BA-00 3 3 - 0 6 7 -IL001

▽ Standard Size > Dust Cap

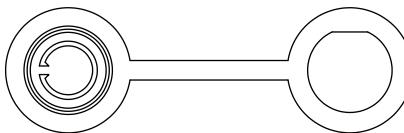Customization – Upon Request



* With Rubber Lead

Size	Mating Pair	Mating Pair (Gender)	P/N
Standard Size	Receptacle	Male	CAP-DABMDPC1 CAP-DABMDPC2 CAP-DABMDPC3
		Female	-
	Overmolded with Cable	Male	CAP-DABMDCC1 CAP-DABMDCC2
		Female	CAP-DABFDCC1

▽ Standard Size: 5/8" - 27 UNS and 2 Points Lock Bayonet > Waterproof Cap

Customization – Upon Request

Screw Thread




With Fish Line / Rubber Lead




With Chain


2 Points Lock Bayonet



Without Attaching Leader



With Fish Line / Rubber Lead



With Chain

Product Details:

⑥ More to choose: None(A) / With Chain(B) / With Rubber Lead(C) / With Fish Line(D)

Size	Mating Pair	Mating Style	Mating Pair (Gender)	P/N
Standard Size 5/8"-27 UNS	Receptacle	Screw Thread	Male	CAP-WABMSP ⑥ 1
			Female	CAP-WABFSP ⑥ 1
		2 Points Lock Bayonet	Male	CAP-WABMLP ⑥ ⑦ 1
			Female	CAP-WABFLP ⑥ ⑦ 1
	Overmolded with Cable	Screw Thread	Male	CAP-WABMSMA1
		2 Points Lock Bayonet	Male	CAP-WABMLMA1
			Female	CAP-WABFLMA1
	Receptacle and Overmolded with Cable	Screw Thread	Male	CAP-WABMSMA1
		2 Points Lock Bayonet	Male	CAP-WABMLMA1
			Female	CAP-WABMLMA1

【Note】 Design and specification are subject to change without notice.

Circular Connector I Accessories


Standard Size

Multi-Port I Wrench

↳ Standard Size: 5/8" - 27 UNS and 2 Points Lock Bayonet > Multi-Port

Customization – Upon Request

⑥ For connector 1
⑦ For connector 2
⑧ For connector 3
⑨ For connector 4




Choose Connector / Contacts Gender:
(M): Male + Male
(F): Female + Female

* XX: Choose the cable length:01-99 m /
Cable 22+24+B PVC

More options


Current Rating	Contacts ②	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Male Connector / Female Contacts)	More options
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Male Connector / Female Contacts)	
			Connector 3 (Male Connector / Male Contacts)	Connector 3 (Male Connector / Female Contacts)	
			Connector 4 (Male Connector / Male Contacts)	Connector 4 (Male Connector / Female Contacts)	
10A	02.03.04	Screw Thread	B-②②②②-MMMM-SAXX*	B-②②②②-HHHH-SAXX*	B-②②②②-⑥⑦⑧⑨-SAXX*
		2 Points Lock Bayonet	B-②②②②-MMMM-LAXX*	B-②②②②-HHHH-LAXX* B-04040404-HHHH-SAXX*	B-②②②②-⑥⑦⑧⑨-LAXX*
5A	02.03.04, 05.06.07, 08	Screw Thread	B-②②②②-MMMM-SAXX*	B-②②②②-HHHH-SAXX*	B-②②②②-⑥⑦⑧⑨-SAXX*
		2 Points Lock Bayonet	B-②②②②-MMMM-LAXX*	B-②②②②-HHHHHH-LA* B-04040404-HHHH-SAXX*	B-②②②②-⑥⑦⑧⑨-LAXX*
2A	10,12	Screw Thread	B-②②②②-MMMM-SAXX*	B-②②②②-HHHH-SAXX*	B-②②②②-⑥⑦⑧⑨-SAXX*
		2 Points Lock Bayonet	B-②②②②-MMMM-LAXX*	B-②②②②-HHHH-LAXX*	B-②②②②-⑥⑦⑧⑨-LAXX*

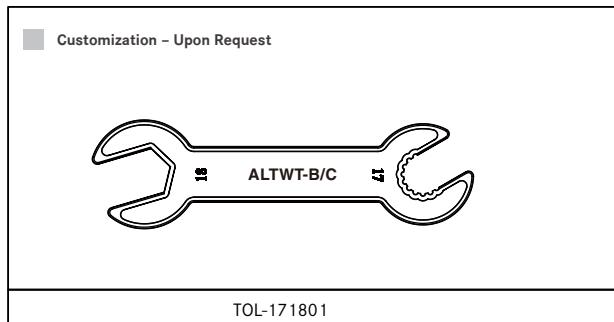↳ Standard Size > Wrench



△ Middle Size > Dust Cap

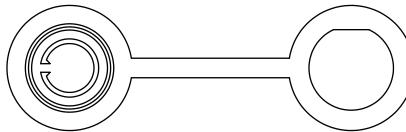Customization – Upon Request




* With Rubber Lead

Size	Mating Pair	Mating Pair (Gender)	P/N
Middle Size	Receptacle	Male	CAP-DACMDPC1 CAP-DACMDPC2
	Overmolded with Cable	Female	CAP-DACFDCC1


△ Middle Size: 13/16"-28 UNS and 2 Points Lock Bayonet > Waterproof Cap

Customization – Upon Request

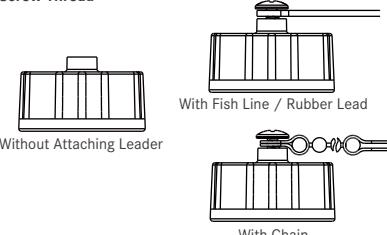Screw Thread



2 Points Lock Bayonet

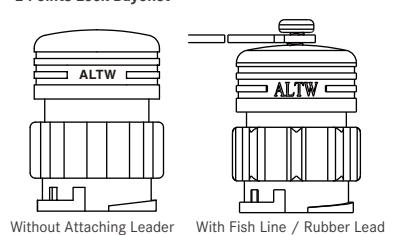

With Fish Line / Rubber Lead

Without Attaching Leader

With Chain

With Fish Line / Rubber Lead

With Chain

Product Details:

⑥ More to choose: None(A) / With Chain(B) / With Rubber Lead(C) / With Fish Line(D)

⑦ Choose plastic(1) or metal(2) items

Size	Mating Pair	Mating Style	Mating Pair (Gender)	P/N
Middle Size 13/16"-28 UNS	Receptacle	Screw Thread	Male	CAP-WACMSP ⑥ ⑦
		2 Points Lock Bayonet	Male	CAP-WACMLP ⑥ ①
	Overmolded with Cable		Female	CAP-WACFLP ⑥ ①
	Screw Thread	Male	CAP-WACMSMA ⑦	
		Male	CAP-WACMLMA1	
	Receptacle and Overmolded with Cable	2 Points Lock Bayonet	Female	CAP-WACFLMA1
			Male	CAP-WACMSMA ⑦
		2 Points Lock Bayonet	Male	CAP-WACMLMA1
			Female	CAP-WACFLMA1


Circular Connector I Accessories

Middle Size

Dummy I Wrench

▽ Middle Size: 13/16"-28 UNS > Dummy


Customization – Upon Request



Size	Mating Pair	Mating Style	P/N
13/16"-28 UNS	Receptacle (Female)	Screw Thread	CAP-CACFSBA1

▽ Middle Size > Wrench


Customization – Upon Request



TOL-152501
TOL-152502

▽ Large Size > Dust Cap

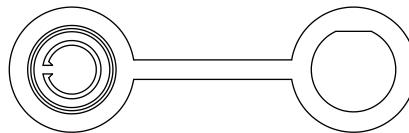Customization – Upon Request




* With Rubber Lead

Size	Mating Pair	Mating Pair (Gender)	P/N
Large Size	Receptacle	Male	CAP-DADMDPC1



▽ Large Size: 1"-20 UNEF and 2 Points Lock Bayonet > Waterproof Cap

Customization – Upon Request

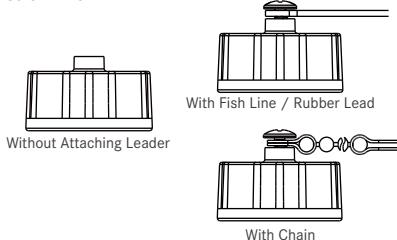Screw Thread



2 Points Lock Bayonet

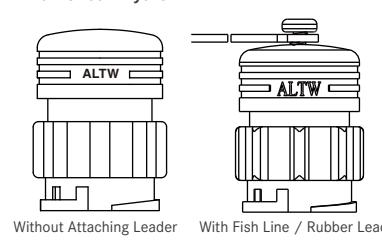

Product Details:

⑥ More to choose: None (A) / With Chain (B) /

With Rubber Lead (C) / With Fish Line (D)


⑦ Choose 2~31 Contacts(W/O18) (1) /

18 Contacts (2) for female mating pair

Size	Mating Pair	Mating Style	Mating Pair (Gender)	P/N
Large Size 1"-20 UNEF	Receptacle	Screw Thread	Male	CAP-WADMSP ⑥ 1
		2 Points Lock Bayonet	Male	CAP-WADMLP ⑥ 1
	Receptacle and Overmolded with Cable	2 Points Lock Bayonet	Female	CAP-WADFLP ⑥ ⑦
		Screw Thread	Male	CAP-WADMSMA1
		2 Points Lock Bayonet	Male	CAP-WADMLMA1
			Female	CAP-WADFLMA ⑦

▽ Large Size > Wrench

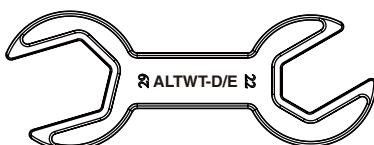Customization – Upon Request



TOL-222901

【Note】 Design and specification are subject to change without notice.


Circular Connector I Accessories

Other Size

T-Cable I I-Adaptor

▽ Other Size: 3 Points Lock Bayonet > T-Cable (10A+5A)

Customization – Upon Request




* XX: Choose the cable length:01-99 m /
PVC UL2464 Cable

Current Rating	Contacts	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Female Connector / Female Contacts)	Connector 1 (Male Connector / Male Contacts)
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Female Connector / Female Contacts)	Connector 2 (Female Connector / Female Contacts)
5A	08	3 Points Lock Bayonet	GA-080800-MMO-TTAXX*	GA-080800-FF0-TTAXX*	GA-080800-MF0-TTAXX*

▽ Other Size: 3 Points Lock Bayonet > I-Adaptor (10A+5A)

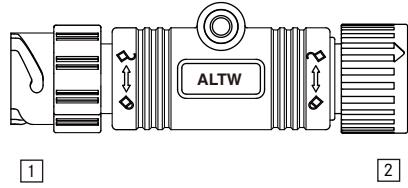Customization – Upon Request



Current Rating	Contacts	Mating Style	Connector 1 (Male Connector / Male Contacts)	Connector 1 (Female Connector / Female Contacts)	Connector 1 (Female Connector / Female Contacts)
			Connector 2 (Male Connector / Male Contacts)	Connector 2 (Female Connector / Female Contacts)	Connector 1 (Male Connector / Male Contacts)
5A	08	3 Points Lock Bayonet	GA-000808-0MM-IT001	GA-000808-0FF-IT001	GA-000808-0FM-IT001

↳ Other Size > Dust Cap

Customization – Upon Request




* Mix Size
* With Rubber Lead


Size	Mating Pair	Mating Pair (Gender)	P/N
Mix Size 12-5A	Receptacle	Male	CAP-DPLMDPC1

↳ Other Size: 3 Points Lock Bayonet > Waterproof Cap

Customization – Upon Request



* Mix Size



With Chain

Product Details:

⑥ Choose the lead: None (A) / With Chain (B) /
With Rubber Lead (C) / With Fish Line (D)

Size	Mating Pair	Mating Style	Mating Pair (Gender)	P/N
Mix Size (Between Standard & Middle Size)	Receptacle	3 Points Lock Bayonet	Male	CAP-WEBMTP ⑥ 1
			Female	CAP-WEBFTP ⑥ 1
	Receptacle and Overmolded with Cable	3 Points Lock Bayonet	Male	CAP-WEBMTMA1
			Female	CAP-WEBFTMA1

Amphenol LTW Technology Co., Ltd.

5F-3, No.51, Sec.4, Zhongyang Rd., Tucheng Dist., New
Taipei City 236, Taiwan
Telephone: +886-2-77416888 Fax: +886-2-77416999
www.amphenolltw.com

Kunshan Factory

No. 62, DaTong Road, Development Zone, Kunshan City,
JiangSu Province, 215333 China
Telephone: +86-512-5761-0501
Fax: +86-512-5761-0515

For further information, please contact :

Sales & Marketing Department | Email : sales@ltw-tech.com