

## DATA SHEET

# SKYA21050: 750 to 770 MHz Linear Power Amplifier

### Automotive Applications

- Japan Intelligent Transport Systems 700 MHz power amplifier: ARIB STD-T109
- LTE Cellular Band 13 power amplifier
- Active distributed antenna system
- Cellular repeaters
- Driver amplifier

### Features

- AEC-Q100 grade 3 (-40 °C to +85 °C) qualification in process
- High gain: 35 dB (unconditionally stable)
- High linearity:  
Adjacent channel power (ACP)  $\leq$  -39 dBm/100 kHz  
with  $P_{OUT} = +23.5$  dBm  
(10 MHz signal bandwidth LTE modulated signal)
- RF input and output internally matched to 50  $\Omega$
- Integrated active bias: performance compensated over temp
- Integrated coupler for output power monitoring
- PA on/off function: 4.0  $\mu$ s switching time
- Single supply voltage: 3.3 V
- Minimal external components
- Level 3 PPAP available at release to production
- Small 5 x 5 mm, 28-pin package  
(MSL3, 260 °C per JEDEC J-STD-020)



Skyworks Green™ products are compliant with all applicable legislation and are halogen-free. For additional information, refer to *Skyworks Definition of Green™*, document number SQ04-0074.

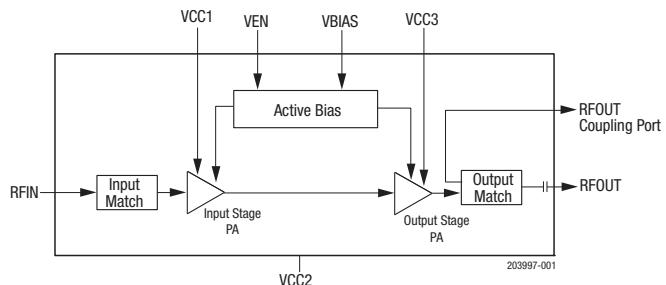



Figure 1. SKYA21050 Linear PA Block Diagram

### Description

The SKYA21050 is a high-linearity power amplifier (PA) with fully matched input/output and high gain. The compact 5 x 5 mm PA is designed for the Japan market 760 MHz vehicle-to-vehicle and infrastructure communication based on the ARIB STD-T109.

The active biasing circuitry is integrated to compensate PA performance over temperature, voltage, and process variation as well as an internal coupler for power monitoring.

A block diagram of the SKYA21050 is shown in Figure 1. The device package and pinout are shown in Figure 2.

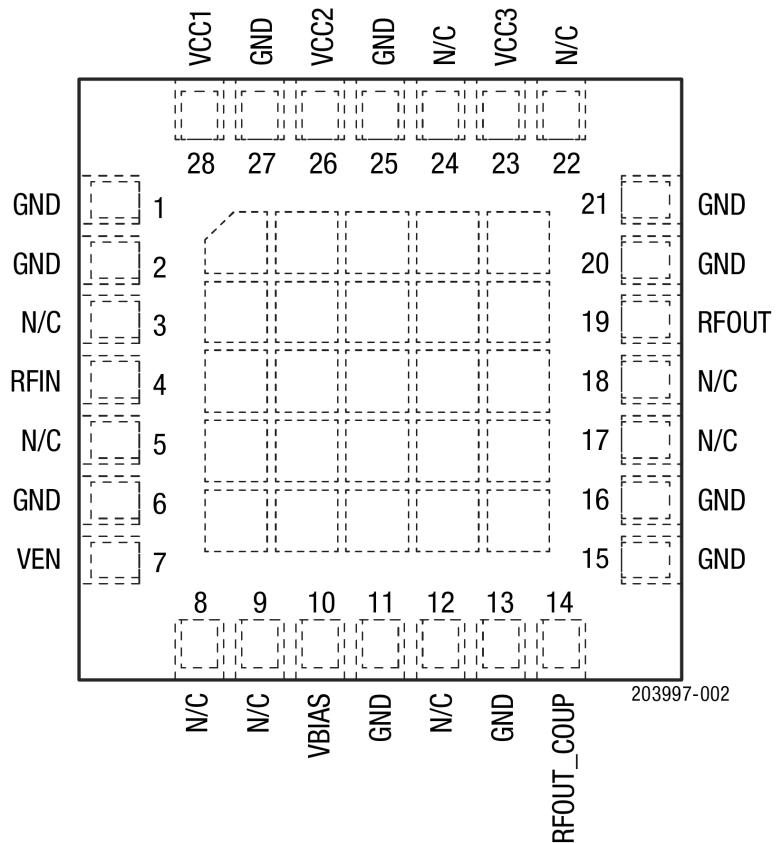

**Figure 2. SKYA21050 Pinout  
(Top View)**

**Table 2. SKYA21050 Signal Descriptions**

Pin	Name	Description	Pin	Name	Description
1	GND	Ground	15	GND	Ground
2	GND	Ground	16	GND	Ground
3	N/C	No internal connection	17	N/C	No internal connection
4	RFIN	RF input	18	N/C	No internal connection
5	N/C	No internal connection	19	RFOUT	RF output
6	GND	Ground	20	GND	Ground
7	VEN	Enable (active low)	21	GND	Ground
8	N/C	No internal connection	22	N/C	No internal connection
9	N/C	No internal connection	23	VCC3	Output stage supply voltage
10	VBIAS	Bias voltage	24	N/C	No internal connection
11	GND	Ground	25	GND	Ground
12	N/C	No internal connection	26	VCC2	No internal connection
13	GND	Ground	27	GND	Ground
14	RFOUT_COUP	RF output coupling port	28	VCC1	Input stage supply voltage

## Technical Description

The SKYA21050 PA contains all of the needed RF matching and DC biasing circuits. This two-stage device is optimized for high linearity and power efficiency. These features make the device suitable for wideband applications where PA linearity and power consumption are of critical importance.

The device is designed for standard ARIB STD-T109 modulated signals. Under these stringent test conditions, the device exhibits excellent spectral purity and power efficiency.

## Electrical and Mechanical Specifications

The absolute maximum ratings of the SKYA21050 are provided in Table 3. The recommended operating conditions are specified in Table 4, and electrical specifications are provided in Table 5.

Typical performance characteristics are shown in Figures 3 through 12.

**Table 3. SKYA21050 Absolute Maximum Ratings<sup>1</sup>**

Parameter	Symbol	Minimum	Maximum	Units
Supply voltage (VCC)	VCC	0	+4.0	V
Total supply current	I <sub>CC</sub>		700	mA
Logic control input voltage (VEN)	VEN	-0.5	3.6	V
Case operating temperature <sup>2</sup>	T <sub>C</sub>	-40	+100	°C
Storage temperature	T <sub>STG</sub>	-55	+150	°C
Junction temperature	T <sub>J</sub>		+150	°C
Thermal resistance	θ <sub>JC</sub>		21	°C/W
Power dissipation	P <sub>DISS</sub>		2.3	W
Electrostatic discharge:	ESD			
Charged Device Model (CDM)			500	V
Human Body Model (HBM)			150	V

<sup>1</sup> Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

<sup>2</sup> Case operating temperature (T<sub>C</sub>) refers to the temperature of the bottom ground pad.

**ESD HANDLING:** Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device.

This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.

**Table 4. SKYA21050 Recommended Operating Conditions**







Parameter	Symbol	Min	Typ	Max	Units
Frequency range	f	750		770	MHz
Supply voltage (VCC1, VCC2, VCC3) <sup>1</sup>	VCC	3.1	3.3	3.6	V
PA enable control voltage (active low):					
Disable	V <sub>ENH</sub>	1.5		3.6	V
Enable	V <sub>ENL</sub>	0		0.6	V
PA enable current (@ PAEN = 3.6 V)	I <sub>EN</sub>			<1	mA
Case operating temperature	T <sub>C</sub>	-40		+85	°C

<sup>1</sup> Voltage levels measured at the pads of the package. The Evaluation Board supply voltage levels may be different.

**Table 5. SKYA21050 Electrical Specifications<sup>1</sup>****(V<sub>CC</sub> = +3.3 V, T<sub>C</sub> = +25 °C, f = 760 MHz, Characteristic Impedance [Z<sub>0</sub>] = 50 Ω, V<sub>EN</sub> = 0 V, Unless Otherwise Noted)**

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Gain	G@+23.5dBm	CW, P <sub>OUT</sub> = +23.5 dBm	35	37		dB
Input return loss	IS11I	CW, P <sub>IN</sub> = -30 dBm	7.5	9		dB
Output return loss	IS22I	CW, P <sub>IN</sub> = -30 dBm, 750 to 770 MHz	10	15		dB
Quiescent current	I <sub>CQ</sub>	No RF		155	185	mA
Operating current	I <sub>CC</sub>	CW, P <sub>OUT</sub> = +23.5 dBm		510	600	mA
Power-down current	I <sub>PD</sub>	V <sub>EN</sub> = 2.5 V		0.1	0.5	mA
Adjacent channel power: ACP/100 kHz @ 750 MHz ACP/100 kHz @ 770 MHz	ACP <sub>LO</sub> ACP <sub>HI</sub>	Measured with 10 MHz BW, LTE waveform P <sub>OUT</sub> = +23.5 dBm, V <sub>CC</sub> = 3.1 V and 3.6 V		-38 -41	-35 -38	dBm/100 kHz dBm/100 kHz
Output P1dB <sup>2</sup>	OP1dB	CW, Referenced to Gain, P <sub>OUT</sub> = +23.5 dBm		+31		dBm
Power-added efficiency	PAE	CW, P <sub>OUT</sub> = +23.5 dBm	11	13		%
Output coupling factor	CPL <sub>OUT</sub>	CW, P <sub>OUT</sub> = +23.5 dBm	16.5	18.5	20.5	dB
Turn-on time <sup>2</sup>	t <sub>ON</sub>	Time from V <sub>EN</sub> = 50% to RF = 90%		4.5	6.5	μs
Turn-off time <sup>2</sup>	t <sub>OFF</sub>	Time from V <sub>EN</sub> = 50% to RF = 10%		1.0	2.0	μs

<sup>1</sup> Performance is guaranteed only under the conditions listed in this table.<sup>2</sup> Not tested in production. Verified by characterization.

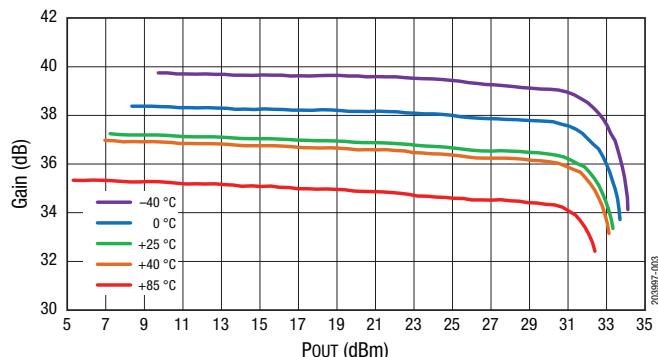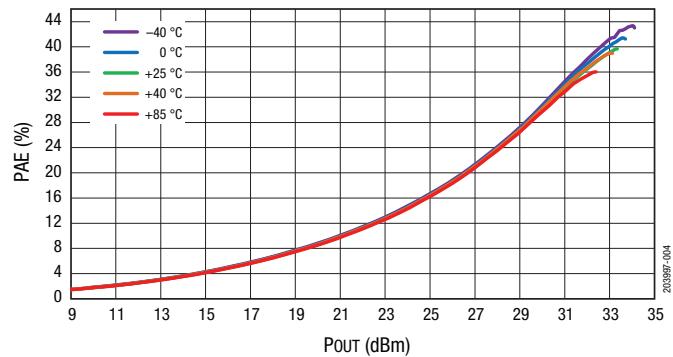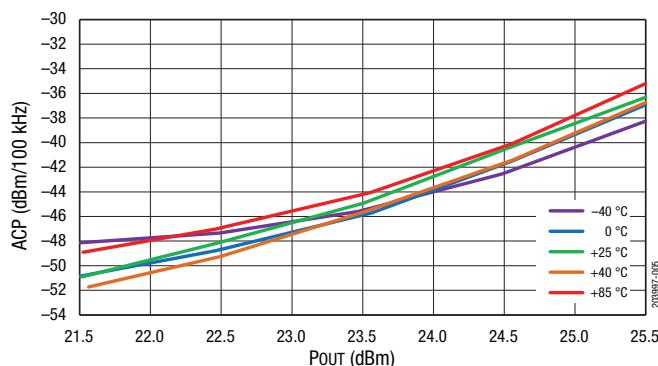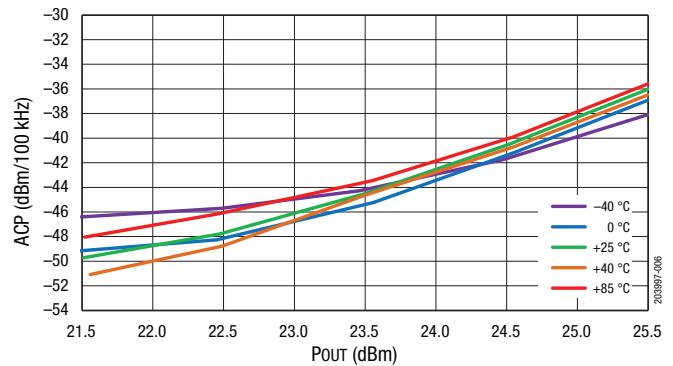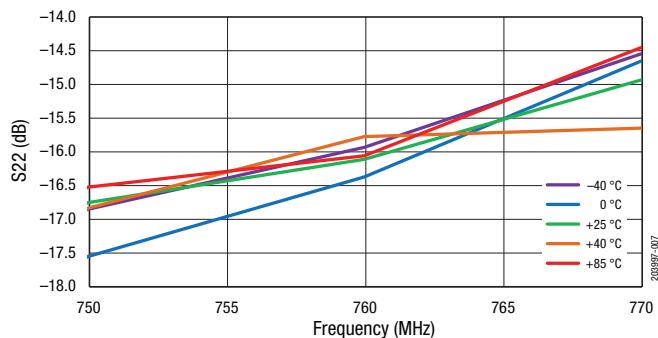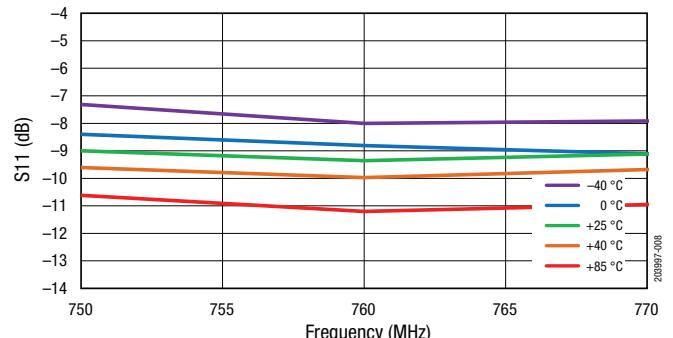**Typical Performance Characteristics**(V<sub>CC</sub> = +3.3 V, T<sub>C</sub> = +25 °C, f = 760 MHz, Characteristic Impedance [Z<sub>0</sub>] = 50 Ω, V<sub>EN</sub> = 0 V, Unless Otherwise Noted)**Figure 3. Gain vs POUT Across Temperature****Figure 4. PAE vs POUT Across Temperature****Figure 5. ACP\_High (10 MHz) vs POUT Across Temperature (@ 760 MHz, 3.3 V)****Figure 6. ACP\_Low (10 MHz) vs POUT Across Temperature (@ 760 MHz, 3.3 V)****Figure 7. S22 vs Frequency Across Temperature****Figure 8. S11 vs Frequency Across Temperature**

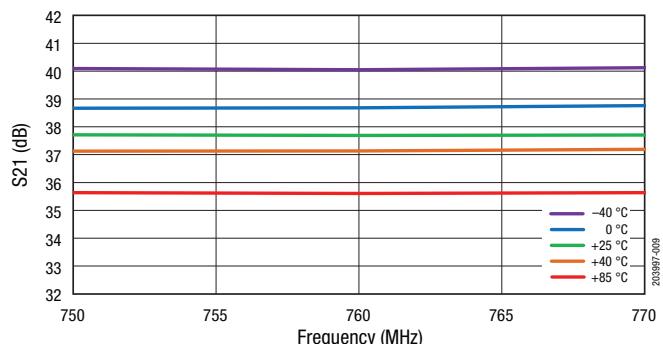


Figure 9. S21 vs Frequency Across Temperature

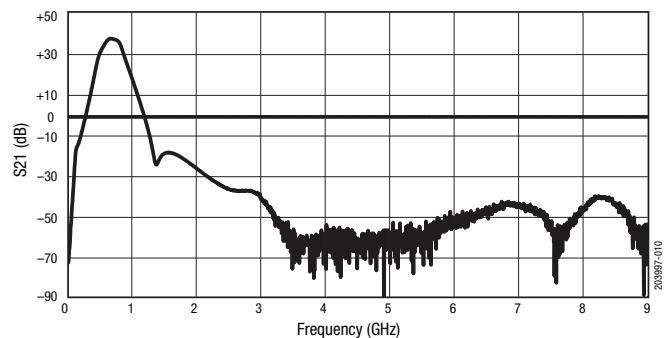


Figure 10. S21 vs Frequency

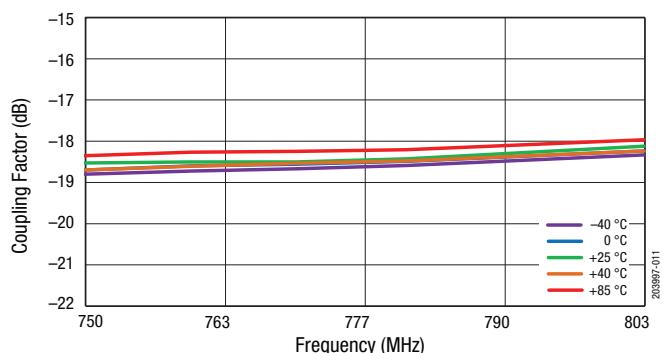


Figure 11. Coupling Factor vs Frequency Across Temperature

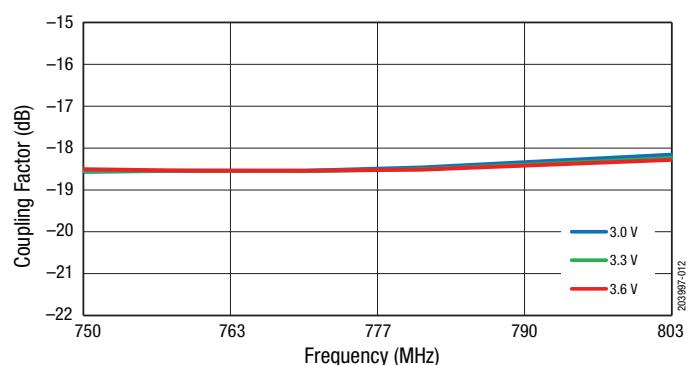


Figure 12. Coupling Factor vs Frequency Across Power Supply

## Evaluation Board Description

The SKYA21050 Evaluation Board is used to test the performance of the SKYA21050 PA. A typical application schematic diagram is shown in Figure 13. A Bill of Materials for the SKYA21050 Evaluation Board is listed in Table 6. An assembly drawing for the Evaluation Board is shown in Figure 14. The board layer detail is shown in Figure 15. The layer detail physical characteristics are shown in Figure 16.

## Application Circuit Notes

**Center Ground.** It is extremely important to sufficiently ground the bottom ground pad of the device for both thermal and stability reasons. Multiple small vias are acceptable and work well under the device if solder migration is an issue.


**GND (pins 1, 2, 6, 11, 13, 15, 16, 20, 21, 25, and 27).** Attach all ground pins to the RF ground plane with the largest diameter and lowest inductance via that the layout allows. Multiple small vias are acceptable and work well under the device if solder migration is an issue.

**VBIAS (pin 10).** The bias supply voltage for each stage, nominally set to +3.3 V.

**RFOUT (pin 19).** Amplifier RF output pin ( $Z_0 = 50 \Omega$ ). The module includes an onboard internal DC blocking capacitor. All impedance matching is provided internal to the module.

**VCC1 and VCC3 (pins 28 and 23, respectively).** Supply voltage for each stage collector bias is nominally set to 3.3 V. Bypass and decoupling capacitors C1, C2, C5, and C6 should be placed in the approximate location shown on the evaluation board assembly drawing, although exact placement is not critical.

**RFIN (pin 4).** Amplifier RF input pin ( $Z_0 = 50 \Omega$ ). The module includes an onboard internal DC blocking capacitor. All impedance matching is provided internal to the module.

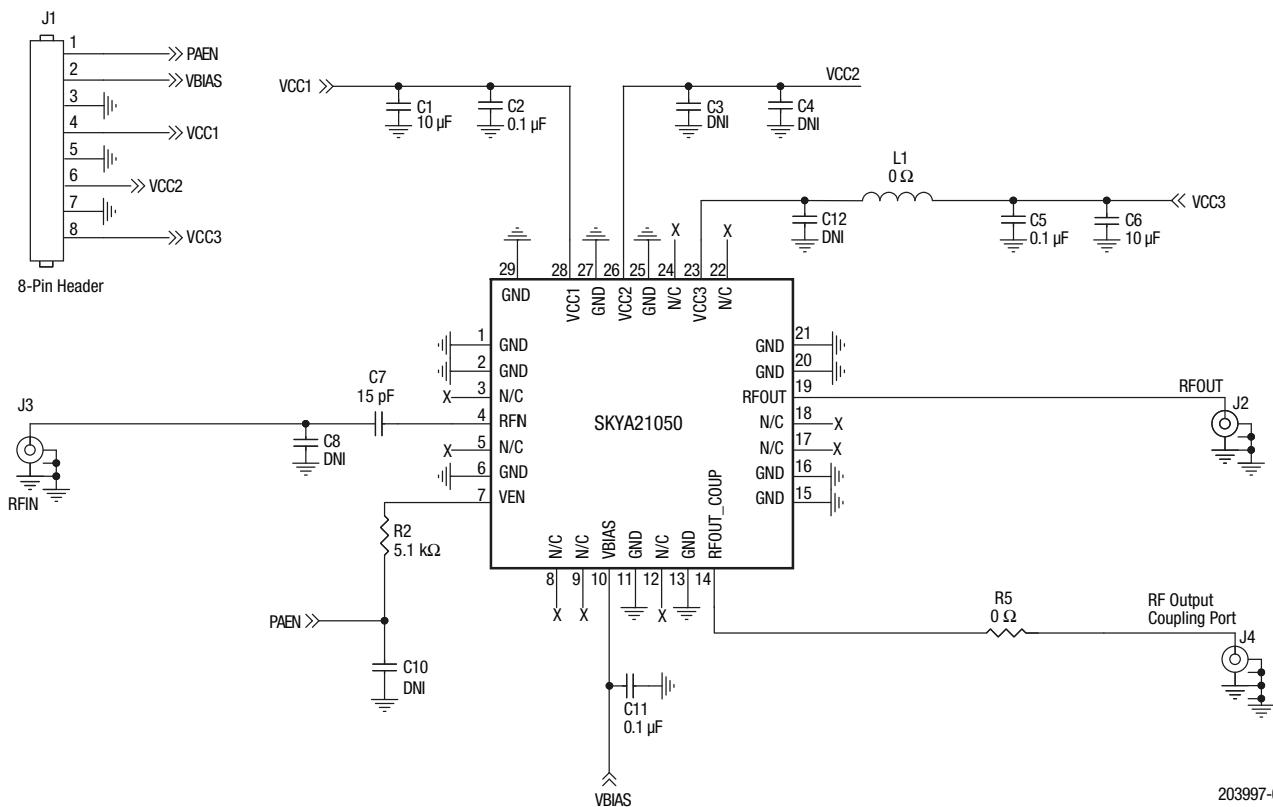


203997-013

Figure 13. SKYA21050 Application Schematic

Table 6. SKYA21050 Evaluation Board Bill of Materials (BOM)

Quantity	Component	Size	Part Number	Description
2	C1, C6	1206	C1206X7R160-106KNE	Capacitor, 10 μF, 16 V, ±10%, X7R
3	C2, C5, C11	0402	GRM155R71C104KA88	Ceramic capacitor, 0.1 μF, 10%, X7R, 16 V
5	C3, C4, C8, C10, C12		DNI	DNI
1	C7	0402	GRM1555C1H150JZ01J	Capacitor, 15 pF, 5%, 0.063 W
1	L1	0603	RM73ZIJ000	Resistor, 0 Ω, 5%
1	R2	0402	ERJ2GEJ512	Resistor, 5100 Ω, 5%, 0.063 W
1	R5	0402	ERJ2GE0R00	Resistor, 0 Ω, jumper, 0.063 W
1		PCB	TW22-D115-002	SKYA21050 Evaluation Board

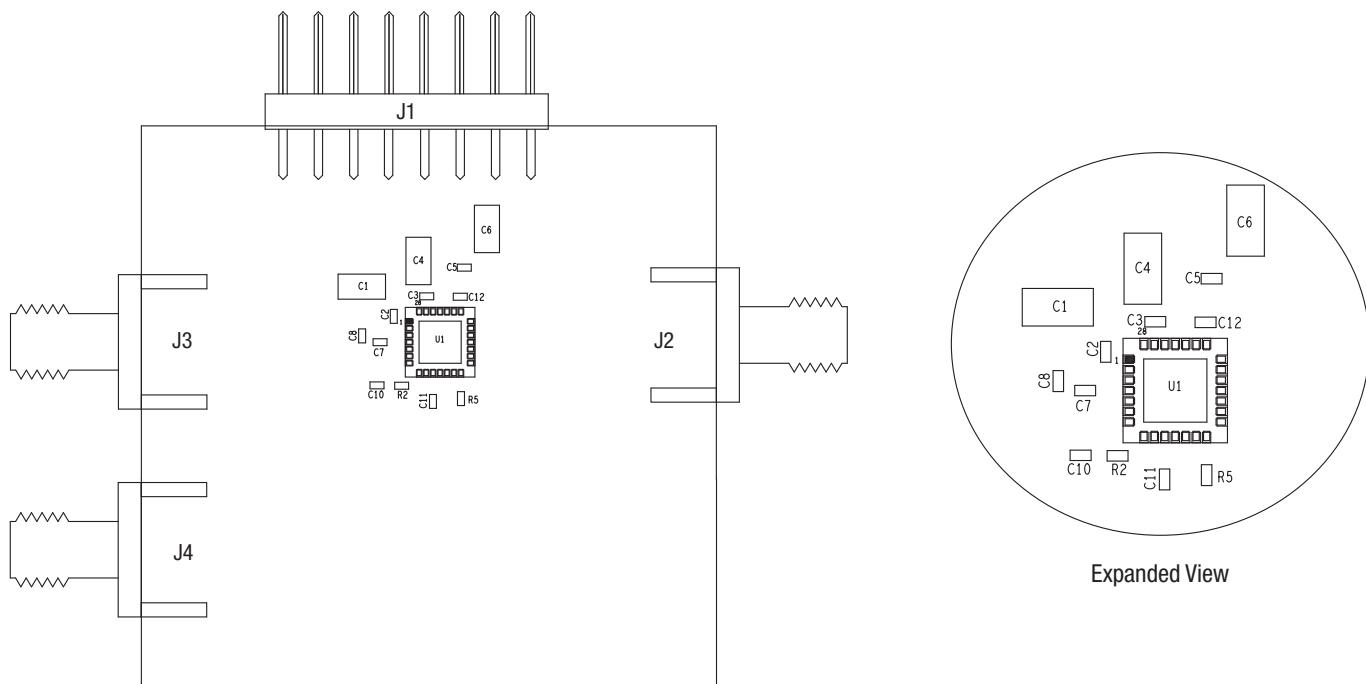


*Notes:*

The C3 and C4 components are not required.

Some of the other components shown are optional.

203997-014

**Figure 14. SKYA21050 Evaluation Board Assembly Diagram**

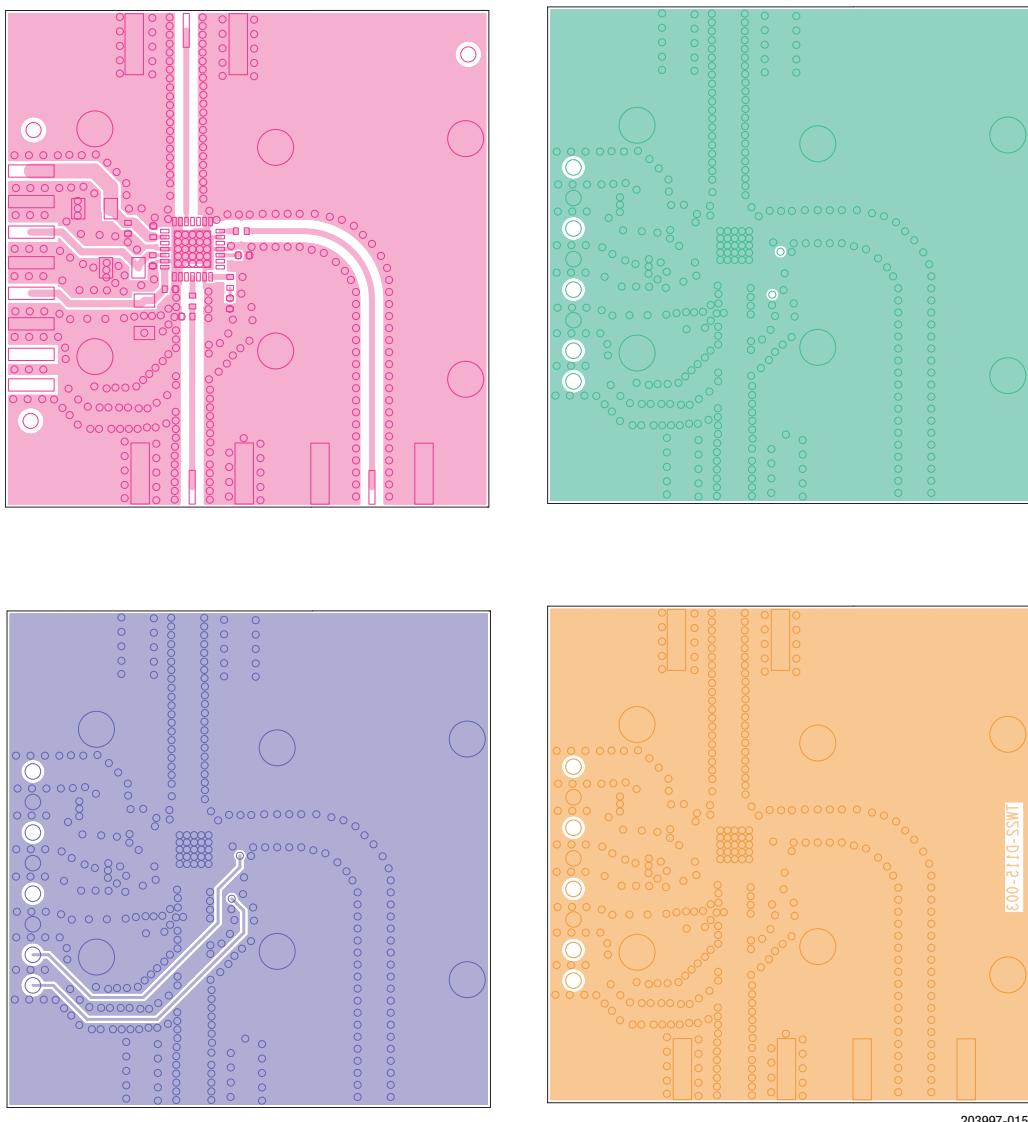

**Figure 15. SKYA21050 Board Layer Detail**

Cross Section	Name	Thickness (mm)	Material
Top Solder Mask	Top Solder Mask	0.010	Solder Resist
L1	L1	0.035	Cu – 1 oz
Dielectric	Dielectric	0.250	Rogers R04350B
L2	L2	0.035	Cu – 1 oz
Dielectric	Dielectric	0.500	FR4
L3	L3	0.035	Cu – 1 oz
Dielectric	Dielectric	0.250	FR4
L4	L4	0.035	Cu – 1 oz
Bottom Solder Mask	Bottom Solder Mask	0.010	Solder Resist

203997-016

**Figure 16. SKYA21050 Layer Detail Physical Characteristics**

## Package Dimensions

Figure 17 shows the typical part marking for the SKYA21050. The PCB layout footprint is shown in Figure 18. Figure 19 shows the package dimensions, and Figure 20 provides the tape and reel dimensions.

## Package and Handling Information

Since the device package is sensitive to moisture absorption, it is baked and vacuum packed before shipping. Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SKYA21050 is rated to Moisture Sensitivity Level 3 (MSL3) at 260 °C. It can be used for lead or lead-free soldering. For additional information, refer to the Skyworks Application Note, *PCB Design and SMT Assembly/Rework Guidelines for MCM-L Packages*, document number 101752.

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format.


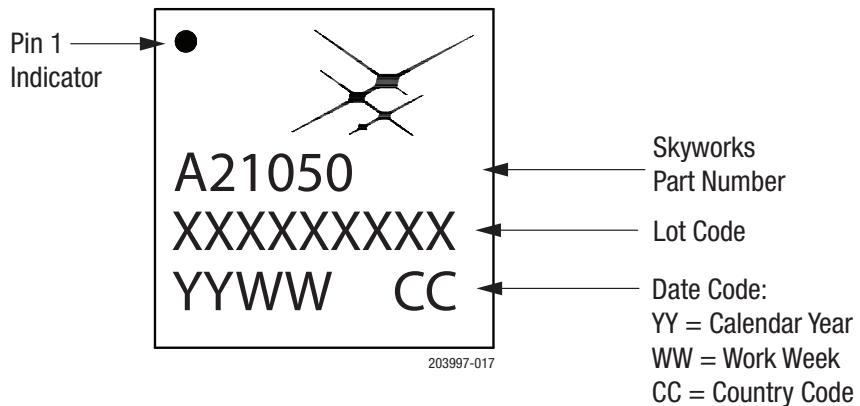


Figure 17. SKYA21050 Typical Part Marking

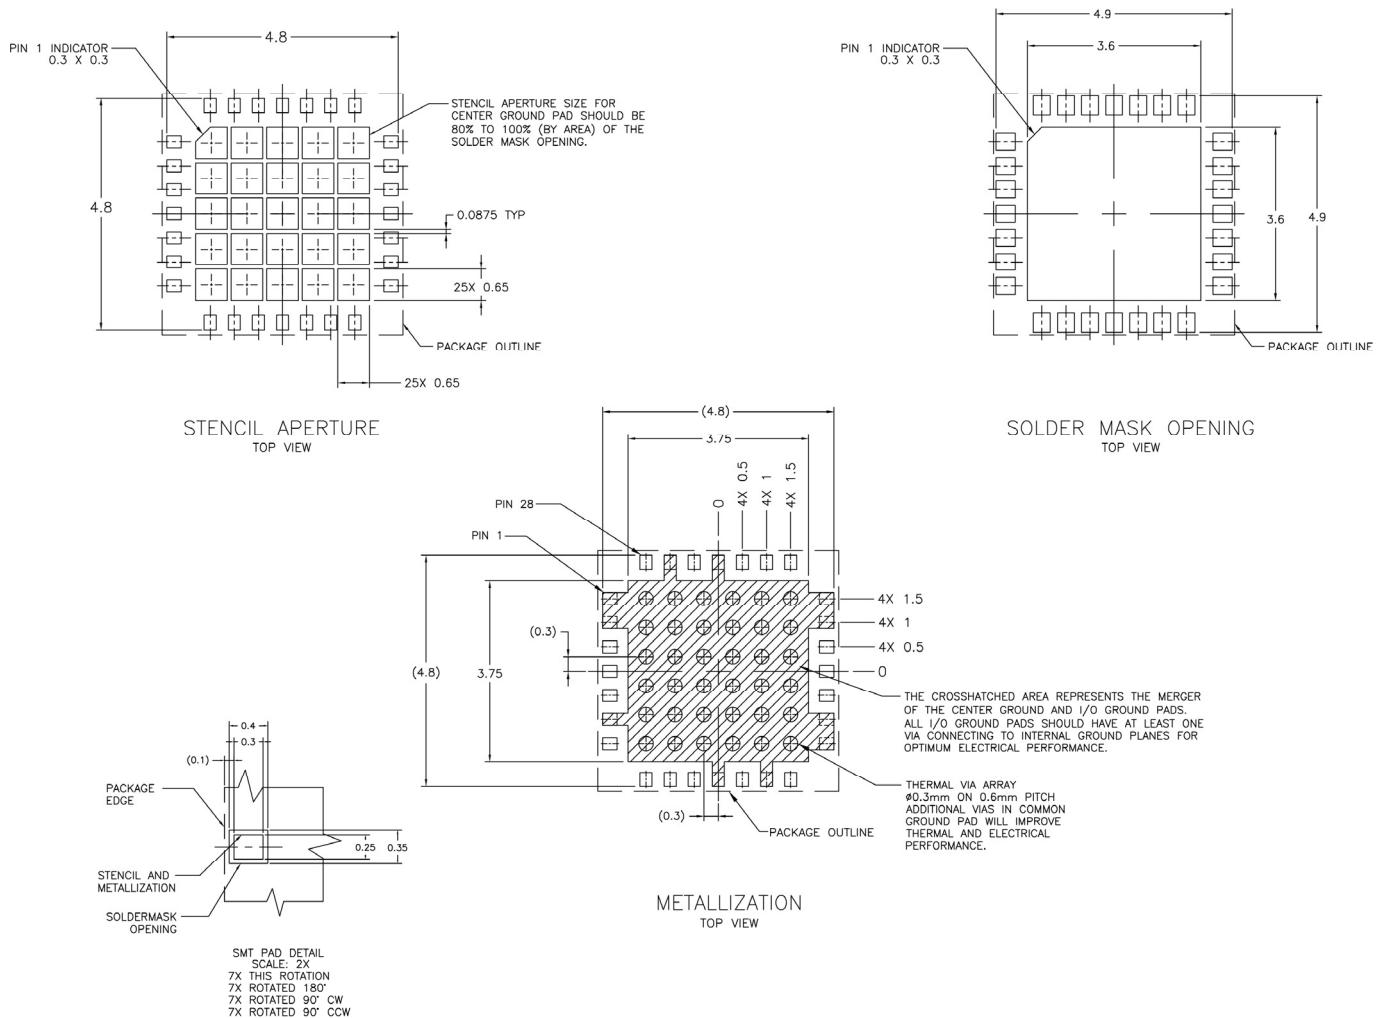

## NOTES:

1. DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE SPECIFIED.
2. THERMAL VIAS SHOULD BE RESIN FILLED AND CAPPED IN ACCORDANCE WITH IPC-4761 TYPE VII VIAS. 30-35UM Cu THICKNESS IS RECOMMENDED.

203997-018

Figure 18. SKYA21050 PCB Layout Footprint


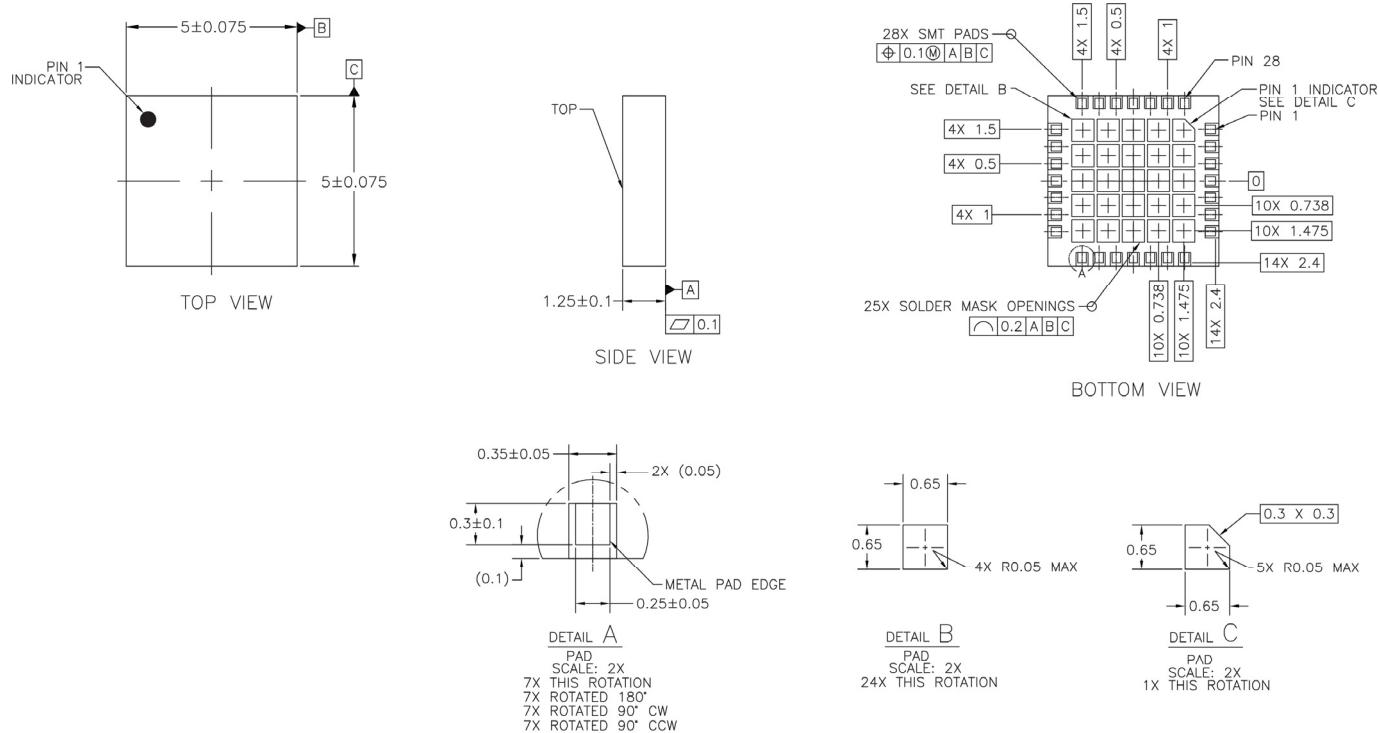


Figure 19. SKYA21050 Package Dimensions

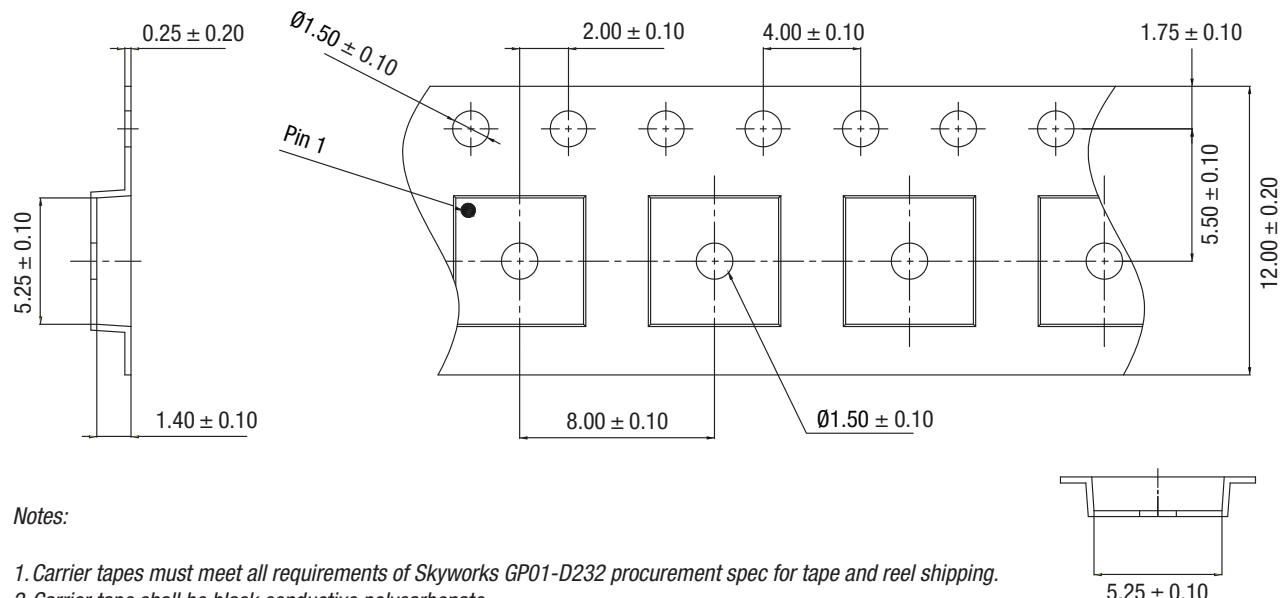

**Figure 20. SKYA21050 Tape and Reel Dimensions**

## Ordering Information

Part Number	Product Description	Evaluation Board Part Number
SKYA21050	750 to 770 MHz Linear Power Amplifier	SKYA21050-EK1

Copyright © 2016-2017, 2019 Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc. or its subsidiaries in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.