

BSS84DW-7-F(ES)

Rev-1.2

SuperMOS - SOT-363 -60V BV_{DSS} , 3.5Ω $R_{DS(on)}$, P-channel MOSFET

1. Description

The BSS84DW-7-F(ES) is P-Channel enhancement MOS Field Effect Transistor. Uses advanced technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. Device is suitable for use in DC-DC conversion, power switch and charging circuit. Standard Product BSS84DW-7-F(ES) is Pb-free.

2. Features

- -60V, $R_{DS(ON)}=3.5\Omega$ (Typ.) @ $V_{GS}=-10V$
 $R_{DS(ON)}=4.5\Omega$ (Typ.) @ $V_{GS}=-4.5V$
- Fast Switching
- High density cell design for low $R_{DS(on)}$
- Material: Halogen free
- Reliable and rugged
- Avalanche Rated
- Low leakage current



3. Applications

- PWM applications
- Load switch
- Power management in portable/desktop PCs
- DC/DC conversion

4. Ordering Information

Part Number	Package	Marking	Material	Packing	Quantity per reel	Flammability Rating	Reel size
BSS84DW-7-F(ES)	SOT-363	.84KZ	Halogen free	Tape & Reel	3,000 PCS	UL 94V-0	7 inches

5. Pin Configuration and Functions

Pin	Function	Outline	Circuit Diagram
2/5	Gate		
1/4	Source		
6/3	Drain		

6. Specification

BSS84DW-7-F(ES)

Rev-1.2

Absolute Maximum Rating & Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		BV_{DSS}	-60	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_A = 25^\circ\text{C}$	I_D	-0.16	A
	$T_A = 100^\circ\text{C}$		-0.10	
Maximum Power Dissipation		P_D	0.23	W
Pulsed Drain Current		I_{DM}	-0.65	A
Operating Junction Temperature		T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55 to +150	$^\circ\text{C}$

Thermal resistance ratings

Single Operation			
Parameter	Symbol	Max	Unit
Junction-to-Ambient Thermal Resistance	$R_{\theta JA}$	543	$^\circ\text{C/W}$

BSS84DW-7-F(ES)


Rev-1.2

Electrical Characteristics

At TA = 25°C unless otherwise specified

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =-250uA	-60			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} =0V, V _{DS} =-60V			-100	nA
Gate-to-source Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V			±10	uA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} =V _{DS} , I _D =-250uA	-1.1	-1.6	-2.2	V
Drain-to-source On-resistance	R _{DS(on)}	V _{GS} =-10V, I _D =-0.15A		3.5	5.2	Ω
		V _{GS} =-4.5V, I _D =-0.1A		4.5	6.3	
CHARGES AND CAPACITANCES						
Input Capacitance	C _{ISS}	V _{GS} =0V, V _{DS} =-25V f=1MHz		17		pF
Output Capacitance	C _{OSS}			4		
Reverse Transfer Capacitance	C _{RSS}			1.6		
Total Gate Charge	Q _{G(TOT)}	V _{GS} =-10V, V _{DS} =-25V I _D =-0.15A		1.1		nC
Gate-to-Source Charge	Q _{GS}			0.3		
Gate-to-Drain Charge	Q _{GD}			0.2		
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{d(ON)}	V _{GS} =-10V, V _{DS} =-25V I _D =-0.15A, R _G =6Ω		4.8		ns
Rise Time	t _r			19		
Turn-Off Delay Time	t _{d(OFF)}			52		
Fall Time	t _f			32		
BODY DIODE CHARACTERISTICS						
Forward Voltage	V _{SD}	V _{GS} =0V, I _{SD} =-0.15A	-0.45	-0.88	-1.5	V


7. Typical Characteristics

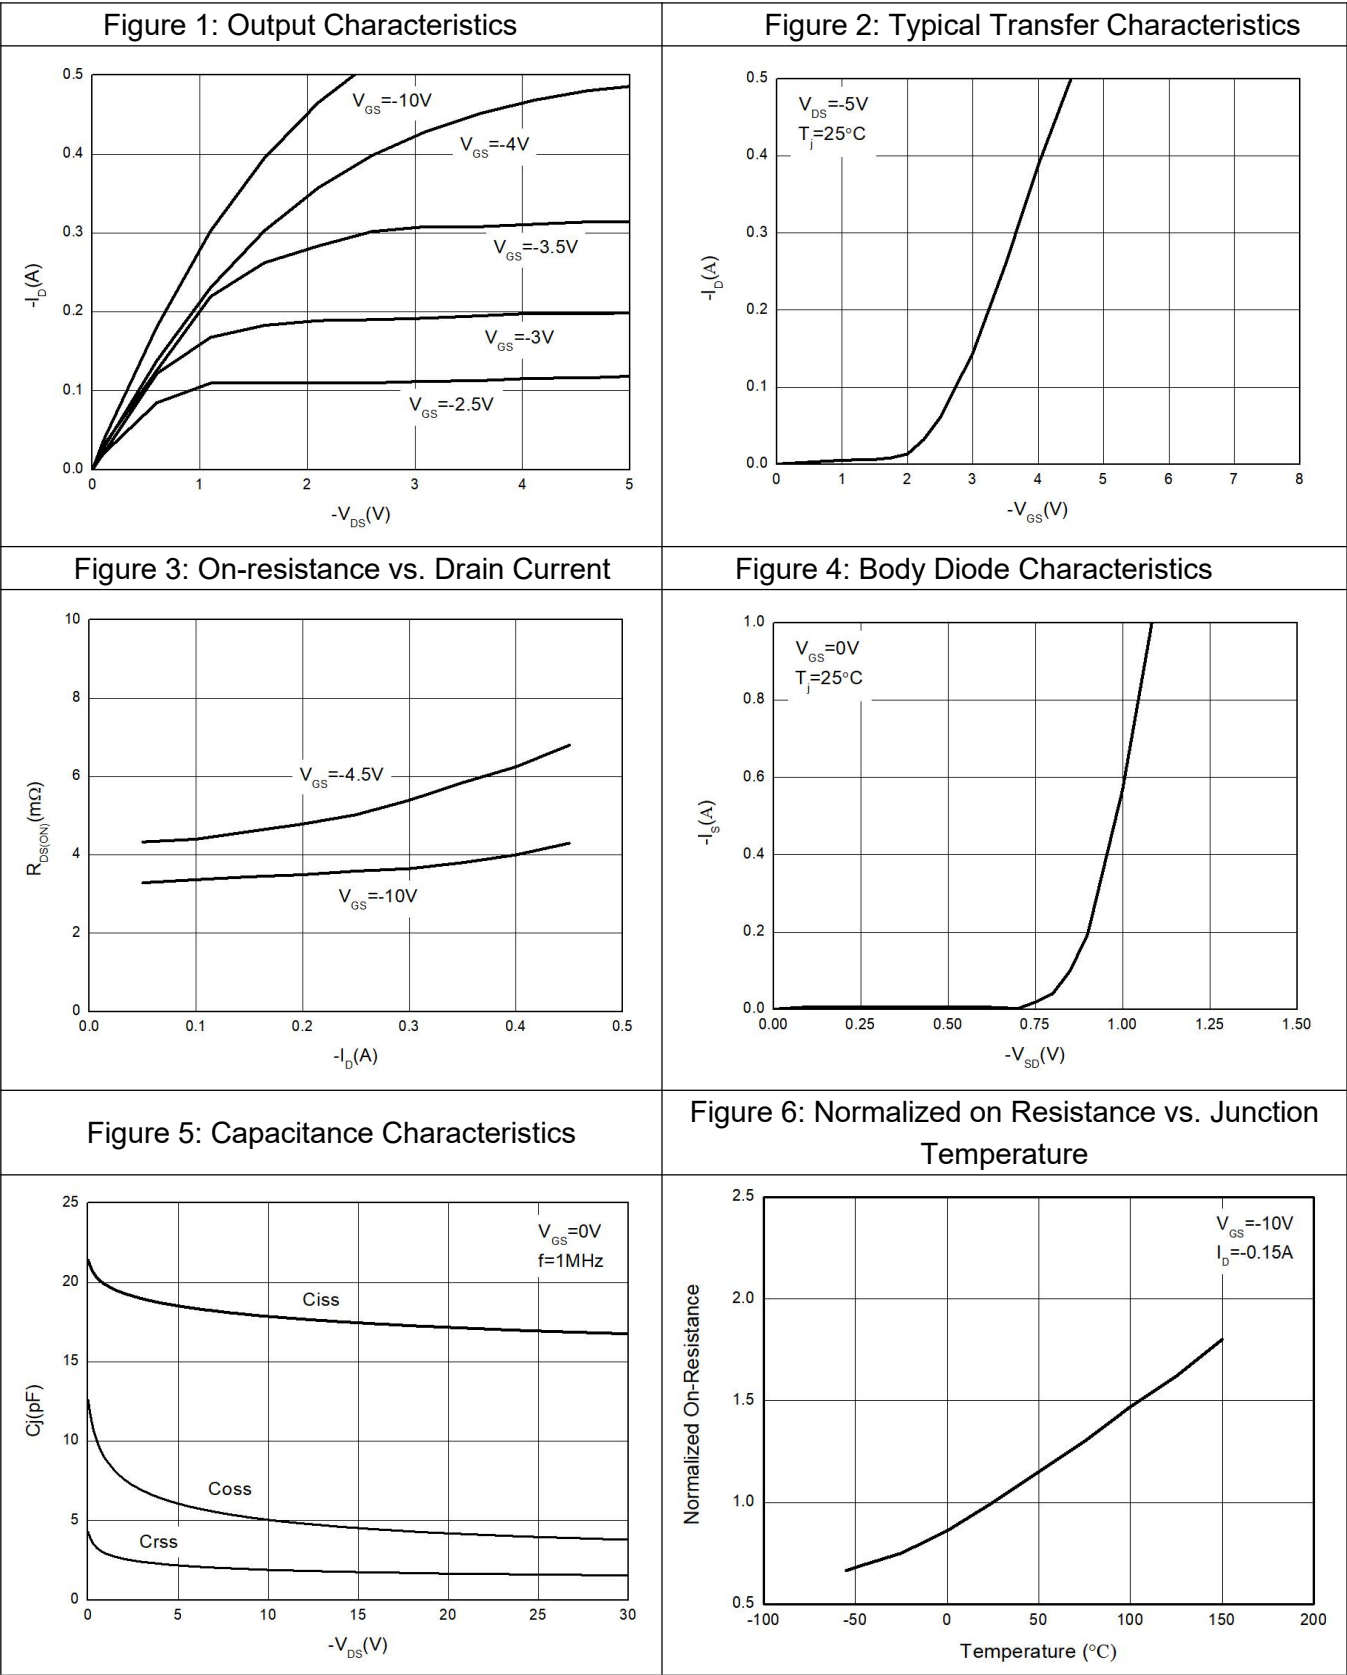

BSS84DW-7-F(ES)

Rev-1.2


Figure7: on-Resistance vs. Gate to Source

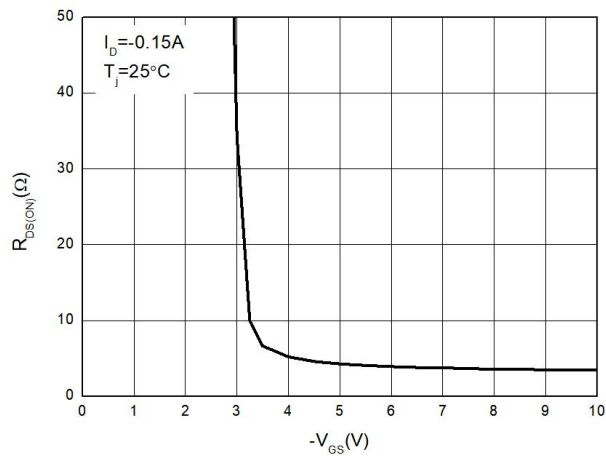

BSS84DW-7-F(ES)

Rev-1.2

8. Dimension (SOT-363)

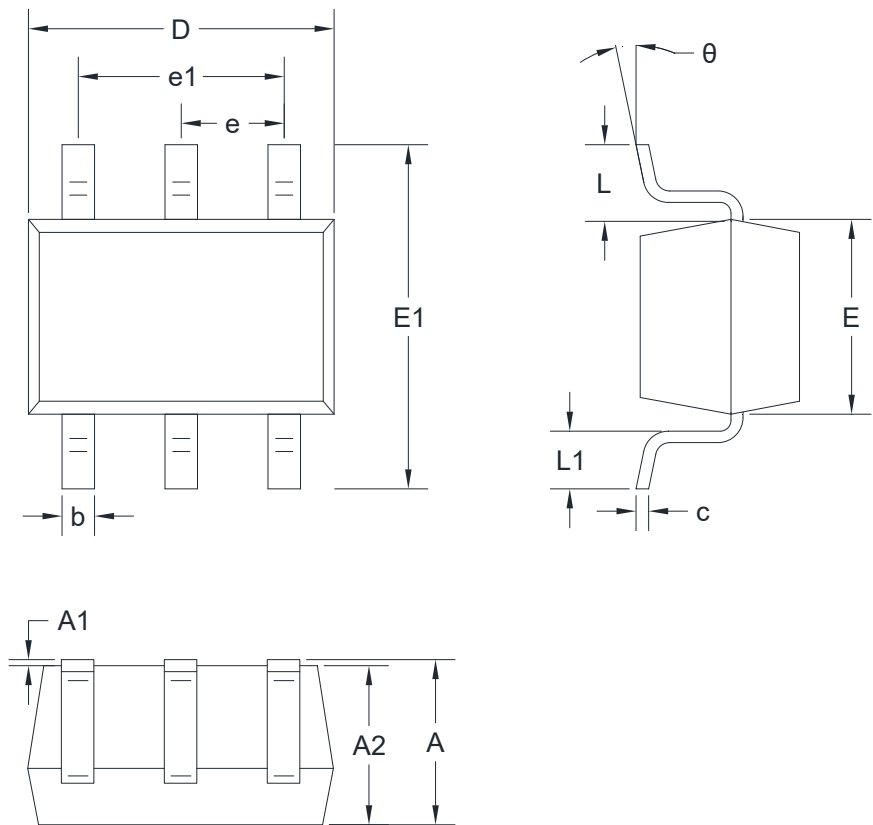

Dimensions in Millimeter					
SYMBOL	MIN	MAX	SYMBOL	MIN	MAX
A	0.85	1.10	E1	2.10	2.45
A1	0.00	0.10	e	0.65TYP	
A2	0.85	1.00	e1	1.20	1.40
b	0.15	0.35	L	0.525TYP	
c	0.08	0.15	L1	0.26	0.46
D	2.00	2.20	θ	0°	8°
E	1.15	1.35			

DISCLAIMER

ELECSUPER PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ElecSuper products. You are solely responsible for

(1) selecting the appropriate ElecSuper products for your application;

(2) designing, validating and testing your application;

(3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. ElecSuper grants you permission to use these resources only for development of an application that uses the ElecSuper products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ElecSuper intellectual property right or to any third party intellectual property right. ElecSuper disclaims responsibility for, and you will fully indemnify ElecSuper and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ElecSuper's products are provided subject to ElecSuper's Terms of Sale or other applicable terms available either on www.elecsuper.com or provided in conjunction with such ElecSuper products. ElecSuper's provision of these resources does not expand or otherwise alter ElecSuper's applicable warranties or warranty disclaimers for ElecSuper products.