

MHC2500L03

3dB 90° Directional Coupler



MECSINE 兆讯

Applications

- 1, Low Insertion Loss For Power Combining
- 2, Doherty Power Amplifier
- 3, Small Cell & Pico
- 4, GNSS Antenna



Features

- 1, Low Insertion Loss
- 2, High Isolation, 20 dB typ.
- 3, Excellent high-power capacity up to 100W
- 4, RoHS compliance (Pb-Free)

Description

The MHC2500L03 is a low cost, high performance 3 dB hybrid coupler in an easy used surface mount package. The MHC2500L03 is ideal for doherty power amplifier, circular polarized antenna and other applications where low insertion loss and tight amplitude and phase balance are required. MHC2500L03 is constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All components are 100% RF tested.

Characteristics


Table 1. MHC2500L03 Characteristics

Item	Min.	Type	Max.	Unit
Frequency Range	2300		2700	MHz
Isolation	20	22		dB
Insertion Loss		0.3	0.4	dB
Phase Unbalance	-4		+4	degrees
Amplitude	-0.5		+0.5	dB
Return Loss	20	22		dB
Operating Temp.	-40		+85	°C
Power			100	W

All the above data are based on specified demo board and tested in 25° environment.

Port Configuration

Figure 1. MHC2500L03 (Bottom View)

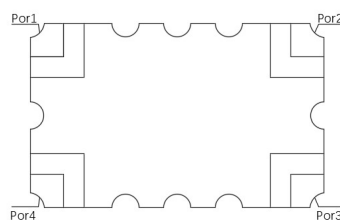

All Use For RF & Microwave

MHC2500L03

3dB 90° Directional Coupler



MECSINE 兆讯


The MHC2500L03 port configurations depending on how input signals are split. The Case 1, Case 2, Case 3, and Case 4, configurations mean that one input signal is split into two output signals. When port 1 is defined, the other ports are defined automatically

Table 2. MHC2500L03 Port Configurations

Configuration	Port 1	Port 2	Port 3	Port 4
Case1.	Input	Isolated	Direct -3dB, -90°	Coupling -3dB, 0°
Case2.	Isolated	Input	Coupling -3dB, 0°	Direct -3dB, -90°
Case3.	Direct -3dB, -90°	Coupling -3dB, 0°	Input	Isolated
Case4.	Coupling -3dB, 0°	Direct -3dB, -90°	Isolated	Input

Outline Drawing

Figure 2. MHC2500L03 Outline Drawing

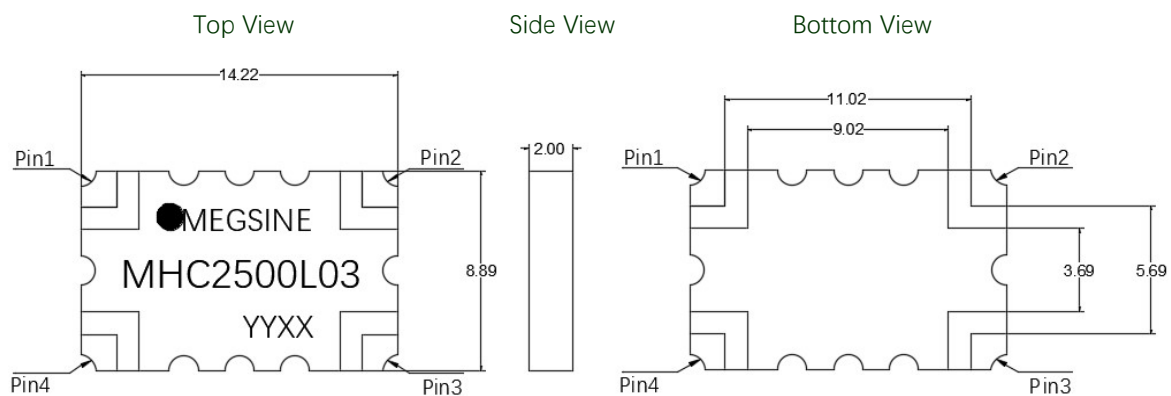

Unit: mm

Typical Performance (25°C, 2300-2700 MHz)

Figure 3. MHC2500L03 Coupling

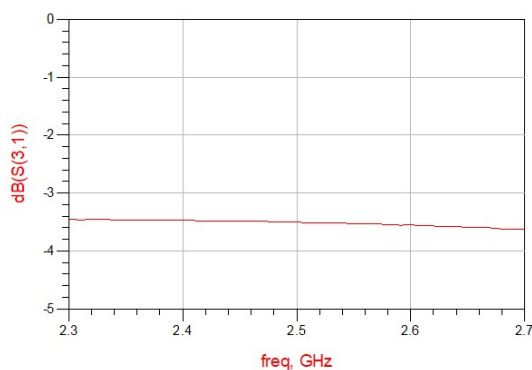


Figure 4. MHC2500L03 Transmission

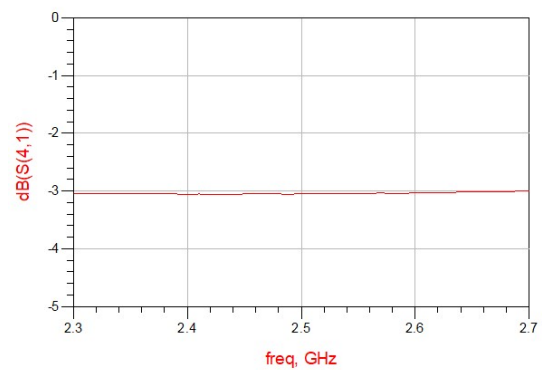


Figure 5. MHC2500L03 Return Loss (S11)

Figure 6. MHC2500L03 Return Loss (S22)

All Use For RF & Microwave

MHC2500L03

3dB 90° Directional Coupler

MiPD®

MECSINE 兆讯



Figure 7. MHC2500L03 Return Loss (S33)

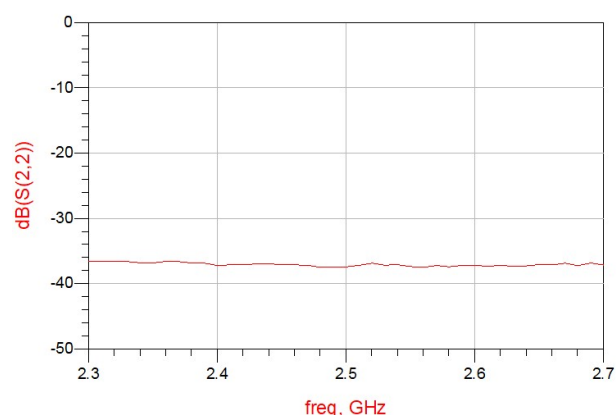


Figure 8. MHC2500L03 Return Loss (S44)

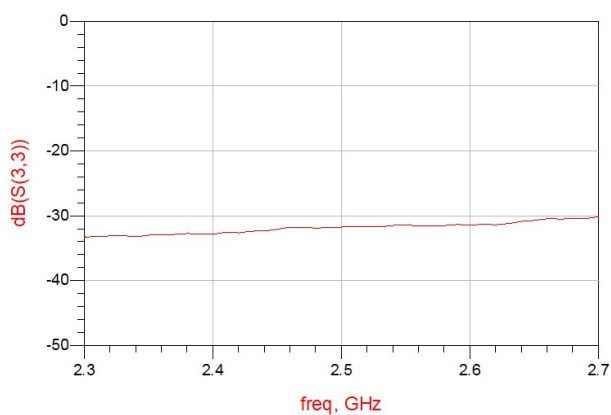


Figure 9. MHC2500L03 Isolation

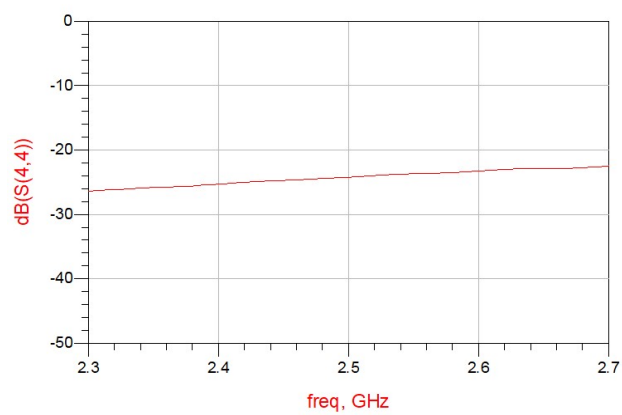


Figure 10. MHC2500L03 Phase


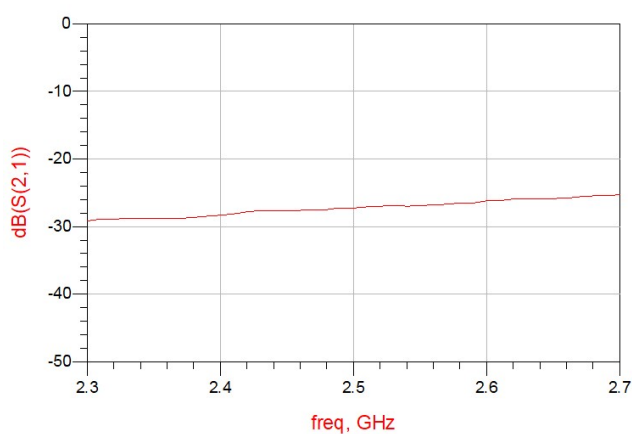


Figure 10. MHC2500L03 IL

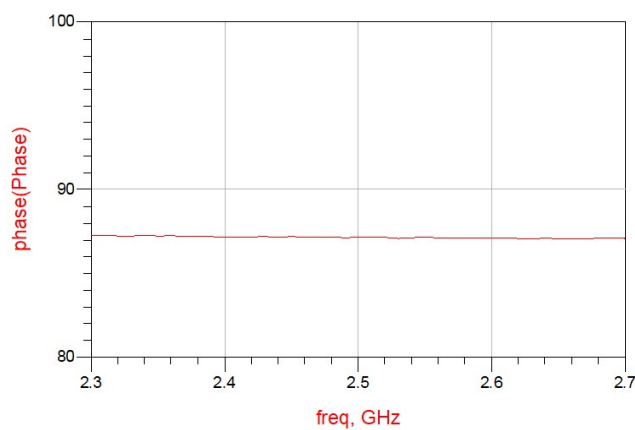


All Use For RF & Microwave

MHC2500L03

3dB 90° Directional Coupler



MECSINE 兆讯

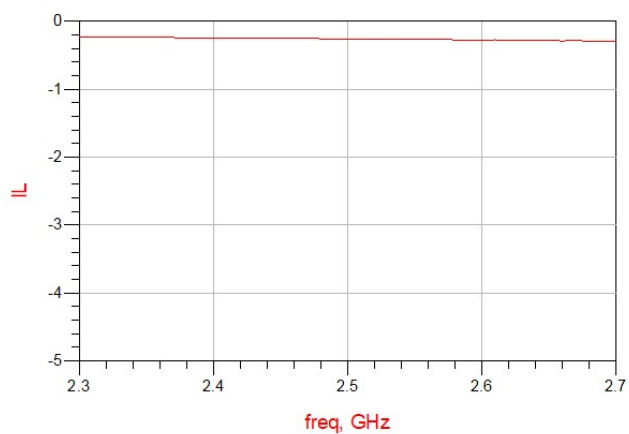

Definition of Measured Specifications

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com may contain us for future information
May. 09, 2023

MHC2500L03

3dB 90° Directional Coupler

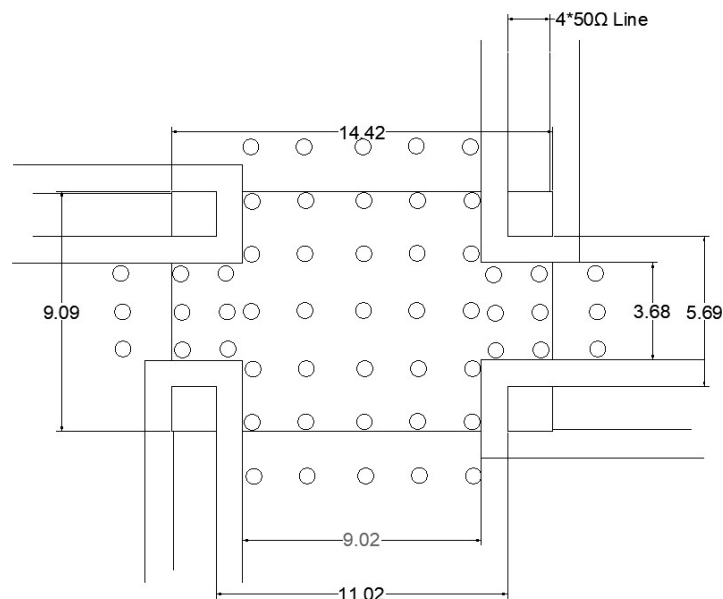


Table 3. Mathematical Formula for the MHC2500L03 Parameters

Parameter	Definition	Mathematical Representation
VSWR (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50W system. A VSWR of 1:1 is optimal.	$VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave
Return Loss	The impedance match of the coupler to a 50W system. Return Loss is an alternate means to express VSWR.	$\text{Return Loss (dB)} = 20 \log \frac{VSWR+1}{VSWR-1}$
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$\text{Insertion Loss (dB)} = 10 \log \frac{P_{in}}{P_{cp1} + P_{transmission}}$
Isolation	The input power divided by the power at the isolated port.	$\text{Isolation (dB)} = 10 \log \frac{P_{in}}{P_{iso}}$
Phase Balance	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmission port
Amplitude Balance	The power at each output divided by the average power of the two outputs.	$10 \log \frac{P_{cp1}}{P_{cp1} + P_{transmission}} \text{ and } 10 \log \frac{P_{transmission}}{P_{cp1} + P_{transmission}}$

Recommended PCB Layout

Figure 11. Recommended PCB Layout



All Use For RF & Microwave

MHC2500L03

3dB 90° Directional Coupler




MECSINE 兆讯

50Ω Line mm/inch

Reflow Profile

Figure 12. MHC2500L03 Thermal Reflow Profile

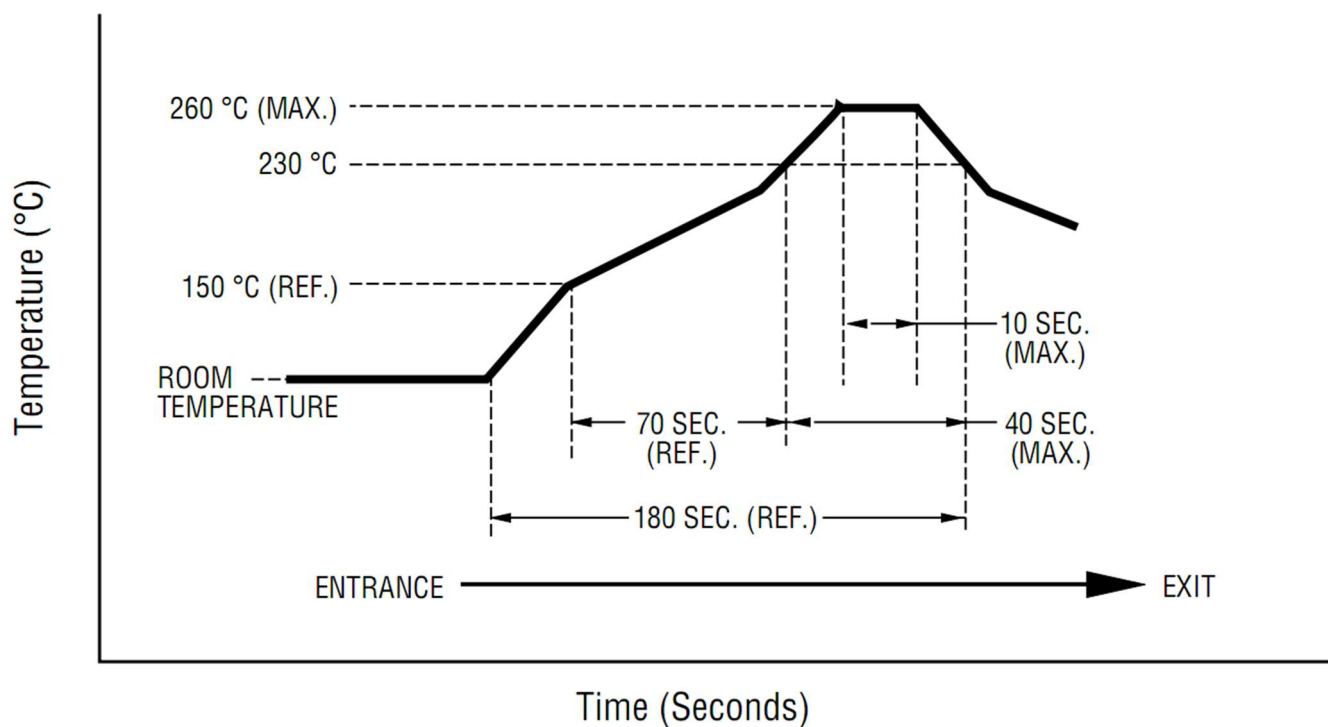

Packaging and Ordering Information

Table 4. MHC2500L03 Ordering Information

Device	Package	Reel	Shipping
MHC2500L03	14.22*8.89mm	7"	1000 Reel

All Use For RF & Microwave

MHC2500L03

3dB 90° Directional Coupler

MiPD[®]

MECSINE 兆讯

Revision	Description	Date
Rev0	Preliminary	2024/2/26

All Use For RF & Microwave