



TIMING WAVE FORM

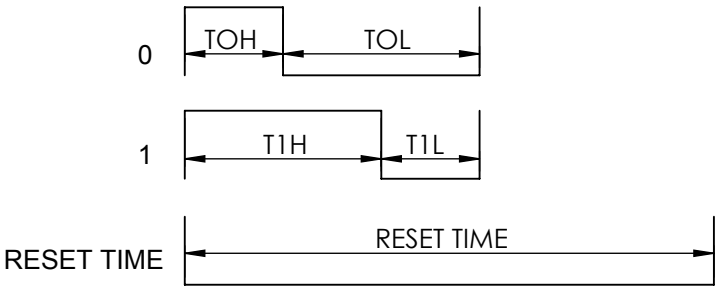


DATA TRANSFER TIME (TH+TL=1.2μs±600ns)

ITEM	DESCRIPTION	TYP.	ALLOWANCE
T0H	0 CODE, HIGH VOLTAGE TIME	0.3us	±80ns
T1H	1 CODE, HIGH VOLTAGE TIME	0.9us	±80ns
T0L	0 CODE, LOW VOLTAGE TIME	0.9us	±80ns
T1L	1 CODE, LOW VOLTAGE TIME	0.3us	±80ns
RES	LOW VOLTAGE TIME	ABOVE 50us	-


DATA COMMUNICATION

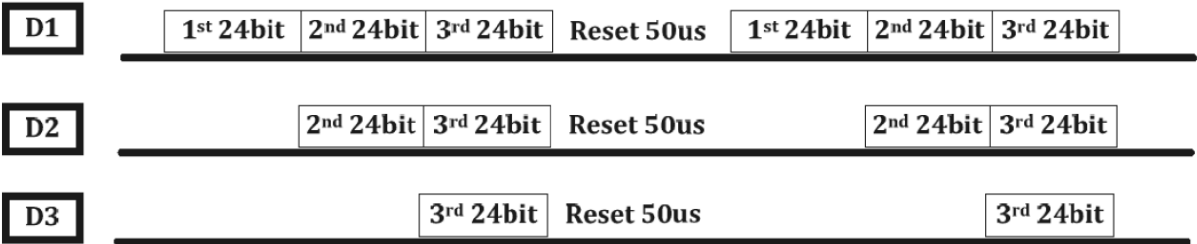


SINGLE DATA IN 24BIT FOR RGB

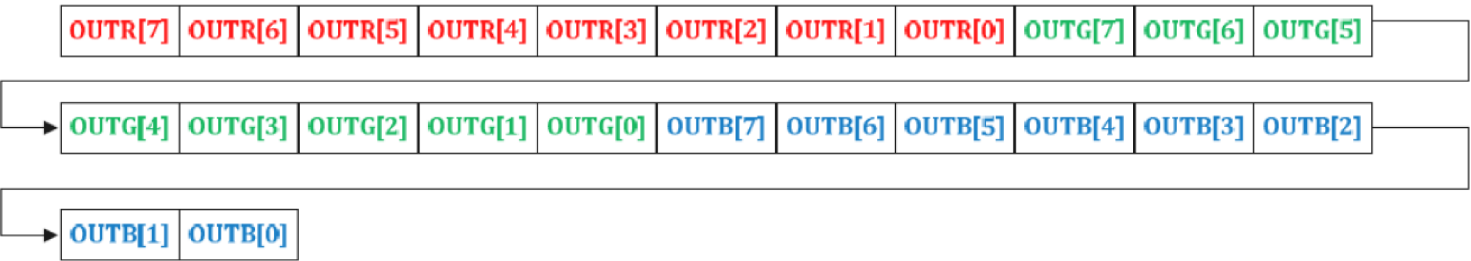


5V APPLICATION CIRCUIT

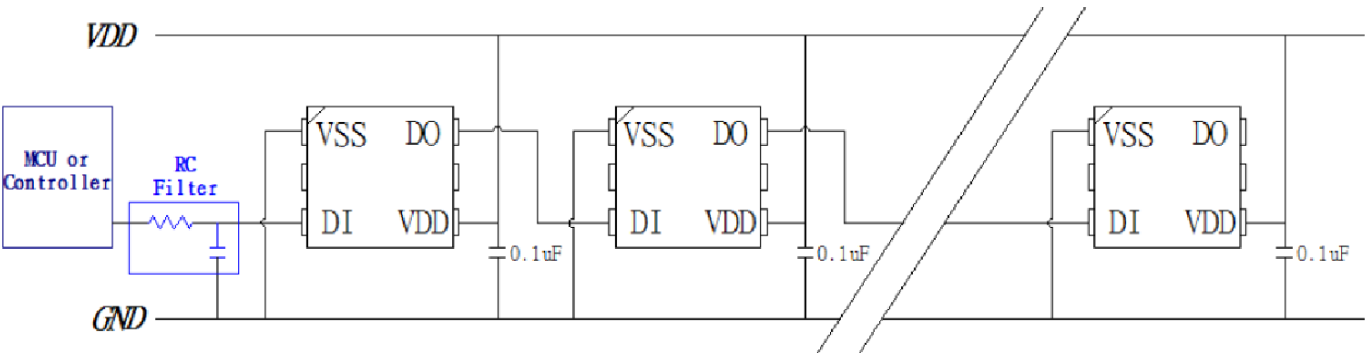

PROFILE

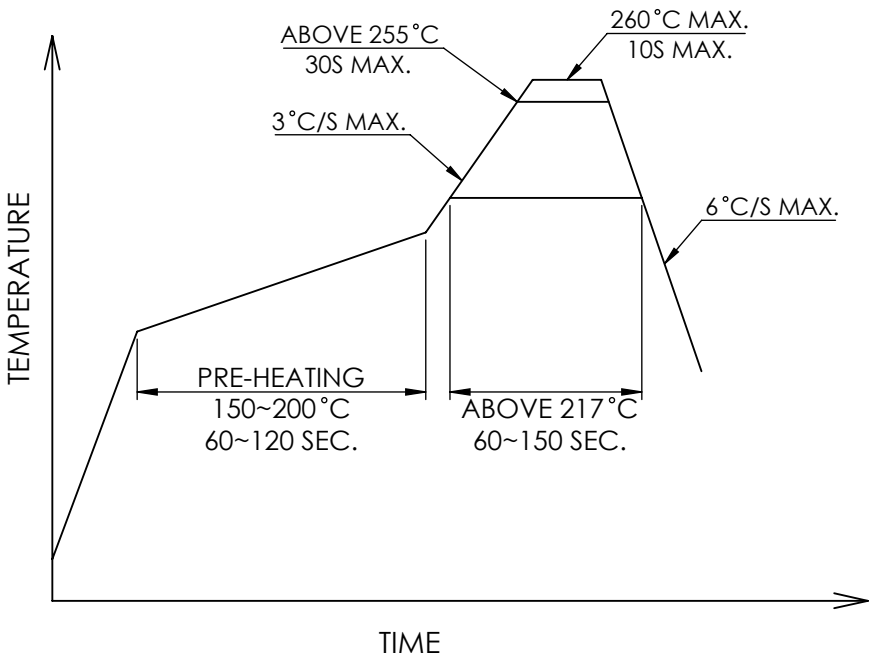

CARRIER TAPE DIMENSION

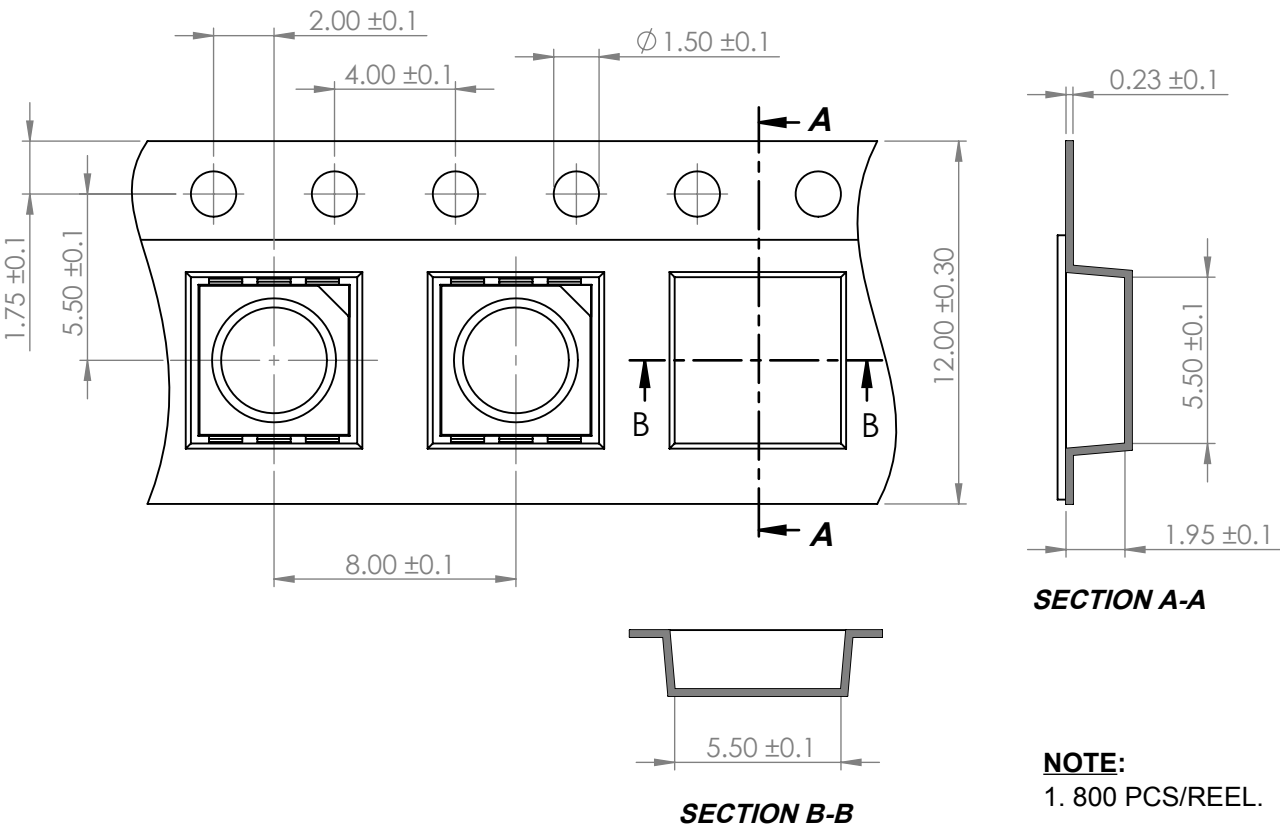

NOTE:
1. 800 PCS/REEL.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}/_{-0.00} MAX.= ^{+0.00}/_{-DECIMAL PRECISION}



425 N. GARY AVE.
CAROL STREAM, IL 60188
PHONE : 800-278-5666
FAX : 630-315-2150
WEB : WWW.LUMEX.COM

5.0(L)*5.0(W)*1.5(H)mm, SURFACE MOUNT LED, RGB FULL COLOR, 3-CHANNELs LED DRIVER WITH 8 bit PWM LINEAR CONTROL, WATER CLEAR LENS,TAPE & REEL

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL
KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE : 2018.10.23

DRAWN BY : C.C.

PAGE : 3 OF 4

CHKD BY : E.C.

SCALE : NTF

APRVD BY : G.Y.

UNIT : mm [INCH]

(Pb)

EXAMPLE OF USING STM32F030C8T6 TO DISPLAY RED, GREEN AND BLUE IN SEQUENCE

```

/*****/
uint32_t color;
void Display_One_Dot(uint32_t color);
void Send_Hi(void);
void Send_Lo(void);
void Init_GPIOs(void);
void main(void)
{
    Init_GPIOs();
    while (1)
    {
        color = 0xFF0000;
        Display_One_Dot(color);
        delay_ms(1000);
        color = 0x00FF00;
        Display_One_Dot(color);
        delay_ms(1000);
        color = 0x0000FF;
        Display_One_Dot(color);
        delay_ms(1000);
    }
}
/*****/
void Display_One_Dot(uint32_t color)
{
    uint8_t j=0;
    uint32_t x,y;
    y = color;
    for (j=0;j<24;j++)
    {
        x = (y & 0x800000);
        if (x>0)
            Send_Hi();
        else
            Send_Lo();
        y = y << 1;
    }
}

```

```

/*****/
void Send_Lo(void)
{
    GPIO_SetBits(GPIOB,GPIO_Pin_8);
    GPIO_ResetBits(GPIOB,GPIO_Pin_8);
    GPIO_ResetBits(GPIOB,GPIO_Pin_8);
    GPIO_ResetBits(GPIOB,GPIO_Pin_8);
}
/*****/
void Send_Hi(void)
{
    GPIO_SetBits(GPIOB,GPIO_Pin_8);
    GPIO_SetBits(GPIOB,GPIO_Pin_8);
    GPIO_SetBits(GPIOB,GPIO_Pin_8);
    GPIO_ResetBits(GPIOB,GPIO_Pin_8);
}
/*****/
void Init_GPIOs(void)
{
    GPIO_InitTypeDef GPIO_InitStructure;
    RCC_AHBPeriphClockCmd(RCC_AHBPeriph_GPIOB,ENABLE);
    GPIO_InitStructure.GPIO_Pin = GPIO_Pin_8 ;
    GPIO_InitStructure.GPIO_Mode = GPIO_Mode_OUT;
    GPIO_InitStructure.GPIO_OType = GPIO_OType_PP;
    GPIO_InitStructure.GPIO_PuPd = GPIO_PuPd_UP;
    GPIO_InitStructure.GPIO_Speed = GPIO_Speed_50MHz;
    GPIO_Init(GPIOB, &GPIO_InitStructure);
}

```