

Features

- Supply Voltage: 4.5 V to 40 V or ± 2.25 V to ± 20 V
- Offset Voltage: ± 15 μ V (Max)
- Differential Input Voltage Range to Supply Rail, can Work as Comparator
- Input Rail to $-V_S$, Rail-to-Rail Output
- Bandwidth: 12 MHz
- Slew Rate: 12 V/ μ s
- Over-Temperature Protection
- Low Noise: 6 nV/ $\sqrt{\text{Hz}}$ at 1 kHz
- 2-kV HBM, 1-kV CDM
- Operating Temperature Range: -40°C to 125°C


Applications

- Instrumentation
- Active Filters, ASIC Input or Output Amplifiers
- Sensor Interface
- Motor Control
- Industrial Control
- Low Noise Power Supply


Description

The TPA188x is a series of the newest high-supply voltage amplifiers with 15- μ V low offset, low noise, and stable high-frequency response. The TPA188x series incorporates proprietary and patented design techniques of 3PEAK to achieve excellent AC performance with 12-MHz bandwidth, 12-V/ μ s slew rate, and low distortion while drawing only 2000 μ A of quiescent current per amplifier. The input common-mode voltage range extends to $-V_S$, and the output swings rail-to-rail.

The TPA188x amplifiers have an over-temperature protection to guarantee chip safety. The outputs of the TPA188x series enter high impedance when the die temperature reaches around 170°C , and recover the function when the die temperature is down to around 150°C . These products have a very small power temperature coefficient, which is helpful for temperature-sensitive applications.

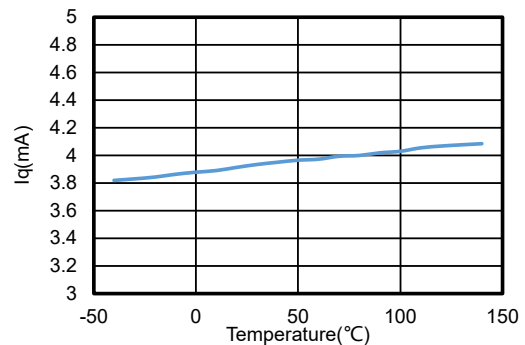

Typical Application Circuit

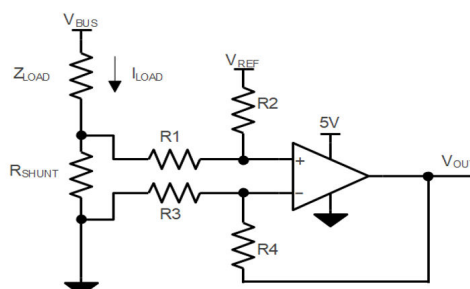

$$V_{\text{OUT}} = (I_{\text{LOAD}} \times R_{\text{SHUNT}}) \times (R_2 / R_1) + V_{\text{REF}}$$

$$\text{When } R_3 = R_1, R_2 = R_4, R_{\text{SHUNT}} \ll R_1$$

Table of Contents

Features.....	1
Applications.....	1
Description.....	1
Typical Application Circuit.....	1
Revision History.....	3
Pin Configuration and Functions.....	4
Specifications.....	6
Absolute Maximum Ratings ⁽¹⁾	6
ESD, Electrostatic Discharge Protection.....	6
Recommended Operating Conditions.....	6
Thermal Information.....	7
Electrical Characteristics.....	8
Typical Performance Characteristics.....	11
Detailed Description.....	14
Overview.....	14
Functional Block Diagram.....	14
Application and Implementation.....	15
Application Information.....	15
Typical Application.....	16
Tape and Reel Information.....	17
Package Outline Dimensions.....	18
SOT23-5.....	18
SOP8.....	19
MSOP8.....	20
Order Information.....	21
IMPORTANT NOTICE AND DISCLAIMER.....	22

Revision History

Date	Revision	Notes
2019-01-10	Rev.Pre.0	Pre-released version.
2020-05-19	Rev.A.0	Initial version.
2020-08-03	Rev.A.1	Added test figures.
2020-11-06	Rev.A.2	Updated test figures: I_Q vs. Temperature, V_{OUT} vs. I_{OUT} .
2021-07-07	Rev.A.3	Updated Absolute Maximum Ratings: • Updated the maximum value of Input Voltage: from $(+V_S) + 0.3$ to 40 V. • Updated the minimum value of Differential Input Voltage: $(+V_S)$ to $(-V_S) - (+V_S)$. • Updated the maximum value of Differential Input Voltage: $(-V_S)$ to $(+V_S) - (-V_S)$.
2022-08-18	Rev.A.4	Updated the Package Outline Dimensions format. Updated the working voltage to 40 V, and the Absolute Rating Voltage to 42 V.
2023-06-01	Rev.A.5	Updated the website address. Updated the working voltage description. Added the dual-supply description.
2024-12-18	Rev.A.6	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. Updated to a new datasheet format. Updated to a new format of Package Outline Dimensions. Updated the Tape and Reel Information.

Pin Configuration and Functions


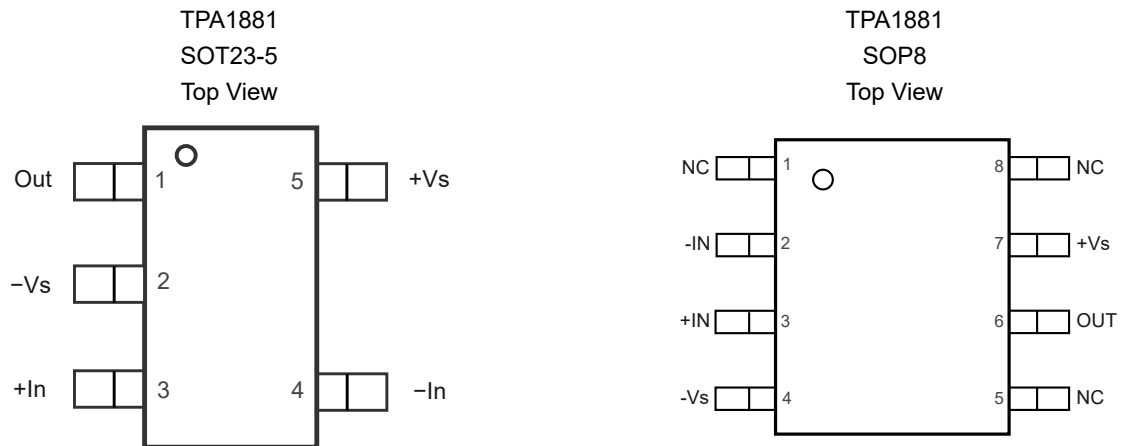


Table 1. Pin Functions: TPA1881

Pin No.		Name	I/O	Description
SOT23-5	SOP8			
1	6	Out	O	Output
2	4	-Vs		Negative power supply
3	3	+In	I	Non-inverting input
4	2	-In	I	Inverting input
5	7	+Vs		Positive power supply
	1	NC		Not connected
	5	NC		Not connected
	8	NC		Not connected

40-V, 12-MHz, Zero-Drift Operational Amplifier

TPA1882
SOP8
Top View

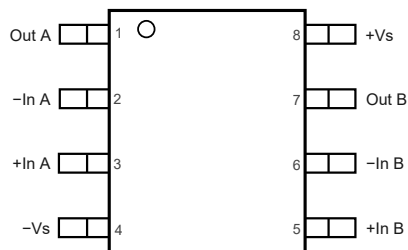

TPA1882
MSOP8
Top View

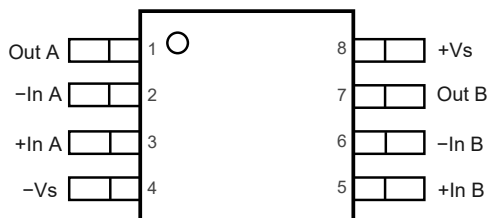


Table 2. Pin Fuctions: TPA1882

Pin No.	Name	I/O	Description
1	Out A	O	Output
2	-In A	I	Inverting input
3	+In A	I	Non-inverting input
4	-Vs		Negative power supply
5	+In B	I	Non-inverting input
6	-In B	I	Inverting input
7	Out B	O	Output
8	+Vs		Positive power supply

Specifications

Absolute Maximum Ratings ⁽¹⁾

All test conditions: over operating ambient temperature, unless otherwise noted.

Parameter		Min	Max	Unit
	Supply Voltage, $(+V_S) - (-V_S)$		42	V
	Input Voltage	$(-V_S) - 0.3$	42	V
	Differential Input Voltage	$(-V_S) - (+V_S)$	$(+V_S) - (-V_S)$	V
	Input Current: $+I_{IN}$, $-I_{IN}$ ⁽²⁾	-10	10	mA
	Output Voltage	$(-V_S) - 0.3$	$(+V_S) + 0.3$	V
	Output Short-Circuit Duration ⁽³⁾		Infinite	
T_J	Maximum Junction Temperature		150	°C
T_A	Operating Temperature Range	-40	125	°C
T_{STG}	Storage Temperature Range	-65	150	°C
T_L	Lead Temperature (Soldering, 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs are protected by ESD-protection diodes to the negative power supply. If the input extends more than 300 mV beyond the negative power supply, the input current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. The thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	1	kV
LU	Latch Up	JESD 78, 25°C	500	mA
		JESD 78, 125°C	200	mA

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
V_S	Supply Voltage, $(+V_S) - (-V_S)$	4.5 (± 2.25)		40 (± 20)	V
T_A	Operating Temperature Range	-40		125	°C

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOT23-5	250	81	°C/W
SOP8	158	43	°C/W
MSOP8	210	45	°C/W

Electrical Characteristics

All test conditions: $V_S = 30\text{ V}$, $T_A = 25^\circ\text{C}$, $R_L = 10\text{ k}\Omega$, unless otherwise noted.

Symbol	Parameter	Conditions	T_A	Min	Typ	Max	Unit
Power Supply							
V_S	Supply Voltage Range			4.5		40	V
I_Q	Quiescent Current per Amplifier	$V_S = 40\text{ V}$			2.4	3	mA
PSRR	Power Supply Rejection Ratio	$V_S = 30\text{ V}$			2	2.5	mA
		$V_S = 30\text{ V}$	$-40^\circ\text{C to } 125^\circ\text{C}$			2.7	mA
		$V_S = 5\text{ V}$			1.9	2.4	mA
		$V_S = 5\text{ V}$	$-40^\circ\text{C to } 125^\circ\text{C}$			2.6	mA
		$V_S = 4.5\text{ V to } 36\text{ V}$		135	155		dB
PSRR	Power Supply Rejection Ratio	$V_S = 4.5\text{ V to } 36\text{ V}$	$-40^\circ\text{C to } 125^\circ\text{C}$	130			dB
V_S	Supply Voltage Range			4.5		36	V
Input Characteristics							
V_{OS}	Input Offset Voltage	$V_S = 40\text{ V}, V_{CM} = 20\text{ V}$		-15		15	μV
		$V_S = 30\text{ V}, V_{CM} = 15\text{ V}$		-15		15	μV
			$-40^\circ\text{C to } 125^\circ\text{C}$	-25		25	μV
		$V_S = 5\text{ V}, V_{CM} = 2.5\text{ V}$		-15		15	μV
			$-40^\circ\text{C to } 125^\circ\text{C}$	-25		25	μV
$V_{OS\text{ TC}}$	Input Offset Voltage Drift		$-40^\circ\text{C to } 125^\circ\text{C}$		0.05	0.15	$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current				10		pA
			$-40^\circ\text{C to } 125^\circ\text{C}$		100		pA
I_{OS}	Input Offset Current				100		pA
I_{IN}	Different Input Current	$V_S = 36\text{ V}, V_{ID} = 36\text{ V}$				100	μA
			$-40^\circ\text{C to } 125^\circ\text{C}$			120	μA
C_{IN}	Input Capacitance	Differential mode			5		pF
		Common mode			2.5		pF
A_V	Open-Loop Voltage Gain	$R_{LOAD} = 10\text{ k}\Omega$, $V_{OUT} = 0.5\text{ V to } 29.5\text{ V}$		135	155		dB
			$-40^\circ\text{C to } 125^\circ\text{C}$	130			dB

40-V, 12-MHz, Zero-Drift Operational Amplifier

Symbol	Parameter	Conditions	T _A	Min	Typ	Max	Unit
V _{CMR}	Common-Mode Input Voltage Range			(-V _S)		(+V _S) – 1.5	V
CMRR	Common-Mode Rejection Ratio	V _{CM} = 0 V to 28.5 V		135	155		dB
			–40°C to 125°C	130			dB
Output Characteristics							
	Output Swing from Positive Rail	R _{LOAD} = 100 kΩ to V _S / 2			12	25	mV
			–40°C to 85°C			35	mV
			–40°C to 125°C			40	mV
		R _{LOAD} = 10 kΩ to V _S / 2			80	120	mV
			–40°C to 85°C			170	mV
			–40°C to 125°C			200	mV
		R _{LOAD} = 2 kΩ to V _S / 2			370	500	mV
			–40°C to 85°C			700	mV
			–40°C to 125°C			750	mV
	Output Swing from Negative Rail	R _{LOAD} = 100 kΩ to V _S / 2			5	25	mV
			–40°C to 85°C			30	mV
			–40°C to 125°C			30	mV
		R _{LOAD} = 10 kΩ to V _S / 2			30	80	mV
			–40°C to 85°C			95	mV
			–40°C to 125°C			105	mV
		R _{LOAD} = 2 kΩ to V _S / 2			140	300	mV
			–40°C to 85°C			450	mV
			–40°C to 125°C			500	mV
I _{sc}	Output Short-Circuit Current	Source		70	95		mA
			–40°C to 85°C	55			mA

40-V, 12-MHz, Zero-Drift Operational Amplifier

Symbol	Parameter	Conditions	T _A	Min	Typ	Max	Unit
I _{SC}	Output Short-Circuit Current	Source	–40°C to 125°C	50			mA
		Sink		130	150		mA
			–40°C to 85°C	100			mA
			–40°C to 125°C	85			mA
AC Specifications							
GBW	Gain-Bandwidth Product				12		MHz
SR	Slew Rate	G = 1, 10-V step		8	12		V/μs
			–40°C to 125°C	7			V/μs
t _{OR}	Overload Recovery				500		ns
t _S	Settling Time, 0.1%	G = 1, 10-V step			5		μs
	Settling Time, 0.01%				7		μs
PM	Phase Margin	R _L = 10 K, C _L = 50 pF			60		°
GM	Gain Margin	R _L = 10 K, C _L = 50 pF			10		dB
Noise Performance							
E _N	Input Voltage Noise	f = 0.1 Hz to 10 Hz			0.1		μV _{PP}
e _N	Input Voltage Noise Density	f = 0.1 kHz			6		nV/√Hz
		f = 1 kHz			6		nV/√Hz
		f = 10 kHz			7		nV/√Hz
i _N	Input Current Noise	f = 10 kHz			200		fA/√Hz
THD+N	Total Harmonic Distortion and Noise	f = 1 kHz, G = 1, R _L = 10 kΩ, V _{OUT} = 6 V _{RMS}			0.0002		%

Typical Performance Characteristics

All test conditions: $V_S = \pm 15\text{ V}$, $V_{CM} = 0\text{ V}$, $R_L = 10\text{ k}\Omega$, unless otherwise noted.

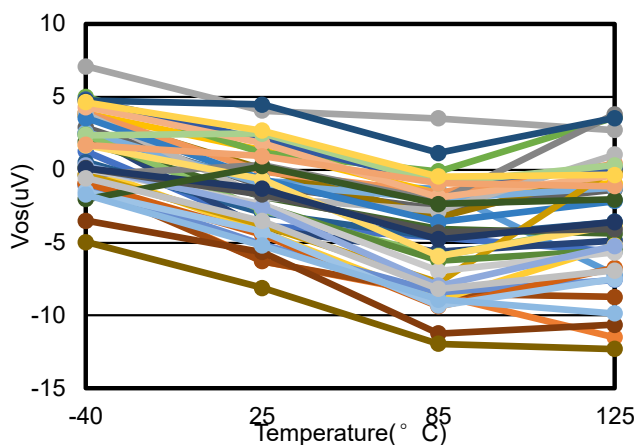


Figure 1. V_{OS} at 30 V V_S , 15 V V_{CM} vs. Temperature, 40 pcs

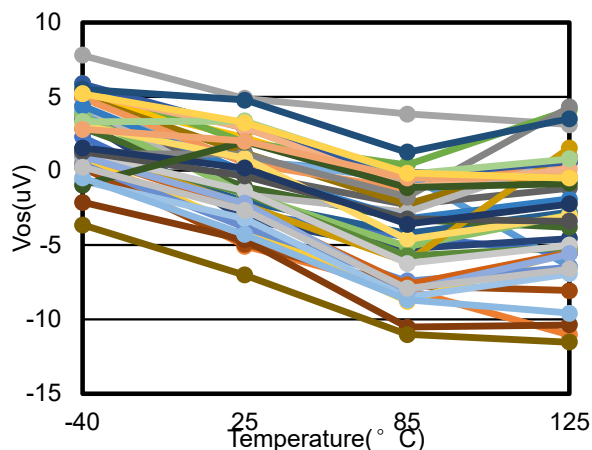


Figure 2. V_{OS} at 5 V V_S , 2.5 V V_{CM} vs. Temperature, 40 pcs

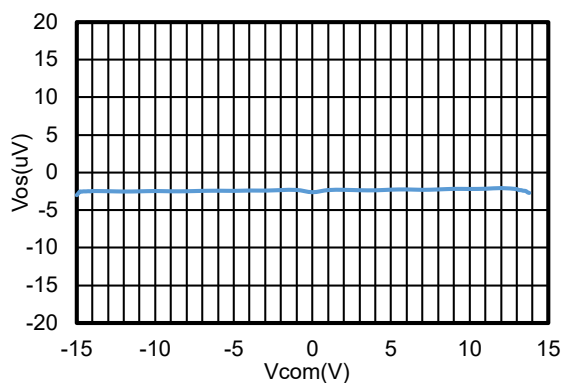


Figure 3. Offset Voltage vs. Common-Mode Voltage

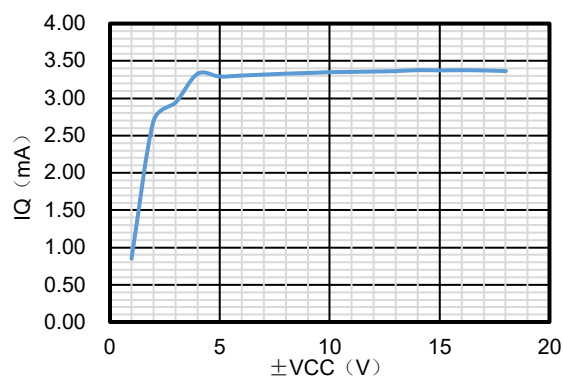


Figure 4. I_Q vs. Supply Voltage

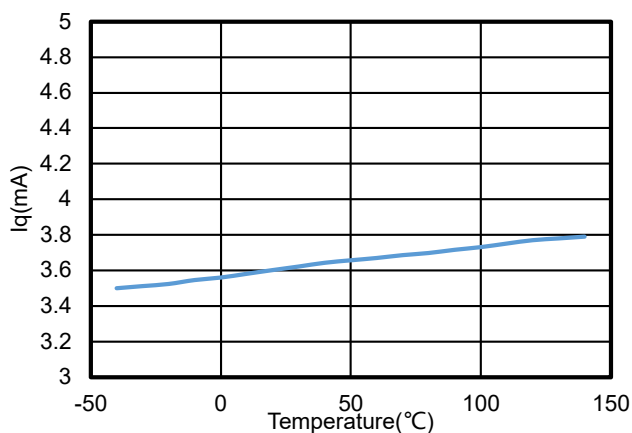


Figure 5. I_Q vs. Temperature, $\pm 2.5\text{-V}$ Supply, TPA1882

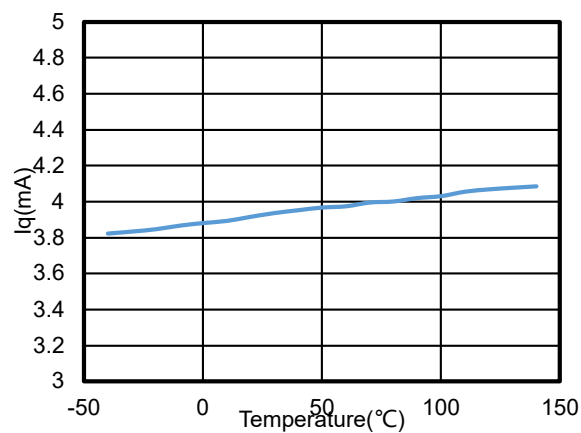


Figure 6. I_Q vs. Temperature, $\pm 15\text{-V}$ Supply, TPA1882

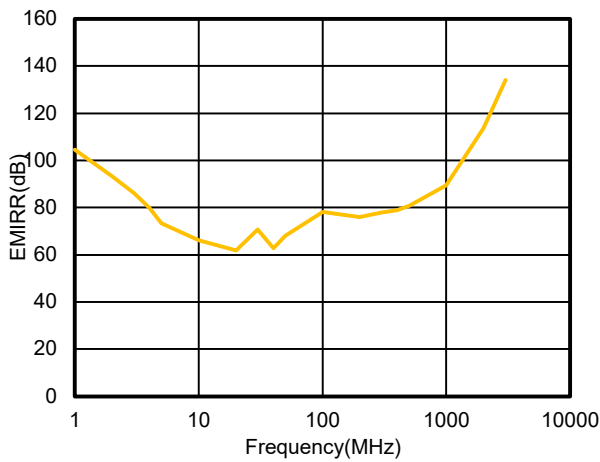


Figure 7. EMIRR vs. Frequency

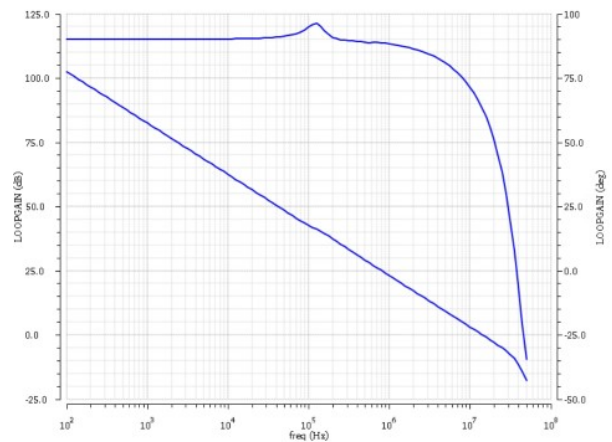
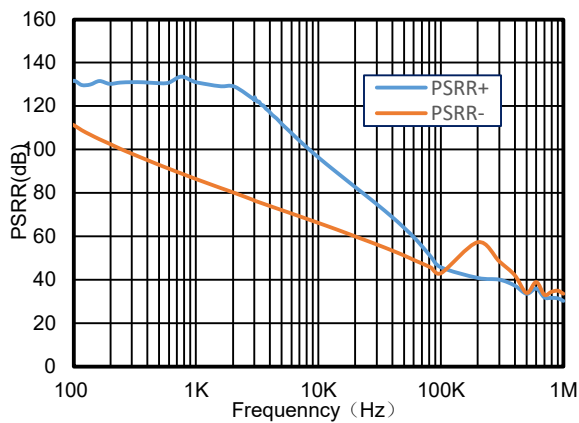

Figure 8. Open-Loop Gain and Phase vs. Frequency, $R_L = 10\text{ k}\Omega$, $C_L = 50\text{ pF}$


Figure 9. PSRR vs. Frequency


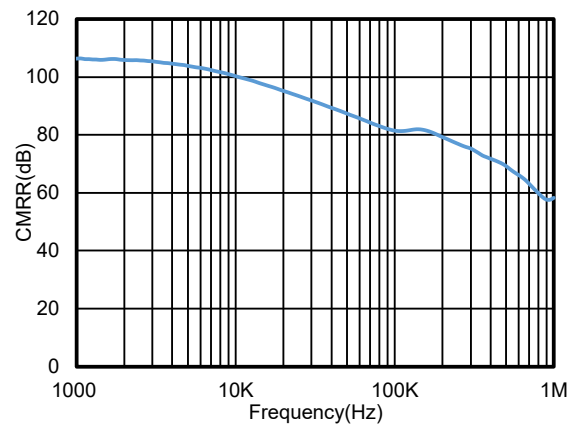


Figure 10. Negative Overload Recovery

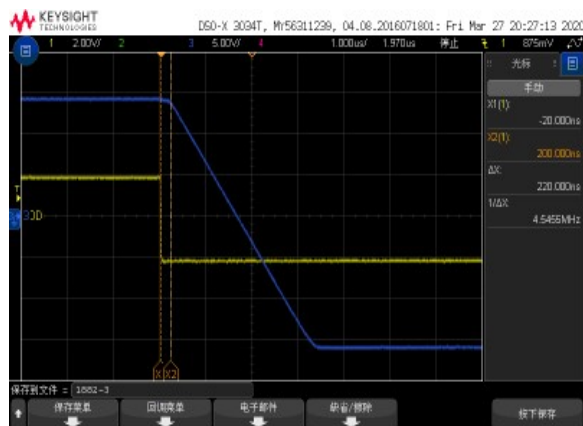

Time: 2 us/div, Measure Time: 220 ns

 $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $G = 10$


Figure 11. Positive Overload Recovery



Time: 2 us/div, Measure Time: 420 ns

 $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $G = 10$


Figure 12. Negative Overload Recovery

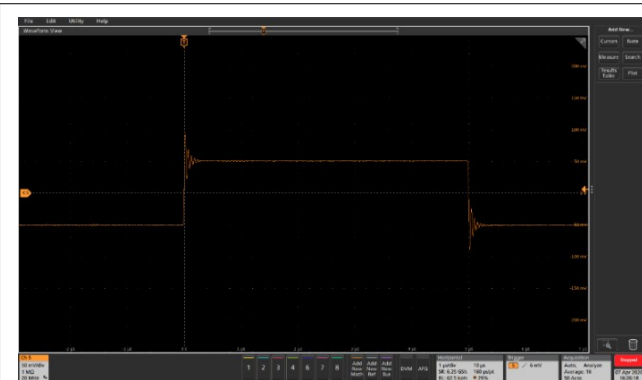40-V, 12-MHz, Zero-Drift Operational Amplifier


Voltage: 50 mV/div, Time: 2 us/div

$R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $G = 1$

Figure 13. 100-mV Signal Step Response

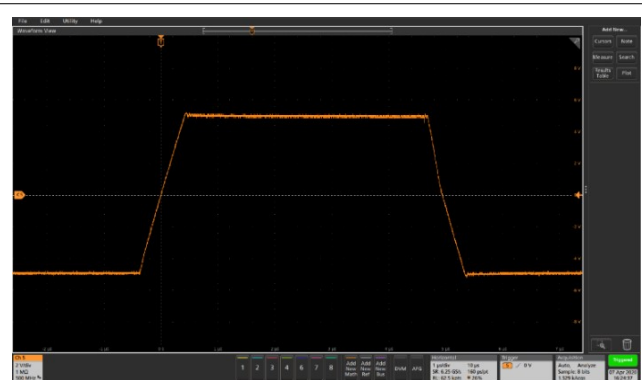

Voltage: 2 V/div, Time: 2 μ s/div

$R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, $G = 1$

Figure 14. 10-V Signal Step Response

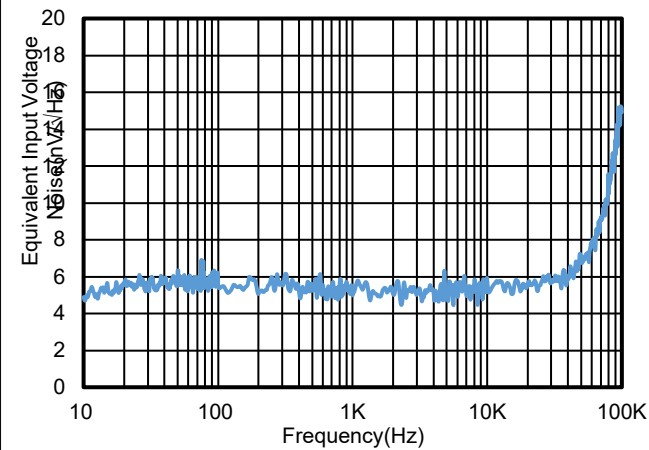


Figure 15. Voltage Noise Spectral Density vs. Frequency

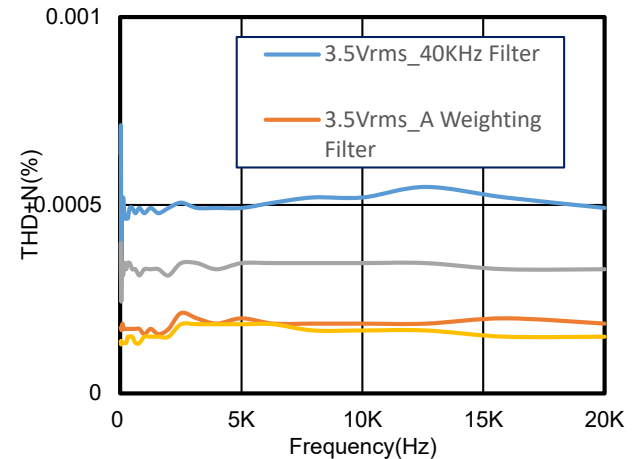


Figure 16. V_{OUT} vs. I_{OUT} , Sink

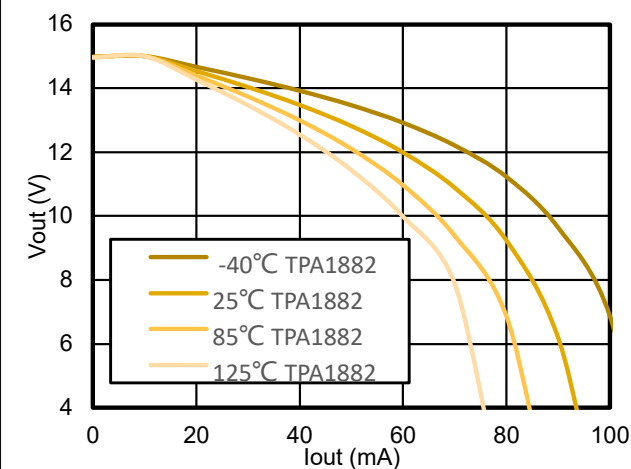


Figure 17. V_{OUT} vs. I_{OUT} , Source

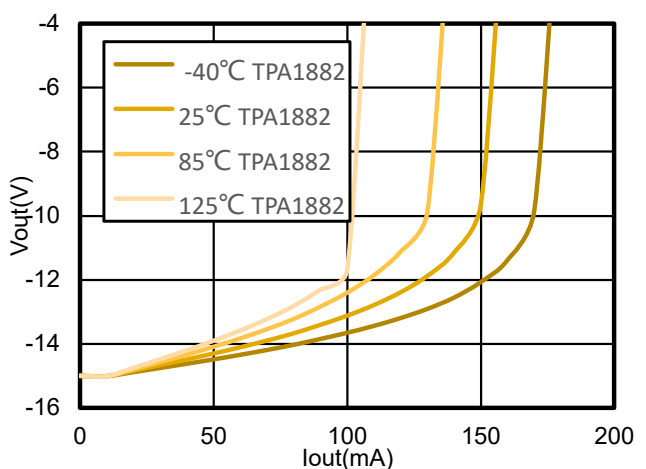


Figure 18. V_{OUT} vs. I_{OUT} , Sink

Detailed Description

Overview

The TPA188x is a series of op amps that operate on a single-supply voltage (4.5 V to 40 V), or a split-supply voltage (± 2.25 V to ± 20 V), making them highly versatile and easy to use. The power-supply pins should have local-bypass ceramic capacitors (typically 0.01 μ F to 0.1 μ F). Parameters that exhibit variance with regard to operating voltage or temperature are presented in [Typical Performance Characteristics](#).

Functional Block Diagram

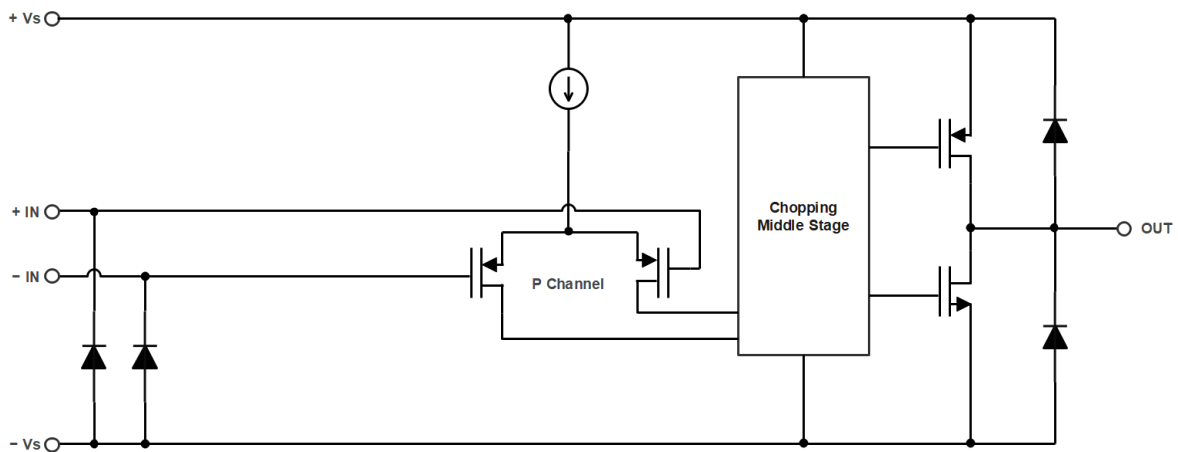


Figure 19. Functional Block Diagram

Application and Implementation


Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

Low-Side Current-Sensing Application

Figure 20 shows the TPA188x configured in a low-side current-sensing application. The low-side current-sensing methods include placing a sense resistor between the load and the circuit ground. The voltage dropping across the resistor is amplified by different amplifier circuits with the TPA188x. V_{REF} can be used to add the bias voltage to the output voltage. Particular attention must be paid to the matching and precision of R1, R2, R3, and R4, to maximize the accuracy of the measurement.

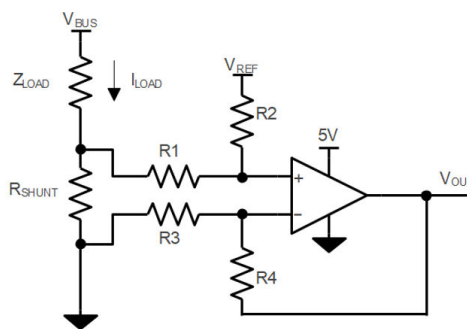

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$

$$\text{When } R3 = R1, R2 = R4, R_{SHUNT} \ll R1$$


Figure 20. Dual-Supply Operation Connections

Power Supply Recommendations

Place 0.1-μF bypass capacitors close to the power supply pins to reduce coupling errors from the noise or high-impedance power supplies.

Typical Application

Figure 21 shows the typical application schematic.

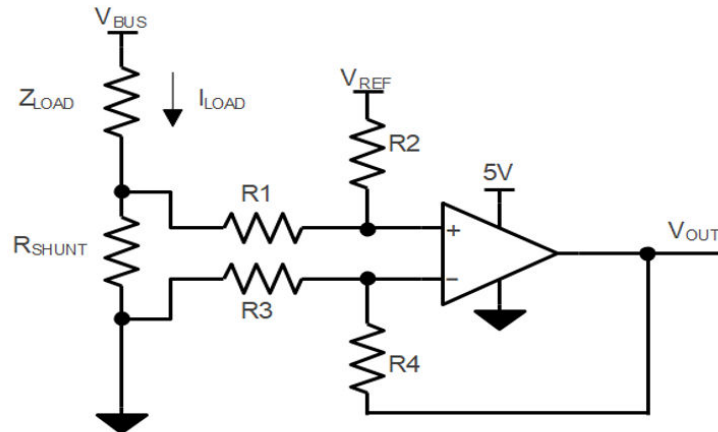


$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R_2 / R_1) + V_{REF}$$

When $R_3 = R_1$, $R_2 = R_4$, $R_{SHUNT} \ll R_1$

Figure 21. Typical Application Circuit

Tape and Reel Information

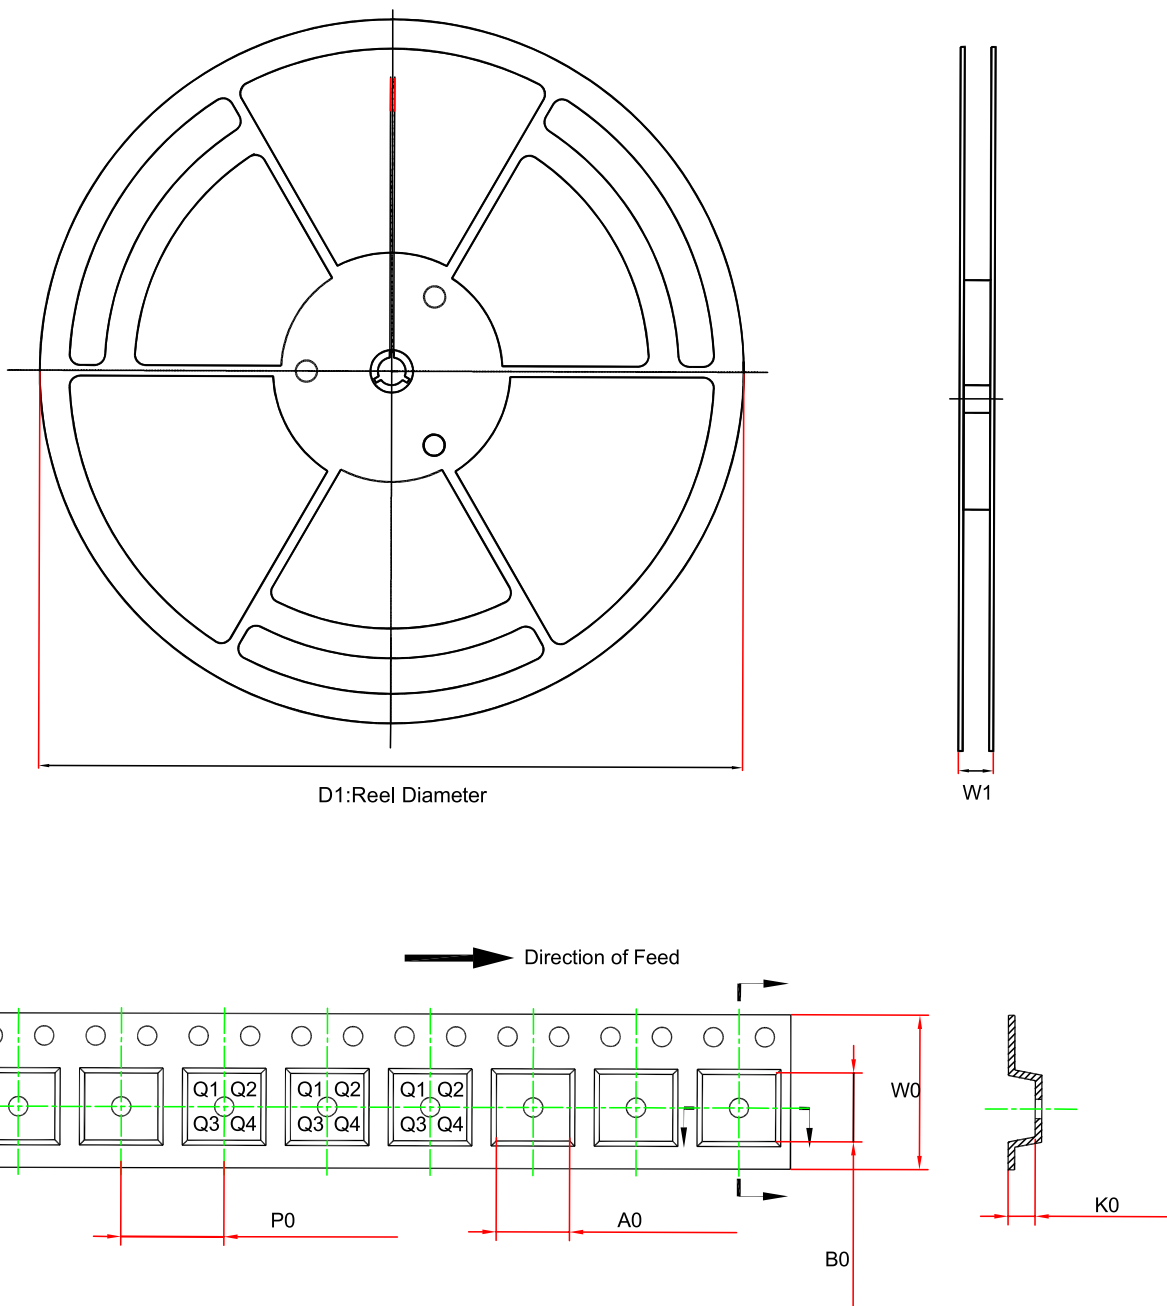

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) ⁽¹⁾	B0 (mm) ⁽¹⁾	K0 (mm) ⁽¹⁾	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA1881-TR	SOT23-5	180.0	13.1	3.2	3.2	1.4	4.0	8.0	Q3
TPA1881-SR	SOP8	330.0	17.6	6.4	5.4	2.1	8.0	12.0	Q1
TPA1882-SR	SOP8	330.0	17.6	6.4	5.4	2.1	8.0	12.0	Q1
TPA1882-VR	MSOP8	330.0	17.6	5.2	3.3	1.5	8.0	12.0	Q1





(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions

SOT23-5

Package Outline Dimensions


S5T(SOT23-5-A)

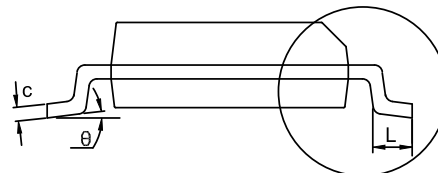

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.150	0.000	0.006
A2	1.000	1.200	0.039	0.047
b	0.280	0.500	0.011	0.020
c	0.100	0.230	0.004	0.009
D	2.820	3.020	0.111	0.119
E	2.600	3.000	0.102	0.118
E1	1.500	1.720	0.059	0.068
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°

NOTES





1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

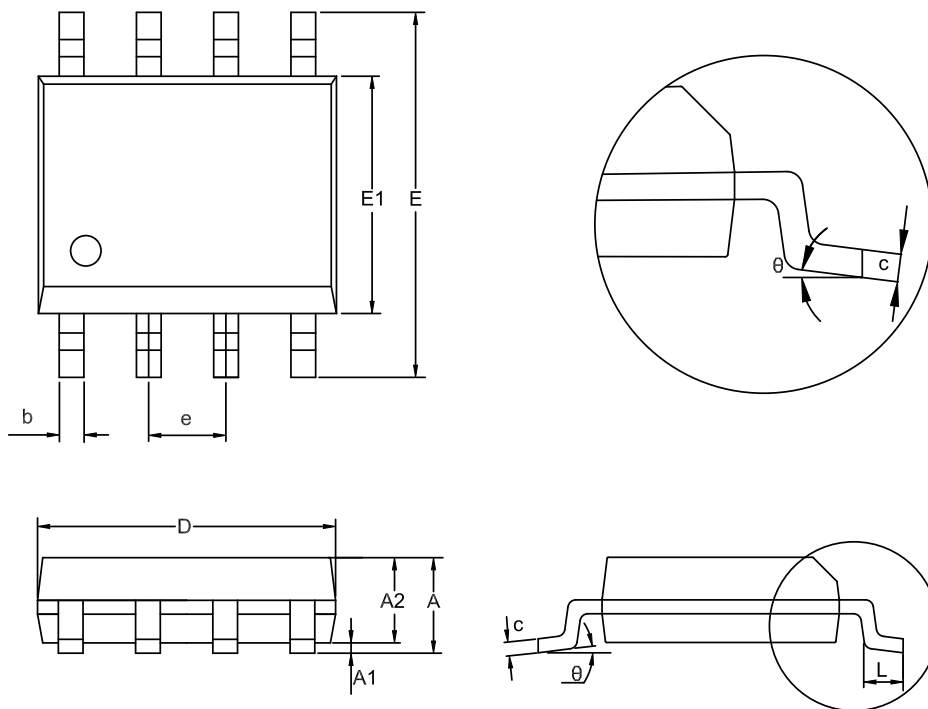SOP8
Package Outline Dimensions
SO1(SOP-8-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.550	0.049	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

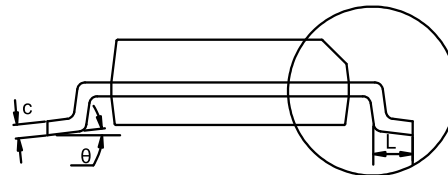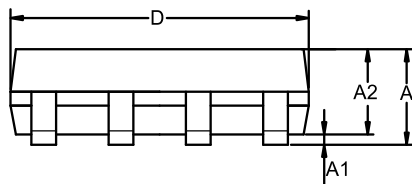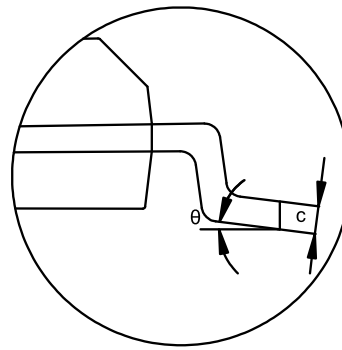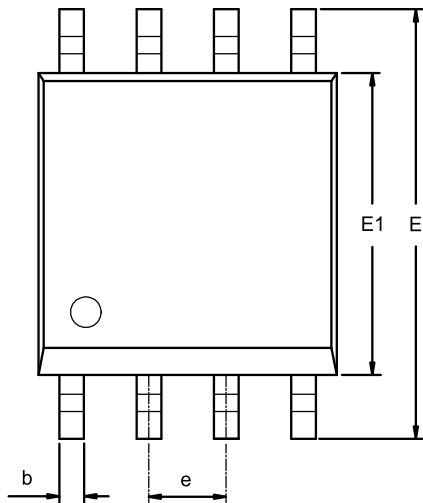MSOP8
Package Outline Dimensions
VS1(MSOP-8-A)


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	4.700	5.100	0.185	0.201
E1	2.900	3.100	0.114	0.122
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPA1881-SR	-40 to 125°C	SOP8	1881	3	Tape and Reel, 4000	Green
TPA1881-TR	-40 to 125°C	SOT23-5	A88	3	Tape and Reel, 3000	Green
TPA1882-SR	-40 to 125°C	SOP8	1882	3	Tape and Reel, 4000	Green
TPA1882-VR	-40 to 125°C	MSOP8	1882	3	Tape and Reel, 3000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.