


nichicon

series

- Products which are scheduled to be discontinued.
Not recommended for new designs



Item	Performance Characteristics		
Category Temperature Range	- 25 to + 60°C		
Rated Voltage Range	2.5V		
Rated Capacitance Range	470 to 3300F See Note		
Capacitance Tolerance	± 20% (20°C)		
Leakage Current	0.5C (mA) [C : Rated Capacitance(F)] (After 30 minutes' application of rated voltage, 2.5V)		
Stability at Temperature	Capacitance (- 25°C) /Capacitance (+20°C) ×100 ≥ 70%		
DCR*	Refer to the list below (20°C). *DC internal resistance		
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 60°C.	Capacitance change	Within ±30% of initial value
		DCR	300% or less of initial specified value
		Leakage current	Less than or equal to the initial specified value
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after storing the capacitors under no load for 2000 hours at 60°C.	Capacitance change	Within ±30% of initial value
		DCR	300% or less of initial specified value
		Leakage current	Less than or equal to the initial specified value
Marking	Printed with white color letter on black sleeve.		


Technical drawing of the 35mm pressure washer lance, showing side and top views with dimensions.

Side View Dimensions:

- Overall diameter: $\phi 35$
- Bottom plate
- Sleeve
- Hexagonal headed bolt (M5)
- Distance from bottom plate to start of sleeve: 10
- Distance from start of sleeve to end of lance: 15 ± 0.5
- Distance from bottom plate to end of lance: $L + 3 \text{ MAX.}$
- Distance from bottom plate to start of sleeve: 6 ± 1
- Distance from start of sleeve to end of lance: 12.7 ± 1
- Total length: $35 \pm 2 \text{ MAX.}$

Top View Dimensions:

- Pressure relief vent
- Angle: 30°
- Distance from center to side port: 24
- Distance from center to bottom port: 29 ± 1
- Distance from center to side port (inner): 7
- Distance from center to side port (outer): 10
- Distance from center to side port (inner): 3.5
- Distance from center to side port (outer): 45 ± 1

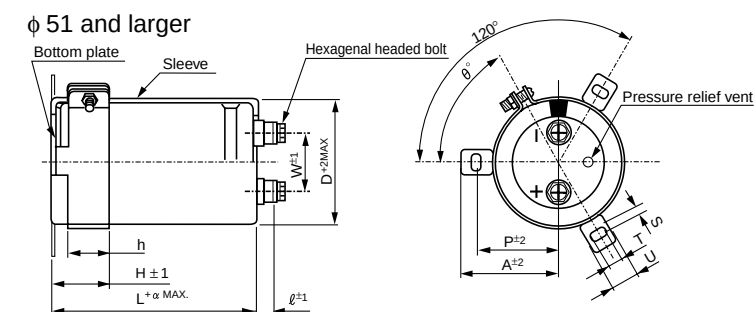

1 2 3 4 5 6 7 8 9 10 11 12 13 14

J J C 0 E 4 7 7 M S E C

Mounting bracket

Case dia. code (φ35)

Code less	2-leg brackets
BN	No brackets

(φ51 to φ90)

Code less	3-leg brackets
BB	2-leg brackets
BN	No bracket

Configuration ※

Capacitance tolerance (±20%)

Rated Capacitance (470F)

Rated voltage (2.5V)


Series name

Type

φD	Code
35	C
51	F
63.5	G
76.2	H
90	J

※ Configuration

Cr (III) Plating (RoHS compliant)
SE



Rated Voltage (Code)	Cap. (F)	Cap. code	DCR (mΩ)	Case size $\phi D \times L$ (mm)	
				ϕD	L
2.5V (0E)	470	477	16	35	120
	1000	108	9	51	120
	1200	128	8		160
	1500	158	7		120
	1800	188	6	63.5	160
	2200	228	5		120
	2700	278	5	76.2	160
	3300	338	4		90

- | ϕ D | W | ℓ | α | Nominal of bolt |
|----------|------|--------|----------|-----------------|
| 51 | 22.0 | 6 | 3 | M5 |
| 63.5 | 28.6 | 6 | 3 | M5 |
| 76.2 | 31.8 | 6 | 3 | M5 |
| 90 | 31.8 | 6 | 3 | M5 |

	3-Legs				2-Legs			
ϕ D Symbol	51	63.5	76.2	90	51	63.5	76.2	90
P	32.5	38.1	44.5	50.8	33.2	40.5	46.5	53
A	38.5	43	49.2	58.5	40	46.5	53	59
T	7.5	8.0	7.0	8.0	6.0	7.0	6.0	6.0
S	5.0	5.0	5.0	5.0	4.5	4.5	4.5	4.5
U	12	14	14	18	14	14	14	14
θ°	60	60	60	60	30	30	30	30
H	20	25	30	35	25	35	35	35
h	15	20	24	25	15	20	20	20

$$\text{Capacitance (F)} = i \times \Delta T$$

CAT.8100X