



General Description

The LM2940IMPX-xx/NOPB series of adjustable and fixed voltage regulators are designed to provide 1 A output current and to operate down to 2.3V input-to-output differential. The input voltage can up to +35V maximum. It has very good output short protect function than normal others LDO. And LM2940IMPX-xx/NOPB can output larger current than normal LDO when same application condition.

On-chip trimming adjusts the reference voltage to within 2% accuracy. Current limit is also trimmed, minimizing the stress under overload conditions on both the regulator and power source circuitry.

The LM2940IMPX-xx/NOPB devices are pin compatible with other three-terminal SCS regulators and are offered in the low profile surface mount SOT-223 package.

Feature

- ◆ Three Terminal Adjustable or Fixed Voltages*
3.3V or 5.0V
- ◆ Output Current of 1A
- ◆ Operates Down to 2.3V Dropout
- ◆ Line Regulation: 0.2% Max.
- ◆ Load Regulation: 0.4% Max.
- ◆ SOT-223


Applications

- ◆ High Efficiency Linear Regulators
- ◆ VGA Notebook
- ◆ Battery Chargers
- ◆ Battery Powered Instrumentation

PIN Configuration

FIXED
VERSION
1- Vin
2- Ground
3- V_{out}

SOT-223 Top View



Part Number	Packing
LM2940IMPX-xx/NOPB	1K/REEL

xx: 33,50.

Absolut Maximum Ratings (Note 1)

Power Dissipation	Internally limited	Soldering information	
Input Voltage	37V	Lead Temperature (10 sec)	300°C
Operating Junction Temperature		Thermal Resistance	
Control Section	-15°C to 125°C	SOT-223 package	$\phi JA = 90^{\circ}\text{C/W}^*$
Power Transistor	0°C to 150°C	* With package soldering to copper area over backside ground plane or internal power plane ϕJA can vary from 46°C/W to >90°C/W depending on mounting technique and the size of the copper area.	
Storage temperature	- 65°C to +150°C		



Electrical Characteristics

Electrical Characteristics at $I_{OUT} = 0 \text{ mA}$, and $T_J = +25^\circ\text{C}$ unless otherwise specified.

Parameter	Device	Conditions	Min	Typ	Max	Units
Output Voltage	$I_{OUT} = 5\text{V}$	$0 \leq I_{OUT} \leq 1\text{A}$, $6.5\text{V} \leq V_{IN} \leq 12\text{V}$	4.800	5.000	5.200	V
Line Regulation	$I_{OUT} = 5\text{V}$	$6.5\text{V} \leq V_{IN} \leq 12\text{V}$		10	50	%
Load Regulation (Notes 2, 3)	$I_{OUT} = 5\text{V}$	$V_{IN}=8\text{V}$, $0 \leq I_{OUT} \leq 1\text{A}$		10	100	%
Dropout Voltage ($V_{IN} - V_{OUT}$)	$I_{OUT} = 5\text{V}$	ΔV_{OUT} , $\Delta V_{REF} = 1\%$, $I_{OUT} = 1\text{A}$ (Note 4)			2.5	V
Current Limit	$I_{OUT} = 5\text{V}$	$(V_{IN} - V_{OUT}) = 5\text{V}$	900	1,000	1,500	mA
Minimum Load Current		$(V_{IN} - V_{OUT})$ $= 12\text{V}$ (Note 5)		5	10	mA
Quiescent Current	$I_{OUT} = 5\text{V}$	$V_{IN} \leq 12\text{V}$		10	15	mA
Ripple Rejection		$f = 120\text{Hz}$, $C_{OUT} = 22\mu\text{F}$ Tantalum, $I_{OUT} = 1\text{A}$, $(V_{IN}-V_{OUT})$ $= 3\text{V}$, $C_{ADJ} = 10\mu\text{F}$	60	75		dB
	$I_{OUT} = 5\text{V}$	$f = 120\text{Hz}$, $C_{OUT} = 22\mu\text{F}$ Tantalum, $I_{OUT} = 1\text{A}$, $V_{IN} = 6\text{V}$	60	68		dB
Thermal Regulation		$T_A = 25^\circ\text{C}$, 30ms pulse		0.008	0.04	%W
Temperature Stability				1		%
Long Term Stability		$T_A = 125^\circ\text{C}$, 1000Hrs		0.3	1	%
RMS Output Noise (% of V_{OUT})		$T_A = 25^\circ\text{C}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		0.003		%
Thermal Resistance Junction-to-Case					15	$^\circ\text{C/W}$

Parameters identified with boldface type apply over the full operating temperature range.

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed.

Note 2: Line and Load regulation are guaranteed up to the maximum power dissipation of 1.2 W. Power dissipation is determined by the input/output differential and the output current. Guaranteed maximum power dissipation will not be available over the full input/output range.

Note 3: See thermal regulation specifications for changes in output voltage due to heating effects. Line and load regulation are measured at a constant junction temperature by low duty cycle pulse testing. Load regulation is measured at the output lead $\sim 1/8"$ from the package.

Note 4: Dropout voltage is specified over the full output current range of the device.



Note 5: Minimum load current is defined as the minimum output current required to maintain regulation. When $2.5V \leq (V_{IN} - V_{OUT}) \leq 20V$ the device is guaranteed to regulate if the output current is greater than 10mA.

Application Hints

The LM2940IMPX-xx/NOPB series of adjustable and fixed regulators are easy to use and are protected against short circuit and thermal overloads. Thermal protection circuitry will shut-down the regulator should the junction temperature exceed 165°C at the sense point. Pin compatible with older three terminal adjustable regulators, these devices offer the advantage of a lower dropout voltage, more precise reference tolerance and improved reference stability with temperature.

Stability

The circuit design used in the LM2940IMPX-xx/NOPB series requires the use of an output capacitor as frequency compensation. The addition of $10\mu\text{F}$ tantalum or $22-200\mu\text{F}$ aluminum on the output will ensure stability for all operating conditions. When adjustment terminal is bypassed with a capacitor to improve ripple rejection, the requirement for output capacitor increases. The value of $22\mu\text{F}$ tantalum or $100\mu\text{F}$ aluminum covers all cases of bypassing the adjustment terminal. Without bypassing the adjustment terminal smaller capacitors can be used with equally good results. current paths on the LM2940IMPX-xx/NOPB adjustment pin, therefore even with capacitors on the adjustment pin no protection diode is needed to ensure device safety under short-circuit conditions. Diodes between the input and output are not usually needed. Microsecond surge currents of 50A to 100A can be handled by the internal diode between the input and output pins of the device. In normal operations it is difficult to get those values of surge currents even with the use of large output capacitances. If high value output capacitors are used, such as 1000mF to 5000mF and the input pin is instantaneously shorted to ground, To ensure good transient response with heavy load current changes capacitor values on the order of 100mF are used in the output of many regulators. To further improve stability and transient response of the devices larger values of output capacitor can be used.

Protection Diodes

Unlike older regulators, the LM2940IMPX-xx/NOPB family does not need any protection diodes between the adjustment pin and the output and from the output to the input to prevent over-stressing the die. Internal resistors are limiting the internal.



Table 1.

Copper Area		Board Area	Thermal Resistance (Junction-To-Ambient)
Top Side*	Back Side		
2500 Sq. mm	2500 Sq. mm	2500 Sq. mm	45°C/W
1000 Sq. mm	2500 Sq. mm	2500 Sq. mm	45°C/W
225 Sq. mm	2500 Sq. mm	2500 Sq. mm	53°C/W
100 Sq. mm	2500 Sq. mm	2500 Sq. mm	59°C/W
1000 Sq. mm	1000 Sq. mm	1000 Sq. mm	52°C/W
1000 Sq. mm	0	1000 Sq. mm	55°C/W


Ripple Rejection

The ripple rejection values are measured with the adjustment pin bypassed. The impedance of the adjust pin capacitor at the ripple frequency should be less than the value of R1 (normally 100Ω to 200Ω) for a proper bypassing and ripple rejection approaching the values shown. The size of the required adjust pin capacitor is a function of the input ripple frequency. If R1=100Ω at 120Hz the adjust pin capacitor should be >13mF. At 10kHz only 0.16mF is needed.

The ripple rejection will be a function of output voltage, in circuits without an adjust pin bypass capacitor. The output ripple will increase directly as a ratio of the output voltage to the reference voltage (V_{OUT} / V_{REF}).

Package Dimensions

Inches (millimeters) unless otherwise noted.

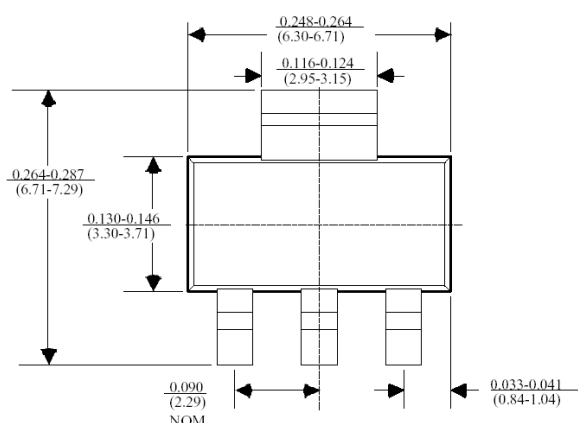



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.