


Description


The MC7805BDTRKG-CN series of three - terminal positive regulators are available in the TO-252 package with fixed output voltage making it useful in a wide range of applications.

Features

- Output Current up to 1A
- Output Voltage of 5V
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating area (SOA)Protection



Internal Block Diagram

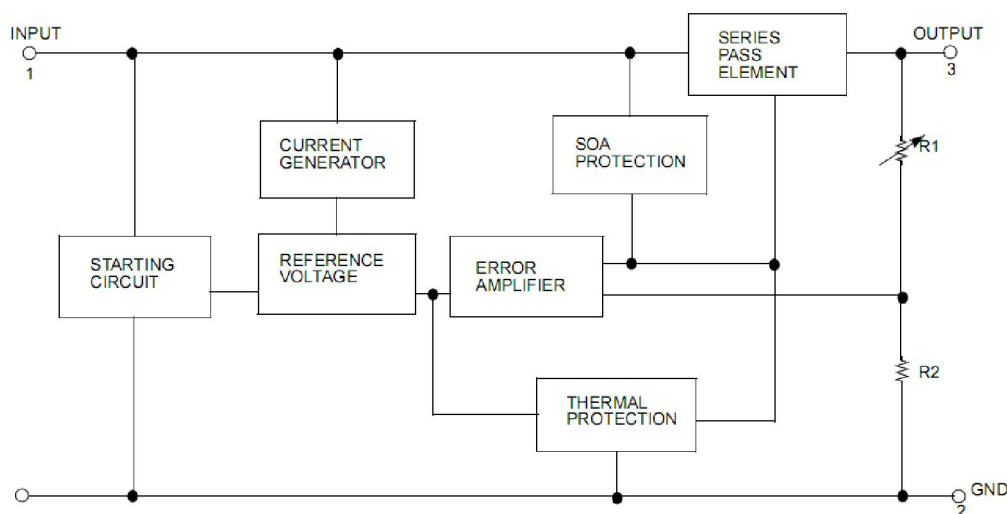

Absolute Maximum Ratings

Parameter		Symbol	Value	Unit
Input Voltage	$V_O = 5V$	V_{IN}	30	V
Thermal Resistance Junction-Air		$R_{\theta JA}$	92	$^{\circ}C/W$
Operating Temperature Range		T_{OPR}	$0 \sim +125$	$^{\circ}C$
Storage Temperature Range		T_{STG}	$-55 \sim +150$	$^{\circ}C$

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. ChipNobo does not recommend operation outside datasheet specifications.

Electrical Characteristics

($V_I = 10V$, $I_O = 0.5A$, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, $T_J = -40^\circ C$ to $125^\circ C$, unless otherwise specified)

Parameter	Symbol	Conditions		Min	Typ	Max	Unit
Output Voltage	V_O	$T_J = 25^\circ C$, $I_O = 5mA \sim 1A$		4.80	5.0	5.20	V
		$V_I = 7V \sim 20V$, $I_O = 5mA \sim 1A$		4.75	5.0	5.25	V
Line Regulation ①	ΔV_O	$T_J = 25^\circ C$	$V_I = 7V \sim 25V$			100	mV
			$V_I = 8V \sim 12V$			50	
Load Regulation ①	ΔV_O	$T_J = 25^\circ C$	$I_O = 5mA \sim 1A$			100	mV
			$I_O = 0.25A \sim 0.75A$			50	
Quiescent Current	I_Q	$T_J = 25^\circ C$				8.0	mA
Quiescent Current Change	ΔI_Q	$I_O = 5mA \sim 1A$				0.5	mA
		$V_I = 7V \sim 25V$				1.3	
Output Voltage Drift ②	$\Delta V / \Delta T$	$I_O = 5mA$			-0.8		mV/ $^\circ C$
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$			42		$\mu V/V_O$
Ripple Rejection ②	RR	$f = 120Hz$, $V_I = 8V \sim 18V$		62	73		dB
Output Resistance ②	R_O	$f = 1kHz$			15		m Ω
Short Circuit Current	I_{SC}	$T_J = 25^\circ C$, $V_I = 30V$			230		mA
Peak Out Current ②	I_{PK}	$T_J = 25^\circ C$			1.8		A
Dropout Voltage	V_d	$T_J = 25^\circ C$, $I_O = 1A$			2.0		V

Note 1: Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Note 2: These parameters, although guaranteed, are not 100% tested in production.

Typical Characteristics

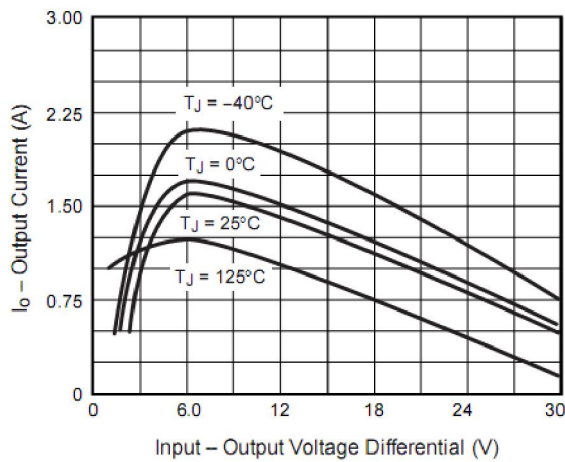


Figure 1. Peak Output Current

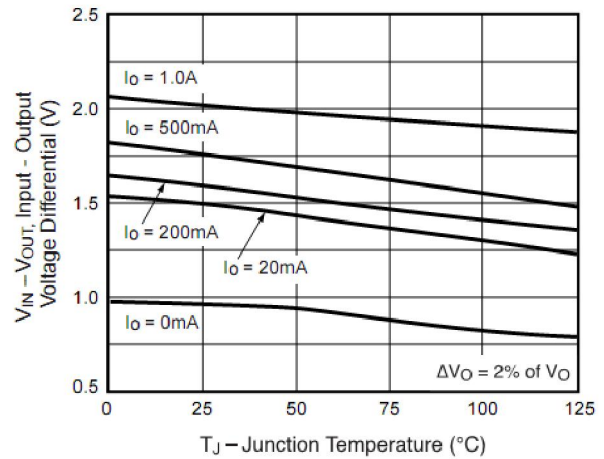


Figure 2. Dropout Voltage vs. Junction Temperature

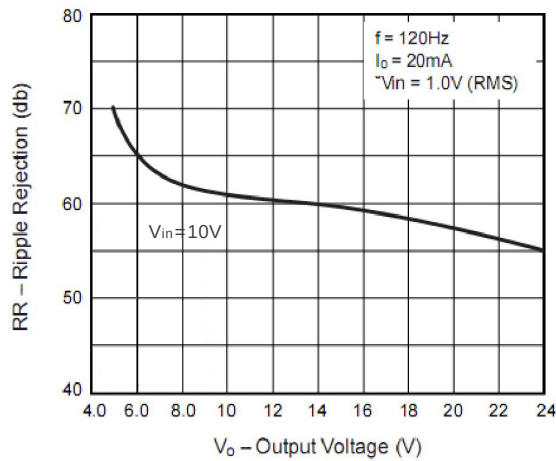


Figure 3. Ripple Rejection Ratio vs. Output Voltage

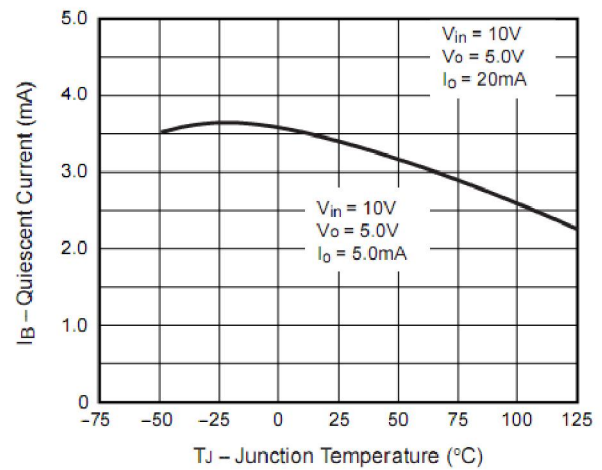


Figure 4. Quiescent Current vs. Junction Temperature

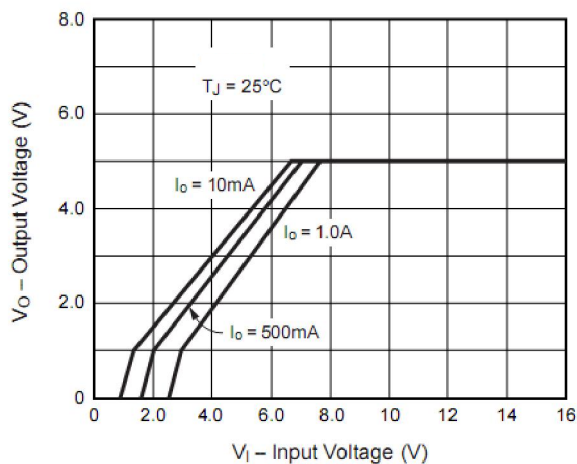


Figure 8. Output Voltage vs. Input Voltage


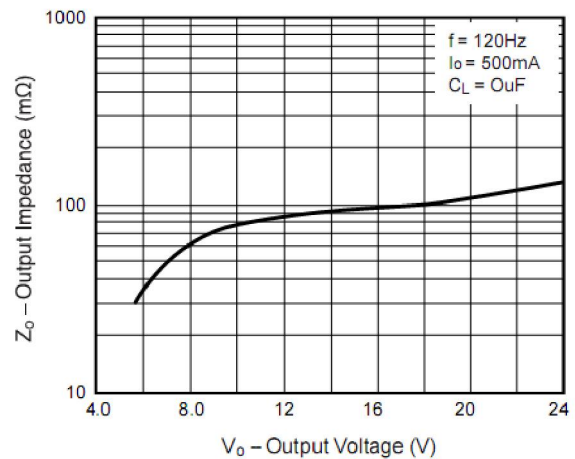


Figure 9. Output Impedance (mΩ) vs. Output Voltage

Application circuit

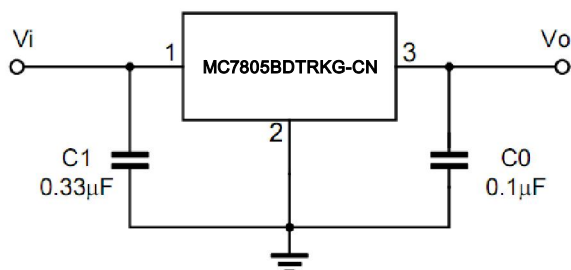

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Package Dimensions (TO-252)

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.20	2.50	0.087	0.098
A1	0.00	0.12	0.000	0.005
A2	2.20	2.40	0.087	0.094
B	1.20	1.60	0.047	0.063
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.40	0.60	0.016	0.024
c1	0.40	0.60	0.016	0.024
D	6.35	6.65	0.250	0.262
D1	5.20	5.40	0.205	0.213
E	5.40	5.70	0.213	0.224
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	9.60	10.20	0.378	0.402
L1	2.70	3.10	0.106	0.122
L2	1.40	1.80	0.055	0.071
L3	0.90	1.50	0.035	0.059

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。