



Descriptions

MAX20331AEWLT is over voltage protection IC designed to protect the audio codecs and electronics of portable devices. Connecting the MAX20331AEWLT between the 3.5mm jack and audio path electronics provides protection against high-voltage conditions to $\pm 35V$. The 9-Ball Wafer Level Chip Scale Package (CSP) 1.2mm x 1.2mm with Pb-free and Halogen-free, makes it ideal for mobile device. High Performance Pin-to-Pin Replaceable MAX20331, CSP-9(WLP-9(1.2x1.2).

Order Information

Package		Part Number	Top-Side Marking
CSP-9(WLP-9(1.2x1.2)	Tape and Reel	MAX20331AEWLT	TBD

Features

- Pin-to-Pin MAX20331AEWL, CSP-9(WLP-9(1.2x1.2)
- Wide VCC Supply Range: 2.3V~5.0V
- Protects Devices from High-Voltage Conditions: $\pm 35V$ Tolerant Inputs
- OVP Threshold: $\pm 4.1V$
- High Input/Output Swing $> 2.5V$ rms, Superior SNR $> 130dB$ A.
- Ultra-Low THD+N: -106dB, 32 Ω Load; -112dB, 600 Ω Load; -120dB, 100k Ω Load
- Audio Path Pop & Click Elimination

Applications

- 4G/5G Smart Phone, Tablets and Mobile Device with 3.5mm Audio Jack
- Bluetooth/Intelligent Speaker

Typical Application Circuit

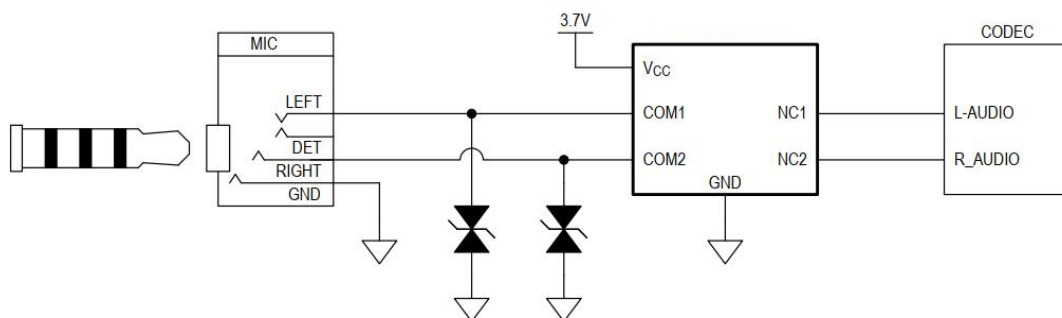


Fig.1 Typical Application Circuit



Functional Diagram

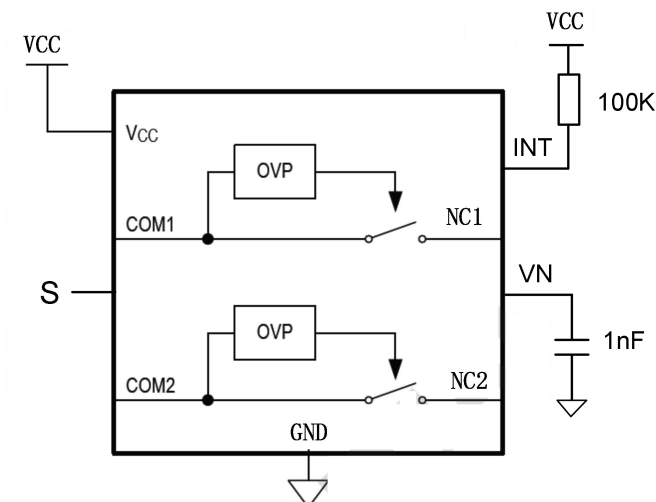


Fig.2 Functional Diagram

Pin Configuration

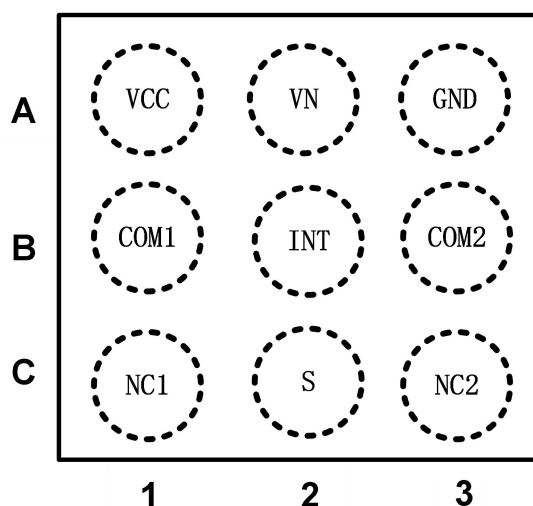


Fig.3 Top-Through View Pin Configuration

Pin Descriptions

Pin #	Name	Type	Description
A1	VCC	PWR	1.65~5.5V Positive Supply. Bypass VCC to GND 0.1uF decoupling capacitor ACAP
A2	VN	GND	1nF Capacitor Connection to GND as close as possible
A3	GND	GND	Primary Ground Connection
B1	COM1	I/O	External Audio Line 1. Connect to external audio jack
B2	INT	I/O	Open Drain Interrupt Output when COMx reach OVP threshold
B3	COM2	I/O	External Audio Line 2. Connect to external audio jack
C1	NC1	I/O	Protected Audio Line 1. Connect to internal audio codec
C2	S	I/O	GPIO control. When S is low, NCx connect to COMx; When S is high, disconnection
C3	NC2	I/O	Protected Audio Line 2. Connect to internal audio codec

Table-1 Pin Descriptions



Absolute Maximum Ratings over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		Range	Unit
Power Supply Voltage	VCC	-0.5 ~ 6.0	V
Common Ports Voltage	V _{COM}	±35	V
Internal Ports Voltage	V _{NC}	±6	V
VN Voltage	V _{VN}	-35 ~ +0.5	V
Continuous Current into Device	I _{DC}	750	mA
Storage Temperature Range	T _{STG}	-55 ~ 150	°C
ESD HBM, ANSI/ESDA/JEDEC JS-001-2012	VCC	±2	kV
	COMx	±2	kV
	Other I/O Pins	±2	kV
ESD MM, JESD22-A115	VCC	±200	V
	COMx	±2	kV
	Other I/O Pins	±2	kV

Table-2 Absolute Maximum Ratings

(1) Stresses beyond those listed in Table-2 *Absolute Maximum Ratings* may cause permanent damage to the device. They are stress ratings only, which do not imply functional operation of the device at these or any other conditions. Beyond those indicated under *Recommended Operating Conditions*, exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Recommend Operating Conditions

		Range	Unit
Power Supply Voltage	VCC	2.3 ~ 5.5	V
Common Ports Voltage	V _{COM}	±5	V
Internal Ports Voltage	V _{NC}	±3.5	V
Operating Temperature	T _A	-40 ~ 85	°C

Table-3 Recommend Operating Conditions



Electrical Characteristics (Ta=25°C, VCC=3.3V unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Supply						
Supply Voltage Range	V _{CC}		2.3	3.3	5.0	V
Supply Current	I _{CC}	S=1 disconnection		50		uA
		S=0 connnection		160		uA
Digital Input Contol						
S control input logic high	V _{IH}		1.6		5.5	V
S control input logic low	V _{IL}		-0.1		0.5	V
S Internal pull-down resistor	R _{PD}			2		MΩ
Switch On Resistance And Signal Range						
On-Resistance	R _{AUDIO}	V _{IS} = -3.0V~+3.0V I _{OUT} =30mA		0.6	1.1	Ω
R _{ON} Flatness ⁽¹⁾	R _{FLAT}	V _{IS} = -3.0V~+3.0V I _{OUT} =30mA		0.001	0.005	Ω
R _{ON} Matching Between Channels ⁽²⁾	ΔR _{ON}	V _{IS} = -3.0V~+3.0V I _{OUT} =30mA		0.02	0.05	Ω
Effective Signal Range	V _{IS}	THD+N < 0.1% @R _L =600Ω			2.5	Vrms
Switch Dynamics						
Total Harmonic Distortion	THD+N	f=10Hz to 20KHz V _{IS} =2Vrms @R _L =600Ω		-112		dB
		f=10Hz to 20kHz V _{IS} =1Vrms @RL=32Ω		-106		dB
Signal-to-Noise Ratio	SNR	f=10Hz to 20KHz, Inputs grounded @R _L =32Ω	130			dBrA
OFF Isolation	OIRR	f=10Hz to 20KHz, V _{IS} = 1Vrms @R _L =32Ω		-100		dB
Crosstalk ⁽³⁾ (Channel-to-Channel)	ACRX	f=10Hz to 20KHz, V _{IS} = 1Vrms @R _L =32Ω Source Impedance=0Ω		-100		dB
Power Supply Ripple Rejection	PSRR	f=20KHz, V _{IS} = 0.316Vrms @R _L =32Ω		-100		dB
-3dB Bandwidth	BW	@R _L =50Ω		80		MHz
Turn-on Time	t _{ON}	V _{IS} = ±100mV @R _L =32Ω S switches from High to Low		50		mS
Turn-off Time	t _{OFF}	V _{IS} = ±100mV @R _L =32Ω S switches from Low to High		15		mS
Positive Over Voltage Protection						
Positive OVP Lockout Threshold	V _{POS-OVP}	V _{COM} Rising Edge		4.1		V
Positive OVP Hysteresis	V _{POS-HYS}	V _{COM} Falling Edge		300		mV



Positive OVP Response Time	t_{FP}	$V_{COM} = 1V$ to 6 step @ $R_{NC}=1K\Omega$		0.6		μS
Positive OVP Recovery Time	t_{FPR}	$V_{COM} = 6V$ to 1 step @ $R_{NC}=1K\Omega$		130		μS
Positive OVP Leakage Current	$I_{POS-OVP}$	$V_{COM} = +35V$ @ $R_{NC}=1K\Omega$		66	90	μA
Negative Over Voltage Protection						
Negative OVP Lockout Threshold	$V_{NEG-OVP}$	V_{COM} Falling Edge		-4.1		V
Negative OVP Hysteresis	$V_{NEG-HYS}$	V_{COM} Rising Edge		600		mV
Negative OVP Response Time	t_{FN}	$V_{COM} = -1V$ to -6 step @ $R_{NC}=1K\Omega$		0.6		μS
Negative OVP Recovery Time	t_{FNR}	$V_{COM} = -6V$ to -1 step @ $R_{NC}=1K\Omega$		150		μS
Negative OVP Leakage Current	$I_{NEG-OVP}$	$V_{COM} = -35V$ @ $R_{NC}=1K\Omega$		100	140	μA
Thermal Protection						
Thermal Shutdown	T_{SHDN}			150		$^{\circ}C$
Thermal Hysteresis	T_{HYST}			20		$^{\circ}C$

Table-4 Electrical Characteristics

Note:

- (1) Flatness is defined as the difference between maximum and minimum value of ON-resistance at the specified analog signal voltage points.
- (2) R_{ON} matching between channels is calculated by subtracting the channel with the lowest max R_{on} value from the channel with the highest max R_{on} value.
- (3) Crosstalk is inversely proportional to source impedance



Package Outline Dimensions

CSP-9(WLP-9(1.2x1.2))

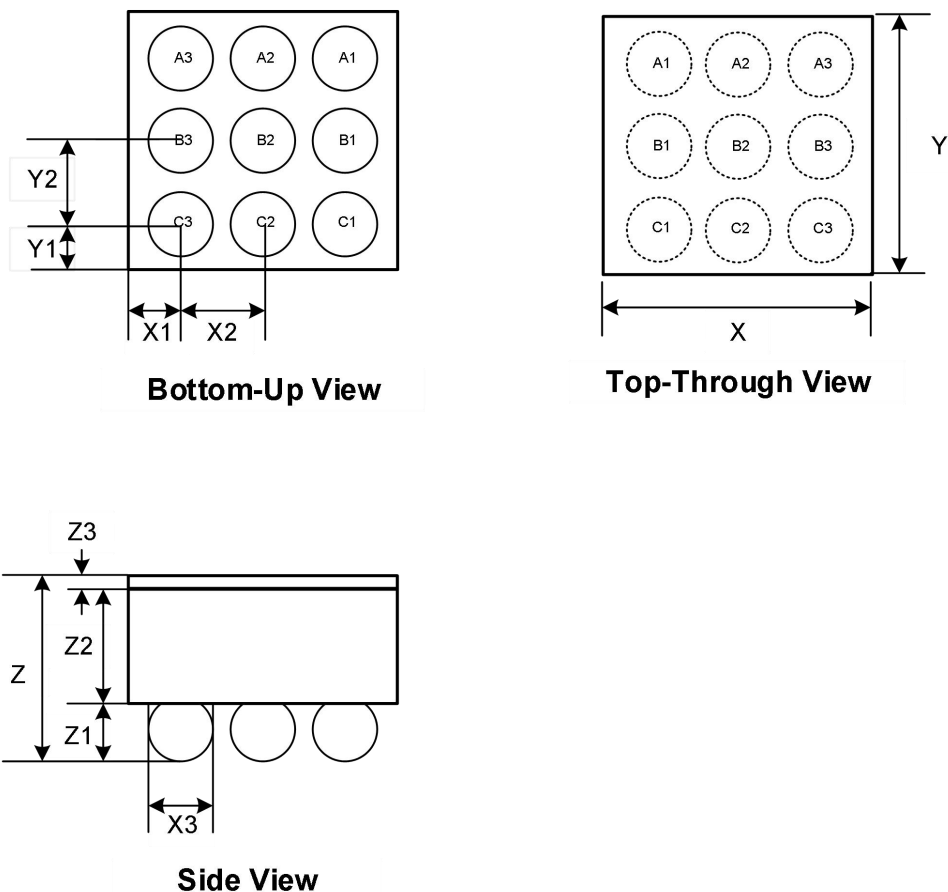


Fig.4 Package Outline Dimensions

Symbol	Dimensions In Millimeter		
	Min.	Typ.	Max.
X	1.14	1.17	1.2
Y	1.14	1.17	1.2
X1		0.18	
X2		0.40	
X3	0.21	0.23	0.25
Y1		0.18	
Y2		0.40	
Z	0.545	0.575	0.605
Z1	0.165	0.185	0.205
Z2	0.3525	0.365	0.3775
Z3	0.02	0.025	0.03



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.