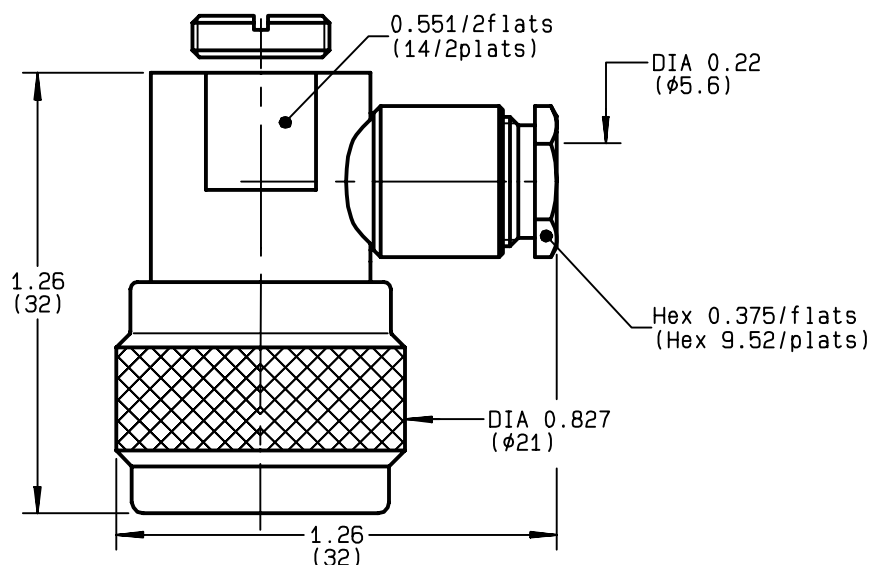


RIGHT ANGLE PLUG CLAMP TYPE
CABLE 5/50 S+D
R161.157.000
SERIES N


NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-11	GHz
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$
V.S.W.R	1.50 +	x F(GHz)Maxi
RF INSERTION LOSS	0.07	$\sqrt{F}(\text{GHz})$ dB Maxi
VOLTAGE RATING	850	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	1500	Veff Mini
INSULATION RESISTANCE	5000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT	80	gr
SPECIFICATION		

CABLES : **KX 15**
KX 23
RG 141
RG 142
RG 142 FTX
RG 223
RG 400
RG 58

OTHERS CHARACTERISTICS

CABLE RETENTION	150	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	27	N Mini
Axial force - opposite end	27	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	130	cm.N
Panel nut	NA	cm.N
Clamp nut	150	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY	BRASS	BBR 2	
OUTER CONTACT	BRASS	BBR 2	
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET	SILICONE RUBBER	-	
OTHERS PIECES	BRASS	BBR 2	

BONOMINI

ISSUE
9812J01
CREATION DATE
30/06/1993
FILE PART-NUMBER
EPC 96-07

RADIALL®


The information given here is subject to change without notice.
 Design changes may be in order to improve the product .

Connect to the future



R161.157.000


ISSUE **9812J01** SERIES **N**

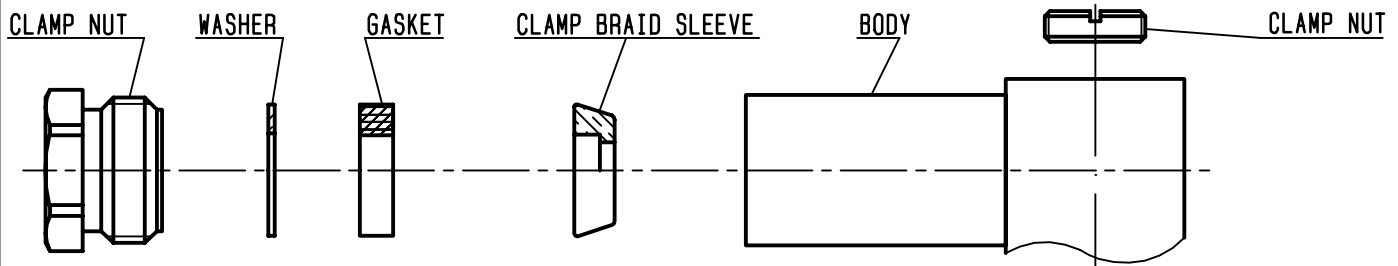

①

Strip the cable .

-
-
-
-



Stripping	a	b	c	d	e
inch	0.138	0.453	0	0	0.276
mm	3.5	11.5			7


②

Slide the clamp nut , the washer and the gasket onto the cable .

Slide clamp braid sleeve over braid .

Fold back braid and trim off surplus braid .

Trim back dielectric as shown .

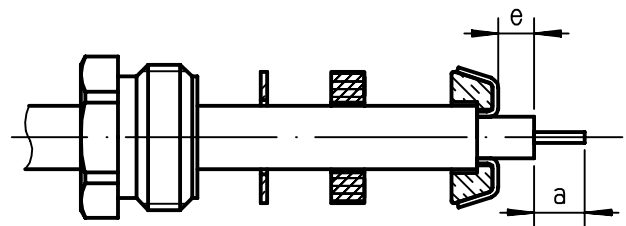


③

Screw sub-assembly into the connector body .

(recommended coupling torque 13.27 in.lb)

-

Solder center contact .

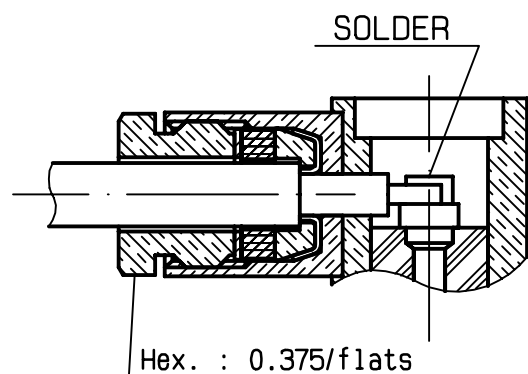

④

Screw clamp nut into the body .

-
-
-
-

