


**Features:**

- ◆ True Dual-Port memory cells which allow simultaneous access of the same memory location
- ◆ High-speed data access
  - Commercial: 3.6ns (166MHz)/4.2ns (133MHz) (max.)
  - Industrial: 4.2ns (133MHz) (max.)
- ◆ Selectable Pipelined or Flow-Through output mode
- ◆ Counter enable and repeat features
- ◆ Dual chip enables allow for depth expansion without additional logic
- ◆ Full synchronous operation on both ports
  - 6ns cycle time, 166MHz operation (12Gbps bandwidth)
  - Fast 3.6ns clock to data out
  - 1.7ns setup to clock and 0.5ns hold on all control, data, and address inputs @ 166MHz
  - Data input, address, byte enable and control registers
  - Self-timed write allows fast cycle time

- ◆ Separate byte controls for multiplexed bus and bus matching compatibility
- ◆ Dual Cycle Deselect (DCD) for Pipelined Output mode
- ◆ LVTTTL-compatible, 3.3V (±150mV) power supply for core
- ◆ LVTTTL compatible, selectable 3.3V (±150mV) or 2.5V (±100mV) power supply for I/Os and control signals on each port
- ◆ Industrial temperature range (-40°C to +85°C) is available at 133MHz.
- ◆ Available in a 208-pin Plastic Quad Flatpack (PQFP), 208-pin fine pitch Ball Grid Array (fpBGA), and 256-pin Ball Grid Array (BGA)
- ◆ Supports JTAG features compliant with IEEE 1149.1
- ◆ Green parts available, see ordering information

**Functional Block Diagram**

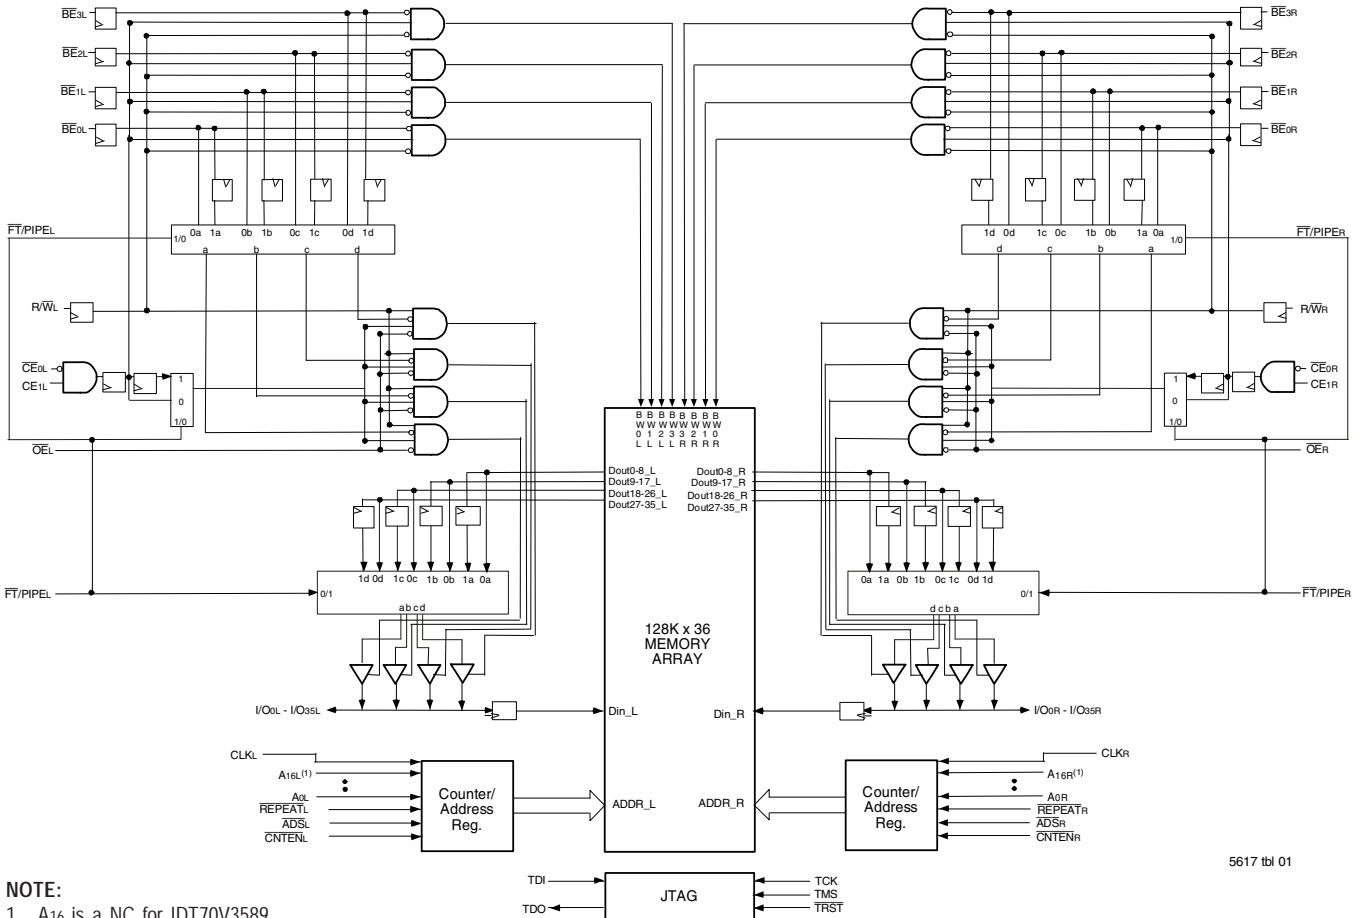

**NOTE:**  
1. A16 is a NC for IDT70V3589.

5617 tbl 01

## Description:

The IDT70V3599/89 is a high-speed 128/64K x 36 bit synchronous Dual-Port RAM. The memory array utilizes Dual-Port memory cells to allow simultaneous access of any address from both ports. Registers on control, data, and address inputs provide minimal setup and hold times. The timing latitude provided by this approach allows systems to be designed with very short cycle times. With an input data register, the IDT70V3599/89 has been optimized for applications having unidirectional

or bidirectional data flow in bursts. An automatic power down feature, controlled by CE<sub>0</sub> and CE<sub>1</sub>, permits the on-chip circuitry of each port to enter a very low standby power mode.

The 70V3599/89 can support an operating voltage of either 3.3V or 2.5V on one or both ports, controllable by the OPT pins. The power supply for the core of the device (V<sub>DD</sub>) remains at 3.3V.

## Pin Configuration<sup>(1,2,3,4,5)</sup>

|              |              |                            |                            |   |                           |            |                            |                            |                         |                             |                            |               |                           |               |               |                            |
|--------------|--------------|----------------------------|----------------------------|---|---------------------------|------------|----------------------------|----------------------------|-------------------------|-----------------------------|----------------------------|---------------|---------------------------|---------------|---------------|----------------------------|
| A1<br>IO19L  | A2<br>IO18L  | A3<br>VSS                  | A4<br>TDO                  | A5<br>NC  | A6<br>A16L <sup>(1)</sup> | A7<br>A12L | A8<br>A8L                  | A9<br>$\overline{BE}_{1L}$ | A10<br>VDD              | A11<br>CLKL                 | A12<br>$\overline{CNTENL}$ | A13<br>A4L    | A14<br>A0L                | A15<br>OPTL   | A16<br>I/O17L | A17<br>VSS                 |
| B1<br>I/O20R | B2<br>VSS    | B3<br>I/O18R               | B4<br>TDI                  | B5<br>NC  | B6<br>A13L                | B7<br>A9L  | B8<br>$\overline{BE}_{2L}$ | B9<br>$\overline{CE}_{0L}$ | B10<br>VSS              | B11<br>$\overline{ADSL}$    | B12<br>A5L                 | B13<br>A1L    | B14<br>VSS                | B15<br>VDDQR  | B16<br>I/O16L | B17<br>I/O15R              |
| C1<br>VDDQL  | C2<br>I/O19R | C3<br>VDDQR                | C4<br>PL/ $\overline{FTL}$ | C5<br>NC  | C6<br>A14L                | C7<br>A10L | C8<br>$\overline{BE}_{3L}$ | C9<br>CE1L                 | C10<br>VSS              | C11<br>R/ $\overline{WL}$   | C12<br>A6L                 | C13<br>A2L    | C14<br>VDD                | C15<br>I/O16R | C16<br>I/O15L | C17<br>VSS                 |
| D1<br>I/O22L | D2<br>VSS    | D3<br>I/O21L               | D4<br>I/O20L               | D5<br>A15L  | D6<br>A11L                | D7<br>A7L  | D8<br>$\overline{BE}_{0L}$ | D9<br>VDD                  | D10<br>$\overline{OEL}$ | D11<br>$\overline{REPEATL}$ | D12<br>A3L                 | D13<br>VDD    | D14<br>I/O17R             | D15<br>VDDQL  | D16<br>I/O14L | D17<br>I/O14R              |
| E1<br>I/O23L | E2<br>I/O22R | E3<br>VDDQR                | E4<br>I/O21R               | <b>70V3599/89</b><br><b>BF208<sup>(6)</sup></b><br><b>BFG208<sup>(6)</sup></b><br><br><b>208-Pin fpBGA</b><br><b>Top View<sup>(7)</sup></b> |                           |            |                            |                            |                         |                             |                            | E14<br>I/O12L | E15<br>I/O13R             | E16<br>VSS    | E17<br>I/O13L |                            |
| F1<br>VDDQL  | F2<br>I/O23R | F3<br>I/O24L               | F4<br>VSS                  |   |                           |            |                            |                            |                         |                             |                            | F14<br>VSS    | F15<br>I/O12R             | F16<br>I/O11L | F17<br>VDDQR  |                            |
| G1<br>I/O26L | G2<br>VSS    | G3<br>I/O25L               | G4<br>I/O24R               |   |                           |            |                            |                            |                         |                             |                            | G14<br>I/O9L  | G15<br>VDDQL              | G16<br>I/O10L | G17<br>I/O11R |                            |
| H1<br>VDD    | H2<br>I/O26R | H3<br>VDDQR                | H4<br>I/O25R               |   |                           |            |                            |                            |                         |                             |                            | H14<br>VDD    | H15<br>I/O9R              | H16<br>VSS    | H17<br>I/O10R |                            |
| J1<br>VDDQ   | J2<br>VDD    | J3<br>VSS                  | J4<br>VSS                  |   |                           |            |                            |                            |                         |                             |                            | J14<br>VSS    | J15<br>VDD                | J16<br>VSS    | J17<br>VDDQR  |                            |
| K1<br>I/O28R | K2<br>VSS    | K3<br>I/O27R               | K4<br>VSS                  |   |                           |            |                            |                            |                         |                             |                            | K14<br>I/O7R  | K15<br>VDDQ               | K16<br>I/O8R  | K17<br>VSS    |                            |
| L1<br>I/O29R | L2<br>I/O28L | L3<br>VDDQR                | L4<br>I/O27L               |   |                           |            |                            |                            |                         |                             |                            | L14<br>I/O6R  | L15<br>I/O7L              | L16<br>VSS    | L17<br>I/O8L  |                            |
| M1<br>VDDQL  | M2<br>I/O29L | M3<br>I/O30R               | M4<br>VSS                  |   |                           |            |                            |                            |                         |                             |                            | M14<br>VSS    | M15<br>I/O6L              | M16<br>I/O5R  | M17<br>VDDQR  |                            |
| N1<br>I/O31L | N2<br>VSS    | N3<br>I/O31R               | N4<br>I/O30L               |   |                           |            |                            |                            |                         |                             |                            | N14<br>I/O3R  | N15<br>VDDQL              | N16<br>I/O4R  | N17<br>I/O5L  |                            |
| P1<br>I/O32R | P2<br>I/O32L | P3<br>VDDQR                | P4<br>I/O35R               |   |                           |            |                            |                            |                         |                             |                            | P5<br>TRST    | P6<br>A16R <sup>(1)</sup> | P7<br>A12R    | P8<br>A8R     | P9<br>$\overline{BE}_{1R}$ |
| R1<br>VSS    | R2<br>I/O33L | R3<br>I/O34R               | R4<br>TCK                  | R5<br>NC  | R6<br>A13R                | R7<br>A9R  | R8<br>$\overline{BE}_{2R}$ | R9<br>$\overline{CE}_{0R}$ | R10<br>VSS              | R11<br>$\overline{ADSR}$    | R12<br>A5R                 | R13<br>A1R    | R14<br>VSS                | R15<br>VDDQL  | R16<br>I/O1R  | R17<br>VDDQR               |
| T1<br>I/O33R | T2<br>I/O34L | T3<br>VDDQL                | T4<br>TMS                  | T5<br>NC  | T6<br>A14R                | T7<br>A10R | T8<br>$\overline{BE}_{3R}$ | T9<br>CE1R                 | T10<br>VSS              | T11<br>R/ $\overline{WR}$   | T12<br>A6R                 | T13<br>A2R    | T14<br>VSS                | T15<br>I/O0R  | T16<br>VSS    | T17<br>I/O2R               |
| U1<br>VSS    | U2<br>I/O35L | U3<br>PL/ $\overline{FTR}$ | U4<br>NC                   | U5<br>A15R  | U6<br>A11R                | U7<br>A7R  | U8<br>$\overline{BE}_{0R}$ | U9<br>VDD                  | U10<br>$\overline{OER}$ | U11<br>$\overline{REPEATR}$ | U12<br>A3R                 | U13<br>A0R    | U14<br>VDD                | U15<br>OPTR   | U16<br>I/O0L  | U17<br>I/O1L               |

### NOTES:

5617 drw 02c

1. A<sub>16</sub> is a NC for IDT70V3589.
2. All V<sub>DD</sub> pins must be connected to 3.3V power supply.
3. All V<sub>DDQ</sub> pins must be connected to appropriate power supply: 3.3V if OPT pin for that port is set to V<sub>IH</sub> (3.3V), and 2.5V if OPT pin for that port is set to V<sub>IL</sub> (0V).
4. All V<sub>SS</sub> pins must be connected to ground supply.
5. Package body is approximately 15mm x 15mm x 1.4mm with 0.8mm ball pitch.
6. This package code is used to reference the package diagram.
7. This text does not indicate orientation of the actual part-marking.

Pin Configuration<sup>(1,2,3,4,5)</sup> (con't.)

70V3599/89

BC256<sup>(6)</sup>BCG256<sup>(6)</sup>

256-Pin BGA

Top View<sup>(7)</sup>


|        |        |        |                     |       |       |       |                      |                      |                    |                       |       |       |        |        |        |
|--------|--------|--------|---------------------|-------|-------|-------|----------------------|----------------------|--------------------|-----------------------|-------|-------|--------|--------|--------|
| A1     | A2     | A3     | A4                  | A5    | A6    | A7    | A8                   | A9                   | A10                | A11                   | A12   | A13   | A14    | A15    | A16    |
| NC     | TDI    | NC     | NC                  | A14L  | A11L  | A8L   | $\overline{BE}_{2L}$ | CE1L                 | $\overline{OE}_L$  | $\overline{CNTEN}_L$  | A5L   | A2L   | A0L    | NC     | NC     |
| B1     | B2     | B3     | B4                  | B5    | B6    | B7    | B8                   | B9                   | B10                | B11                   | B12   | B13   | B14    | B15    | B16    |
| I/O18L | NC     | TDO    | NC                  | A15L  | A12L  | A9L   | $\overline{BE}_{3L}$ | $\overline{CE}_{0L}$ | R/W $\overline{L}$ | $\overline{REPEAT}_L$ | A4L   | A1L   | VDD    | I/O17L | NC     |
| C1     | C2     | C3     | C4                  | C5    | C6    | C7    | C8                   | C9                   | C10                | C11                   | C12   | C13   | C14    | C15    | C16    |
| I/O18R | I/O19L | VSS    | A16L <sup>(1)</sup> | A13L  | A10L  | A7L   | $\overline{BE}_{1L}$ | $\overline{BE}_{0L}$ | CLKL               | $\overline{ADS}_L$    | A6L   | A3L   | OPTL   | I/O17R | I/O16L |
| D1     | D2     | D3     | D4                  | D5    | D6    | D7    | D8                   | D9                   | D10                | D11                   | D12   | D13   | D14    | D15    | D16    |
| I/O20R | I/O19R | I/O20L | PIPE/FTL            | VDDQL | VDDQL | VDDQR | VDDQR                | VDDQL                | VDDQL              | VDDQR                 | VDDQR | VDD   | I/O15R | I/O15L | I/O16R |
| E1     | E2     | E3     | E4                  | E5    | E6    | E7    | E8                   | E9                   | E10                | E11                   | E12   | E13   | E14    | E15    | E16    |
| I/O21R | I/O21L | I/O22L | VDDQL               | VDD   | VDD   | VSS   | VSS                  | VSS                  | VSS                | VDD                   | VDD   | VDDQR | I/O13L | I/O14L | I/O14R |
| F1     | F2     | F3     | F4                  | F5    | F6    | F7    | F8                   | F9                   | F10                | F11                   | F12   | F13   | F14    | F15    | F16    |
| I/O23L | I/O22R | I/O23R | VDDQL               | VDD   | VSS   | VSS   | VSS                  | VSS                  | VSS                | VSS                   | VDD   | VDDQR | I/O12R | I/O13R | I/O12L |
| G1     | G2     | G3     | G4                  | G5    | G6    | G7    | G8                   | G9                   | G10                | G11                   | G12   | G13   | G14    | G15    | G16    |
| I/O24R | I/O24L | I/O25L | VDDQR               | VSS   | VSS   | VSS   | VSS                  | VSS                  | VSS                | VSS                   | VSS   | VDDQL | I/O10L | I/O11L | I/O11R |
| H1     | H2     | H3     | H4                  | H5    | H6    | H7    | H8                   | H9                   | H10                | H11                   | H12   | H13   | H14    | H15    | H16    |
| I/O26L | I/O25R | I/O26R | VDDQR               | VSS   | VSS   | VSS   | VSS                  | VSS                  | VSS                | VSS                   | VSS   | VDDQL | I/O9R  | I/O9L  | I/O10R |
| J1     | J2     | J3     | J4                  | J5    | J6    | J7    | J8                   | J9                   | J10                | J11                   | J12   | J13   | J14    | J15    | J16    |
| I/O27L | I/O28R | I/O27R | VDDQL               | VSS   | VSS   | VSS   | VSS                  | VSS                  | VSS                | VSS                   | VSS   | VDDQR | I/O8R  | I/O7R  | I/O8L  |
| K1     | K2     | K3     | K4                  | K5    | K6    | K7    | K8                   | K9                   | K10                | K11                   | K12   | K13   | K14    | K15    | K16    |
| I/O29R | I/O29L | I/O28L | VDDQL               | VSS   | VSS   | VSS   | VSS                  | VSS                  | VSS                | VSS                   | VSS   | VDDQR | I/O6R  | I/O6L  | I/O7L  |
| L1     | L2     | L3     | L4                  | L5    | L6    | L7    | L8                   | L9                   | L10                | L11                   | L12   | L13   | L14    | L15    | L16    |
| I/O30L | I/O31R | I/O30R | VDDQR               | VDD   | VSS   | VSS   | VSS                  | VSS                  | VSS                | VSS                   | VDD   | VDDQL | I/O5L  | I/O4R  | I/O5R  |
| M1     | M2     | M3     | M4                  | M5    | M6    | M7    | M8                   | M9                   | M10                | M11                   | M12   | M13   | M14    | M15    | M16    |
| I/O32R | I/O32L | I/O31L | VDDQR               | VDD   | VDD   | VSS   | VSS                  | VSS                  | VSS                | VDD                   | VDD   | VDDQL | I/O3R  | I/O3L  | I/O4L  |
| N1     | N2     | N3     | N4                  | N5    | N6    | N7    | N8                   | N9                   | N10                | N11                   | N12   | N13   | N14    | N15    | N16    |
| I/O33L | I/O34R | I/O33R | PIPE/FTR            | VDDQR | VDDQR | VDDQL | VDDQL                | VDDQR                | VDDQR              | VDDQL                 | VDDQL | VDD   | I/O2L  | I/O1R  | I/O2R  |
| P1     | P2     | P3     | P4                  | P5    | P6    | P7    | P8                   | P9                   | P10                | P11                   | P12   | P13   | P14    | P15    | P16    |
| I/O35R | I/O34L | TMS    | A16R <sup>(1)</sup> | A13R  | A10R  | A7R   | $\overline{BE}_{1R}$ | $\overline{BE}_{0R}$ | CLKR               | $\overline{ADS}_R$    | A6R   | A3R   | I/O0L  | I/O0R  | I/O1L  |
| R1     | R2     | R3     | R4                  | R5    | R6    | R7    | R8                   | R9                   | R10                | R11                   | R12   | R13   | R14    | R15    | R16    |
| I/O35L | NC     | TRST   | NC                  | A15R  | A12R  | A9R   | $\overline{BE}_{3R}$ | $\overline{CE}_{0R}$ | R/W $\overline{R}$ | $\overline{REPEAT}_R$ | A4R   | A1R   | OPTR   | NC     | NC     |
| T1     | T2     | T3     | T4                  | T5    | T6    | T7    | T8                   | T9                   | T10                | T11                   | T12   | T13   | T14    | T15    | T16    |
| NC     | TCK    | NC     | NC                  | A14R  | A11R  | A8R   | $\overline{BE}_{2R}$ | CE1R                 | $\overline{OE}_R$  | $\overline{CNTEN}_R$  | A5R   | A2R   | A0R    | NC     | NC     |

5617 drw 02d

## NOTES:

1. A16 is a NC for IDT70V3589.
2. All VDD pins must be connected to 3.3V power supply.
3. All VDDQ pins must be connected to appropriate power supply: 3.3V if OPT pin for that port is set to VIH (3.3V), and 2.5V if OPT pin for that port is set to VIL (0V).
4. All VSS pins must be connected to ground supply.
5. Package body is approximately 17mm x 17mm x 1.4mm, with 1.0mm ball-pitch.
6. This package code is used to reference the package diagram.
7. This text does not indicate orientation of the actual part-marking.

### Pin Configuration<sup>(1,2,3,4,5)</sup> (con't.)

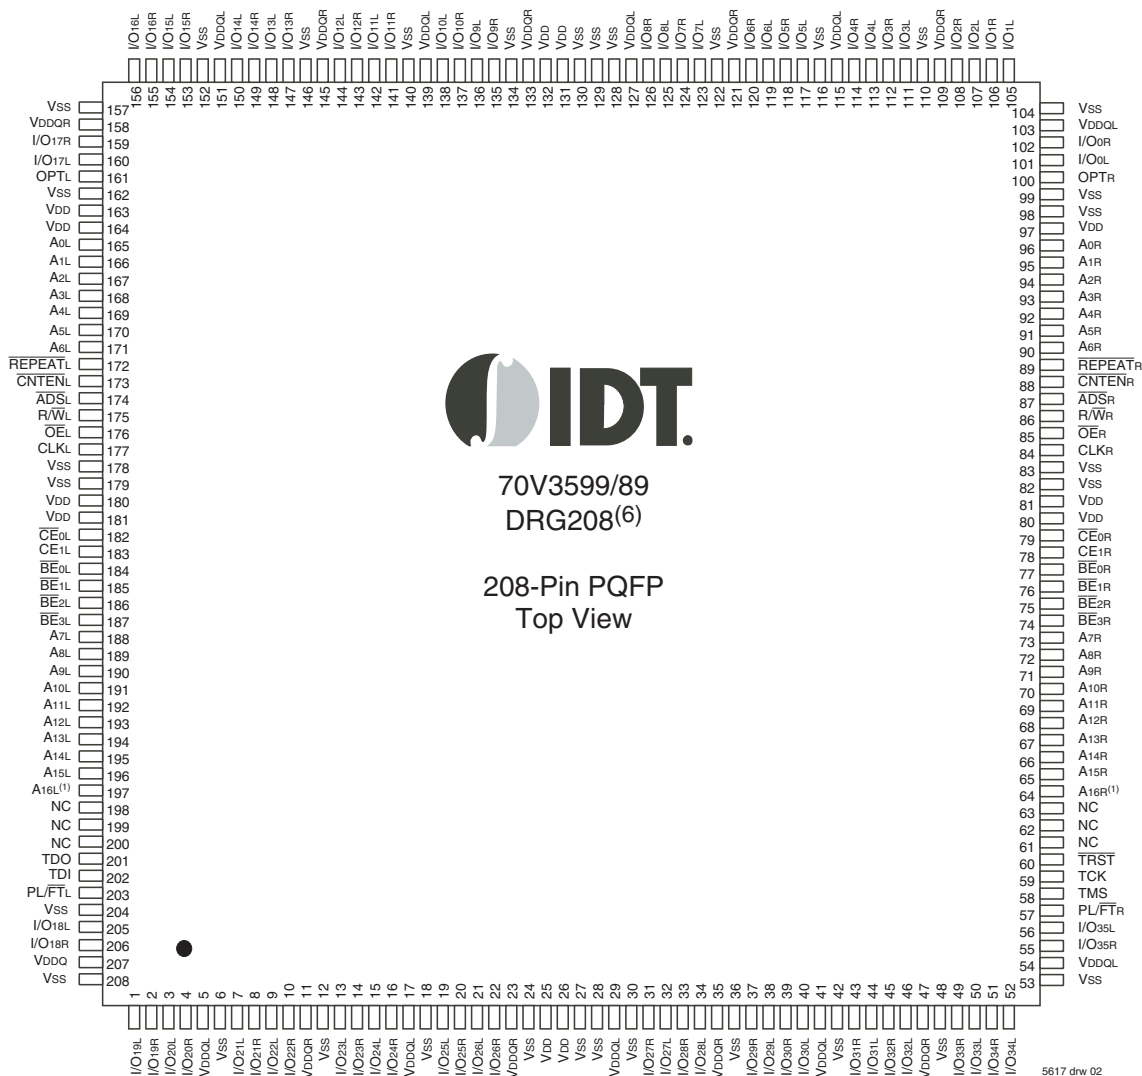

**NOTES:**

1. A16 is a NC for IDT70V3589.
2. All V<sub>DD</sub> pins must be connected to 3.3V power supply.
3. All V<sub>DDO</sub> pins must be connected to appropriate power supply: 3.3V if OPT pin for that port is set to V<sub>IH</sub> (3.3V), and 2.5V if OPT pin for that port is set to V<sub>IL</sub> (0V).
4. All V<sub>SS</sub> pins must be connected to ground supply.
5. Package body is approximately 28mm x 28mm x 3.5mm.
6. This package code is used to reference the package diagram.

## Pin Names

| Left Port                                   | Right Port                                  | Names  |
|---|---|--|
| $\overline{CE}_{0L}$ , $CE_{1L}$            | $\overline{CE}_{0R}$ , $CE_{1R}$            | Chip Enables <sup>(5)</sup>                      |
| $R/\overline{WL}$                           | $R/\overline{WR}$                           | Read/Write Enable                                |
| $\overline{OE}_L$                           | $\overline{OE}_R$                           | Output Enable                                    |
| $A_{0L}$ - $A_{16L}$ <sup>(1)</sup>         | $A_{0R}$ - $A_{16R}$ <sup>(1)</sup>         | Address  |
| $I/O_{0L}$ - $I/O_{35L}$                    | $I/O_{0R}$ - $I/O_{35R}$                    | Data Input/Output                                |
| $CLK_L$                                     | $CLK_R$                                     | Clock  |
| $PL/\overline{FT}_L$                        | $PL/\overline{FT}_R$                        | Pipeline/Flow-Through                            |
| $\overline{ADS}_L$                          | $\overline{ADS}_R$                          | Address Strobe Enable                            |
| $\overline{CNTEN}_L$                        | $\overline{CNTEN}_R$                        | Counter Enable                                   |
| $\overline{REPEAT}_L$                       | $\overline{REPEAT}_R$                       | Counter Repeat <sup>(4)</sup>                    |
| $\overline{BE}_{0L}$ - $\overline{BE}_{3L}$ | $\overline{BE}_{0R}$ - $\overline{BE}_{3R}$ | Byte Enables (9-bit bytes) <sup>(5)</sup>        |
| $V_{DD0L}$                                  | $V_{DD0R}$                                  | Power (I/O Bus) (3.3V or 2.5V) <sup>(2)</sup>    |
| $OPT_L$                                     | $OPT_R$                                     | Option for selecting $V_{DD0x}$ <sup>(2,3)</sup> |
| $V_{DD}$                                    |   | Power (3.3V) <sup>(2)</sup>                      |
| $V_{SS}$                                    |   | Ground (0V)                                      |
| $TDI$                                       |   | Test Data Input                                  |
| $TDO$                                       |   | Test Data Output                                 |
| $TCK$                                       |   | Test Logic Clock (10MHz)                         |
| $TMS$                                       |   | Test Mode Select                                 |
| $\overline{TRST}$                           |   | Reset (Initialize TAP Controller)                |

5617 tbl 01

## NOTES:

1. A16 is a NC for IDT70V3589.
2.  $V_{DD}$ ,  $OPT_x$ , and  $V_{DD0x}$  must be set to appropriate operating levels prior to applying inputs on the I/Os and controls for that port.
3.  $OPT_x$  selects the operating voltage levels for the I/Os and controls on that port. If  $OPT_x$  is set to  $V_{IH}$  (3.3V), then that port's I/Os and controls will operate at 3.3V levels and  $V_{DD0x}$  must be supplied at 3.3V. If  $OPT_x$  is set to  $V_{IL}$  (0V), then that port's I/Os and address controls will operate at 2.5V levels and  $V_{DD0x}$  must be supplied at 2.5V. The  $OPT$  pins are independent of one another—both ports can operate at 3.3V levels, both can operate at 2.5V levels, or either can operate at 3.3V with the other at 2.5V.
4. When  $\overline{REPEAT}_x$  is asserted, the counter will reset to the last valid address loaded via  $\overline{ADS}_x$ .
5. Chip Enables and Byte Enables are double buffered when  $PL/\overline{FT} = V_{IH}$ , i.e., the signals take two cycles to deselect.

Truth Table I—Read/Write and Enable Control<sup>(1,2,3,4)</sup>

| $\overline{OE}$ | CLK | $\overline{CE}_0$ | CE <sub>1</sub> | $\overline{BE}_3$ | $\overline{BE}_2$ | $\overline{BE}_1$ | $\overline{BE}_0$ | R/ $\overline{W}$ | Byte 3<br>I/O <sub>27:35</sub> | Byte 2<br>I/O <sub>18:26</sub> | Byte 1<br>I/O <sub>9:17</sub> | Byte 0<br>I/O <sub>0:8</sub> | MODE                        |
|-----------------|-----|-------------------|-----------------|-------------------|-------------------|-------------------|-------------------|-------------------|--------------------------------|--------------------------------|-------------------------------|------------------------------|-----------------------------|
| X               | ↑   | H                 | X               | X                 | X                 | X                 | X                 | X                 | High-Z                         | High-Z                         | High-Z                        | High-Z                       | Deselected—Power Down       |
| X               | ↑   | X                 | L               | X                 | X                 | X                 | X                 | X                 | High-Z                         | High-Z                         | High-Z                        | High-Z                       | Deselected—Power Down       |
| X               | ↑   | L                 | H               | H                 | H                 | H                 | H                 | X                 | High-Z                         | High-Z                         | High-Z                        | High-Z                       | All Bytes Deselected        |
| X               | ↑   | L                 | H               | H                 | H                 | H                 | L                 | L                 | High-Z                         | High-Z                         | High-Z                        | D <sub>IN</sub>              | Write to Byte 0 Only        |
| X               | ↑   | L                 | H               | H                 | H                 | L                 | H                 | L                 | High-Z                         | High-Z                         | D <sub>IN</sub>               | High-Z                       | Write to Byte 1 Only        |
| X               | ↑   | L                 | H               | H                 | L                 | H                 | H                 | L                 | High-Z                         | D <sub>IN</sub>                | High-Z                        | High-Z                       | Write to Byte 2 Only        |
| X               | ↑   | L                 | H               | L                 | H                 | H                 | H                 | L                 | D <sub>IN</sub>                | High-Z                         | High-Z                        | High-Z                       | Write to Byte 3 Only        |
| X               | ↑   | L                 | H               | H                 | H                 | L                 | L                 | L                 | High-Z                         | High-Z                         | D <sub>IN</sub>               | D <sub>IN</sub>              | Write to Lower 2 Bytes Only |
| X               | ↑   | L                 | H               | L                 | L                 | H                 | H                 | L                 | D <sub>IN</sub>                | D <sub>IN</sub>                | High-Z                        | High-Z                       | Write to Upper 2 bytes Only |
| X               | ↑   | L                 | H               | L                 | L                 | L                 | L                 | L                 | D <sub>IN</sub>                | D <sub>IN</sub>                | D <sub>IN</sub>               | D <sub>IN</sub>              | Write to All Bytes          |
| L               | ↑   | L                 | H               | H                 | H                 | H                 | L                 | H                 | High-Z                         | High-Z                         | High-Z                        | D <sub>OUT</sub>             | Read Byte 0 Only            |
| L               | ↑   | L                 | H               | H                 | H                 | L                 | H                 | H                 | High-Z                         | High-Z                         | D <sub>OUT</sub>              | High-Z                       | Read Byte 1 Only            |
| L               | ↑   | L                 | H               | H                 | L                 | H                 | H                 | H                 | High-Z                         | D <sub>OUT</sub>               | High-Z                        | High-Z                       | Read Byte 2 Only            |
| L               | ↑   | L                 | H               | L                 | H                 | H                 | H                 | H                 | D <sub>OUT</sub>               | High-Z                         | High-Z                        | High-Z                       | Read Byte 3 Only            |
| L               | ↑   | L                 | H               | H                 | H                 | L                 | L                 | H                 | High-Z                         | High-Z                         | D <sub>OUT</sub>              | D <sub>OUT</sub>             | Read Lower 2 Bytes Only     |
| L               | ↑   | L                 | H               | L                 | L                 | H                 | H                 | H                 | D <sub>OUT</sub>               | D <sub>OUT</sub>               | High-Z                        | High-Z                       | Read Upper 2 Bytes Only     |
| L               | ↑   | L                 | H               | L                 | L                 | L                 | L                 | H                 | D <sub>OUT</sub>               | D <sub>OUT</sub>               | D <sub>OUT</sub>              | D <sub>OUT</sub>             | Read All Bytes              |
| H               | ↑   | L                 | H               | L                 | L                 | L                 | L                 | X                 | High-Z                         | High-Z                         | High-Z                        | High-Z                       | Outputs Disabled            |

## NOTES:

- "H" = V<sub>IH</sub>, "L" = V<sub>IL</sub>, "X" = Don't Care.
- $\overline{ADS}$ ,  $\overline{CNTEN}$ ,  $\overline{REPEAT}$  = X.
- $\overline{OE}$  is an asynchronous input signal.
- It is possible to read or write any combination of bytes during a given access. A few representative samples have been illustrated here.

5617 tbl 02

Truth Table II—Address Counter Control<sup>(1,2)</sup>

| External Address | Previous Internal Address | Internal Address Used | CLK | $\overline{ADS}$ | $\overline{CNTEN}$ | $\overline{REPEAT}^{(6)}$ | I/O <sup>(3)</sup>   | MODE  |
|------------------|---------------------------|-----------------------|-----|------------------|--------------------|---------------------------|----------------------|---|
| X                | X                         | A <sub>n</sub>        | ↑   | X                | X                  | L <sup>(4)</sup>          | D <sub>VO(0)</sub>   | Counter Reset to last valid $\overline{ADS}$ load                 |
| A <sub>n</sub>   | X                         | A <sub>n</sub>        | ↑   | L <sup>(4)</sup> | X                  | H                         | D <sub>VO(n)</sub>   | External Address Used   |
| A <sub>n</sub>   | A <sub>p</sub>            | A <sub>p</sub>        | ↑   | H                | H                  | H                         | D <sub>VO(p)</sub>   | External Address Blocked—Counter disabled (A <sub>p</sub> reused) |
| X                | A <sub>p</sub>            | A <sub>p</sub> + 1    | ↑   | H                | L <sup>(5)</sup>   | H                         | D <sub>VO(p+1)</sub> | Counter Enabled—Internal Address generation                       |

## NOTES:

- "H" = V<sub>IH</sub>, "L" = V<sub>IL</sub>, "X" = Don't Care.
- Read and write operations are controlled by the appropriate setting of R/ $\overline{W}$ ,  $\overline{CE}_0$ , CE<sub>1</sub>,  $\overline{BE}_n$  and  $\overline{OE}$ .
- Outputs configured in flow-through output mode: if outputs are in pipelined mode the data out will be delayed by one cycle.
- $\overline{ADS}$  and  $\overline{REPEAT}$  are independent of all other memory control signals including  $\overline{CE}_0$ , CE<sub>1</sub> and  $\overline{BE}_n$ .
- The address counter advances if  $\overline{CNTEN}$  = V<sub>IL</sub> on the rising edge of CLK, regardless of all other memory control signals including  $\overline{CE}_0$ , CE<sub>1</sub>,  $\overline{BE}_n$ .
- When  $\overline{REPEAT}$  is asserted, the counter will reset to the last valid address loaded via  $\overline{ADS}$ . This value is not set at power-up: a known location should be loaded via  $\overline{ADS}$  during initialization if desired. Any subsequent  $\overline{ADS}$  access during operations will update the  $\overline{REPEAT}$  address location.

5617 tbl 03

## Recommended Operating Temperature and Supply Voltage<sup>(1)</sup>

| Grade      | Ambient Temperature | GND | V <sub>DD</sub> |
|------------|---------------------|-----|-----------------|
| Commercial | 0°C to +70°C        | 0V  | 3.3V ± 150mV    |
| Industrial | -40°C to +85°C      | 0V  | 3.3V ± 150mV    |

### NOTES:

- This is the parameter TA. This is the "instant on" case temperature.

5617 tbl 04

## Absolute Maximum Ratings<sup>(1)</sup>

| Symbol                           | Rating                               | Commercial & Industrial | Unit |
|----------------------------------|--------------------------------------|-------------------------|------|
| V <sub>TERM</sub> <sup>(2)</sup> | Terminal Voltage with Respect to GND | -0.5 to +4.6            | V    |
| T <sub>BIAS</sub> <sup>(3)</sup> | Temperature Under Bias               | -55 to +125             | °C   |
| T <sub>STG</sub>                 | Storage Temperature                  | -65 to +150             | °C   |
| T <sub>JN</sub>                  | Junction Temperature                 | +150                    | °C   |
| I <sub>OUT</sub>                 | DC Output Current                    | 50                      | mA   |

### NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- V<sub>TERM</sub> must not exceed V<sub>DD</sub> + 150mV for more than 25% of the cycle time or 4ns maximum, and is limited to ≤ 20mA for the period of V<sub>TERM</sub> ≥ V<sub>DD</sub> + 150mV.
- Ambient Temperature Under Bias. No AC Conditions. Chip Deselected.

5617 tbl 06

## Recommended DC Operating Conditions with V<sub>DDQ</sub> at 2.5V

| Symbol           | Parameter                                     | Min.                | Typ. | Max.                                    | Unit |
|------------------|---|---------------------|------|---|------|
| V <sub>DD</sub>  | Core Supply Voltage                           | 3.15                | 3.3  | 3.45                                    | V    |
| V <sub>DDQ</sub> | I/O Supply Voltage <sup>(3)</sup>             | 2.4                 | 2.5  | 2.6                                     | V    |
| V <sub>SS</sub>  | Ground  | 0                   | 0    | 0                                       | V    |
| V <sub>IH</sub>  | Input High Voltage (Address & Control Inputs) | 1.7                 | —    | V <sub>DDQ</sub> + 100mV <sup>(2)</sup> | V    |
| V <sub>IH</sub>  | Input High Voltage - I/O <sup>(3)</sup>       | 1.7                 | —    | V <sub>DDQ</sub> + 100mV <sup>(2)</sup> | V    |
| V <sub>IL</sub>  | Input Low Voltage                             | -0.3 <sup>(1)</sup> | —    | 0.7                                     | V    |

### NOTES:

- Undershoot of V<sub>IL</sub> ≥ -1.5V for pulse width less than 10ns is allowed.
- V<sub>TERM</sub> must not exceed V<sub>DDQ</sub> + 100mV.
- To select operation at 2.5V levels on the I/Os and controls of a given port, the OPT pin for that port must be set to V<sub>IL</sub> (0V), and V<sub>DDQX</sub> for that port must be supplied as indicated above.

5617 tbl 05a

## Recommended DC Operating Conditions with V<sub>DDQ</sub> at 3.3V

| Symbol           | Parameter  | Min.                | Typ. | Max.                                    | Unit |
|------------------|--|---------------------|------|---|------|
| V <sub>DD</sub>  | Core Supply Voltage  | 3.15                | 3.3  | 3.45                                    | V    |
| V <sub>DDQ</sub> | I/O Supply Voltage <sup>(3)</sup>                            | 3.15                | 3.3  | 3.45                                    | V    |
| V <sub>SS</sub>  | Ground   | 0                   | 0    | 0                                       | V    |
| V <sub>IH</sub>  | Input High Voltage (Address & Control Inputs) <sup>(3)</sup> | 2.0                 | —    | V <sub>DDQ</sub> + 150mV <sup>(2)</sup> | V    |
| V <sub>IH</sub>  | Input High Voltage - I/O <sup>(3)</sup>                      | 2.0                 | —    | V <sub>DDQ</sub> + 150mV <sup>(2)</sup> | V    |
| V <sub>IL</sub>  | Input Low Voltage  | -0.3 <sup>(1)</sup> | —    | 0.8                                     | V    |

### NOTES:

- Undershoot of V<sub>IL</sub> ≥ -1.5V for pulse width less than 10ns is allowed.
- V<sub>TERM</sub> must not exceed V<sub>DDQ</sub> + 150mV.
- To select operation at 3.3V levels on the I/Os and controls of a given port, the OPT pin for that port must be set to V<sub>IH</sub> (3.3V), and V<sub>DDQX</sub> for that port must be supplied as indicated above.

5617 tbl 05b

Capacitance<sup>(1)</sup>

(TA = +25°C, F = 1.0MHz) PQFP ONLY

| Symbol                          | Parameter          | Conditions <sup>(2)</sup> | Max. | Unit |
|---------------------------------|--------------------|---------------------------|------|------|
| C <sub>IN</sub>                 | Input Capacitance  | V <sub>IN</sub> = 3dV     | 8    | pF   |
| C <sub>OUT</sub> <sup>(3)</sup> | Output Capacitance | V <sub>OUT</sub> = 3dV    | 10.5 | pF   |

5617 tbl 07

## NOTES:

1. These parameters are determined by device characterization, but are not production tested.
2. 3dV references the interpolated capacitance when the input and output switch from 0V to 3V or from 3V to 0V.
3. C<sub>OUT</sub> also references C<sub>I/O</sub>.

DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range (V<sub>DD</sub> = 3.3V ± 150mV)

| Symbol                 | Parameter                             | Test Conditions  | 70V3599/89S |      | Unit |
|------------------------|---------------------------------------|--|-------------|------|------|
|                        |                                       |  | Min.        | Max. |      |
| I <sub>L</sub>         | Input Leakage Current <sup>(1)</sup>  | V <sub>DDQ</sub> = Max., V <sub>IN</sub> = 0V to V <sub>DDQ</sub>  | —           | 10   | μA   |
| I <sub>LO</sub>        | Output Leakage Current <sup>(1)</sup> | $\overline{CE_0}$ = V <sub>IH</sub> or CE <sub>1</sub> = V <sub>IL</sub> , V <sub>OUT</sub> = 0V to V <sub>DDQ</sub> | —           | 10   | μA   |
| V <sub>OL</sub> (3.3V) | Output Low Voltage <sup>(2)</sup>     | I <sub>OL</sub> = +4mA, V <sub>DDQ</sub> = Min.  | —           | 0.4  | V    |
| V <sub>OH</sub> (3.3V) | Output High Voltage <sup>(2)</sup>    | I <sub>OH</sub> = -4mA, V <sub>DDQ</sub> = Min.  | 2.4         | —    | V    |
| V <sub>OL</sub> (2.5V) | Output Low Voltage <sup>(2)</sup>     | I <sub>OL</sub> = +2mA, V <sub>DDQ</sub> = Min.  | —           | 0.4  | V    |
| V <sub>OH</sub> (2.5V) | Output High Voltage <sup>(2)</sup>    | I <sub>OH</sub> = -2mA, V <sub>DDQ</sub> = Min.  | 2.0         | —    | V    |

5617 tbl 08

## NOTE:

1. At V<sub>DD</sub> ≤ 2.0V leakages are undefined.
2. V<sub>DDQ</sub> is selectable (3.3V/2.5V) via OPT pins. Refer to p.5 for details.



## DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range<sup>(3)</sup> ( $V_{DD} = 3.3V \pm 150mV$ )

| Symbol | Parameter   | Test Condition   | Version | 70V3599/89S166 Com'l Only |      | 70V3599/89S133 Com'l & Ind |      | Unit |    |
|--------|---|--|---------|---------------------------|------|----------------------------|------|------|----|
|        |   |  |         | Typ. <sup>(4)</sup>       | Max. | Typ. <sup>(4)</sup>        | Max. |      |    |
| IDD    | Dynamic Operating Current (Both Ports Active)         | $\overline{CE}_L$ and $\overline{CE}_R = V_{IL}$ ,<br>Outputs Disabled,<br>$f = f_{MAX}^{(1)}$   | COM'L   | S                         | 370  | 500                        | 320  | 400  | mA |
|        |   |  | IND     | S                         | —    | —                          | 320  | 480  |    |
| ISB1   | Standby Current (Both Ports - TTL Level Inputs)       | $\overline{CE}_L = \overline{CE}_R = V_{IH}$ ,<br>Outputs Disabled,<br>$f = f_{MAX}^{(1)}$   | COM'L   | S                         | 125  | 200                        | 115  | 160  | mA |
|        |   |  | IND     | S                         | —    | —                          | 115  | 195  |    |
| ISB2   | Standby Current (One Port - TTL Level Inputs)         | $\overline{CE}^{*A} = V_{IL}$ and $\overline{CE}^{*B} = V_{IH}^{(5)}$<br>Active Port Outputs Disabled,<br>$f = f_{MAX}^{(1)}$  | COM'L   | S                         | 250  | 350                        | 220  | 290  | mA |
|        |   |  | IND     | S                         | —    | —                          | 220  | 350  |    |
| ISB3   | Full Standby Current (Both Ports - CMOS Level Inputs) | Both Ports Outputs Disabled<br>$\overline{CE}_L$ and $\overline{CE}_R \geq V_{DD0} - 0.2V$ ,<br>$V_{IN} \geq V_{DD0} - 0.2V$ or $V_{IN} \leq 0.2V$ ,<br>$f = 0^{(2)}$                              | COM'L   | S                         | 15   | 30                         | 15   | 30   | mA |
|        |   |  | IND     | S                         | —    | —                          | 15   | 40   |    |
| ISB4   | Full Standby Current (One Port - CMOS Level Inputs)   | $\overline{CE}^{*A} \leq 0.2V$ and $\overline{CE}^{*B} \geq V_{DD0} - 0.2V^{(5)}$<br>$V_{IN} \geq V_{DD0} - 0.2V$ or $V_{IN} \leq 0.2V$ ,<br>Active Port, Outputs Disabled,<br>$f = f_{MAX}^{(1)}$ | COM'L   | S                         | 250  | 350                        | 220  | 290  | mA |
|        |   |  | IND     | S                         | —    | —                          | 220  | 350  |    |

5617 tbl 09



**NOTES:**

- At  $f = f_{MAX}$ , address and control lines (except Output Enable) are cycling at the maximum frequency clock cycle of  $1/t_{cvc}$ , using "AC TEST CONDITIONS" at input levels of GND to 3V.
- $f = 0$  means no address, clock, or control lines change. Applies only to input at CMOS level standby.
- Port "A" may be either left or right port. Port "B" is the opposite from port "A".
- $V_{DD} = 3.3V$ ,  $T_A = 25^\circ C$  for Typ, and are not production tested.  $I_{DD} DC(f=0) = 120mA$  (Typ).
- $\overline{CE}_X = V_{IL}$  means  $\overline{CE}_{0X} = V_{IL}$  and  $CE_{1X} = V_{IH}$   
 $\overline{CE}_X = V_{IH}$  means  $\overline{CE}_{0X} = V_{IH}$  or  $CE_{1X} = V_{IL}$   
 $\overline{CE}_X \leq 0.2V$  means  $\overline{CE}_{0X} \leq 0.2V$  and  $CE_{1X} \geq V_{DD0} - 0.2V$   
 $\overline{CE}_X \geq V_{DD0} - 0.2V$  means  $\overline{CE}_{0X} \geq V_{DD0} - 0.2V$  or  $CE_{1X} \leq 0.2V$   
"X" represents "L" for left port or "R" for right port.

AC Test Conditions (V<sub>DDQ</sub> - 3.3V/2.5V)


|   |                         |
|---|-------------------------|
| Input Pulse Levels (Address & Controls) | GND to 3.0V/GND to 2.4V |
| Input Pulse Levels (I/Os)               | GND to 3.0V/GND to 2.4V |
| Input Rise/Fall Times                   | 2ns                     |
| Input Timing Reference Levels           | 1.5V/1.25V              |
| Output Reference Levels                 | 1.5V/1.25V              |
| Output Load                             | Figures 1 and 2         |

5617 tbl 10

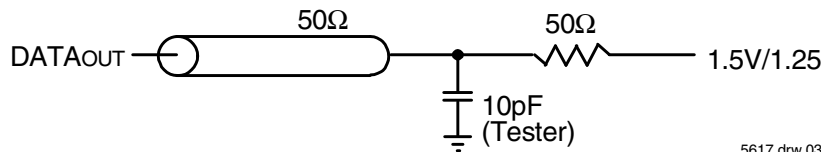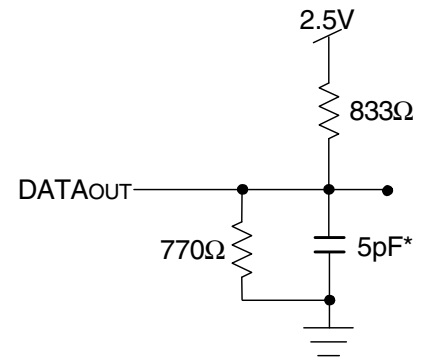


5617 drw 03

Figure 1. AC Output Test load.

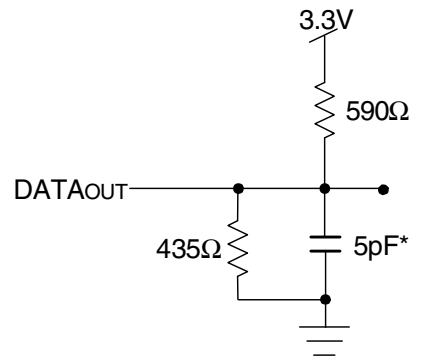

5617 drw 04

Figure 2. Output Test Load  
(For t<sub>CKLZ</sub>, t<sub>CKHZ</sub>, t<sub>OLZ</sub>, and t<sub>OHZ</sub>).  
\*Including scope and jig.

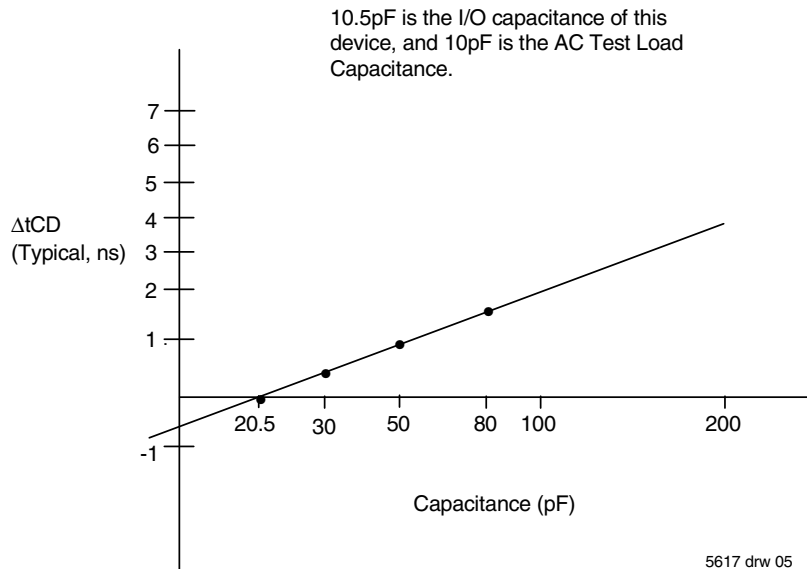

5617 drw 05

Figure 3. Typical Output Derating (Lumped Capacitive Load).

## AC Electrical Characteristics Over the Operating Temperature Range (Read and Write Cycle Timing)<sup>(2,3)</sup> ( $V_{DD} = 3.3V \pm 150mV$ )


| Symbol                    | Parameter   | 70V3599/89S166<br>Com1 Only |      | 70V3599/89S133<br>Com1<br>& Ind |      | Unit |
|---------------------------|---|-----------------------------|------|---------------------------------|------|------|
|                           |   | Min.                        | Max. | Min.                            | Max. |      |
| t <sub>CYC1</sub>         | Clock Cycle Time (Flow-Through) <sup>(1)</sup>    | 20                          | —    | 25                              | —    | ns   |
| t <sub>CYC2</sub>         | Clock Cycle Time (Pipelined) <sup>(1)</sup>       | 6                           | —    | 7.5                             | —    | ns   |
| t <sub>CH1</sub>          | Clock High Time (Flow-Through) <sup>(1)</sup>     | 6                           | —    | 7                               | —    | ns   |
| t <sub>CL1</sub>          | Clock Low Time (Flow-Through) <sup>(1)</sup>      | 6                           | —    | 7                               | —    | ns   |
| t <sub>CH2</sub>          | Clock High Time (Pipelined) <sup>(2)</sup>        | 2.1                         | —    | 2.6                             | —    | ns   |
| t <sub>CL2</sub>          | Clock Low Time (Pipelined) <sup>(1)</sup>         | 2.1                         | —    | 2.6                             | —    | ns   |
| t <sub>SA</sub>           | Address Setup Time                                | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HA</sub>           | Address Hold Time                                 | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>SC</sub>           | Chip Enable Setup Time                            | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HC</sub>           | Chip Enable Hold Time                             | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>SB</sub>           | Byte Enable Setup Time                            | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HB</sub>           | Byte Enable Hold Time                             | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>SW</sub>           | R/W Setup Time                                    | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HW</sub>           | R/W Hold Time                                     | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>SD</sub>           | Input Data Setup Time                             | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HD</sub>           | Input Data Hold Time                              | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>SAD</sub>          | $\overline{ADS}$ Setup Time                       | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HAD</sub>          | $\overline{ADS}$ Hold Time                        | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>SCN</sub>          | $\overline{CNTEN}$ Setup Time                     | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HCN</sub>          | $\overline{CNTEN}$ Hold Time                      | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>SRPT</sub>         | $\overline{REPEAT}$ Setup Time                    | 1.7                         | —    | 1.8                             | —    | ns   |
| t <sub>HRPT</sub>         | $\overline{REPEAT}$ Hold Time                     | 0.5                         | —    | 0.5                             | —    | ns   |
| t <sub>OE</sub>           | Output Enable to Data Valid                       | —                           | 4.0  | —                               | 4.2  | ns   |
| t <sub>OLZ</sub>          | Output Enable to Output Low-Z                     | 1                           | —    | 1                               | —    | ns   |
| t <sub>OHZ</sub>          | Output Enable to Output High-Z                    | 1                           | 3.6  | 1                               | 4.2  | ns   |
| t <sub>CD1</sub>          | Clock to Data Valid (Flow-Through) <sup>(1)</sup> | —                           | 12   | —                               | 15   | ns   |
| t <sub>CD2</sub>          | Clock to Data Valid (Pipelined) <sup>(1)</sup>    | —                           | 3.6  | —                               | 4.2  | ns   |
| t <sub>DC</sub>           | Data Output Hold After Clock High                 | 1                           | —    | 1                               | —    | ns   |
| t <sub>CKHZ</sub>         | Clock High to Output High-Z                       | 1                           | 3    | 1                               | 3    | ns   |
| t <sub>CKLZ</sub>         | Clock High to Output Low-Z                        | 1                           | —    | 1                               | —    | ns   |
| <b>Port-to-Port Delay</b> |   |                             |      |                                 |      |      |
| t <sub>CO</sub>           | Clock-to-Clock Offset                             | 5                           | —    | 6                               | —    | ns   |

5617 tbl 11

**NOTES:**


- The Pipelined output parameters (t<sub>CYC2</sub>, t<sub>CD2</sub>) apply to either or both left and right ports when  $\overline{FT}/PIPEX = V_{IH}$ . Flow-through parameters (t<sub>CYC1</sub>, t<sub>CD1</sub>) apply when  $\overline{FT}/PIPE = V_{IL}$  for that port.
- All input signals are synchronous with respect to the clock except for the asynchronous Output Enable ( $\overline{OE}$ ) and  $\overline{FT}/PIPE$ .  $\overline{FT}/PIPE$  should be treated as a DC signal, i.e. steady state during operation.
- These values are valid for either level of V<sub>DDO</sub> (3.3V/2.5V). See page 5 for details on selecting the desired operating voltage levels for each port.

## Timing Waveform of Read Cycle for Pipelined Operation ( $\overline{\text{FT}}/\text{PIPE}^{\text{X}} = \text{V}_{\text{IH}}$ )<sup>(2)</sup>

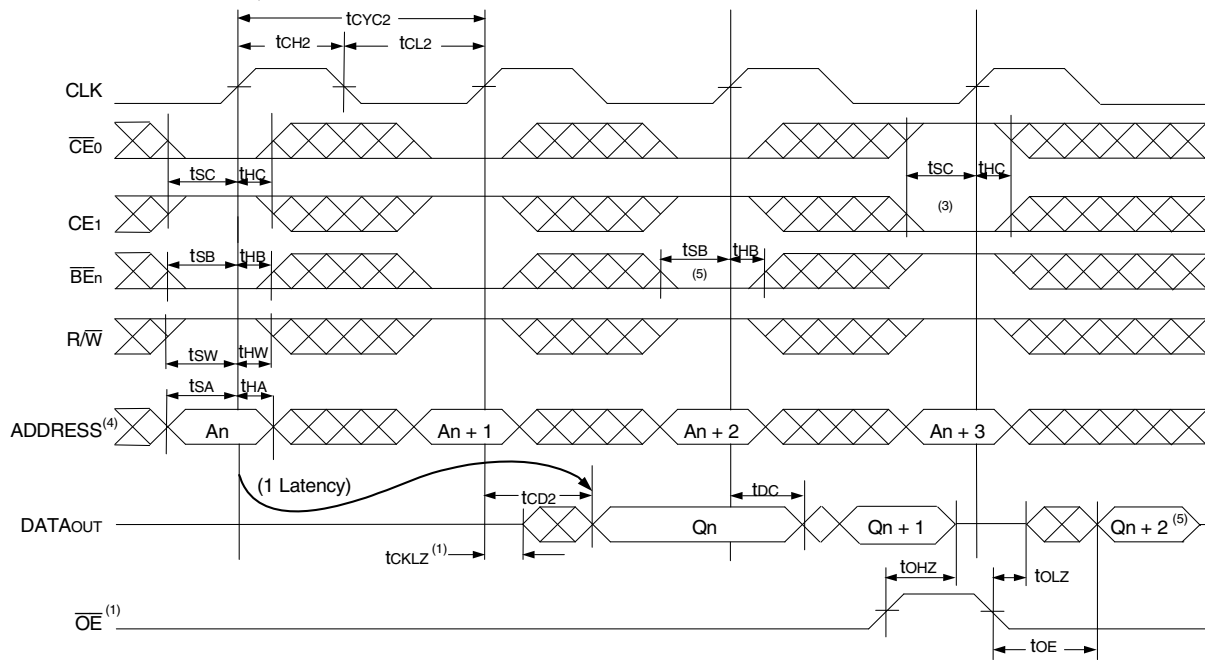

5617 drw 06

## Timing Waveform of Read Cycle for Flow-through Output ( $\overline{\text{FT}}/\text{PIPE}^{\text{X}} = \text{V}_{\text{IL}}$ )<sup>(2,6)</sup>

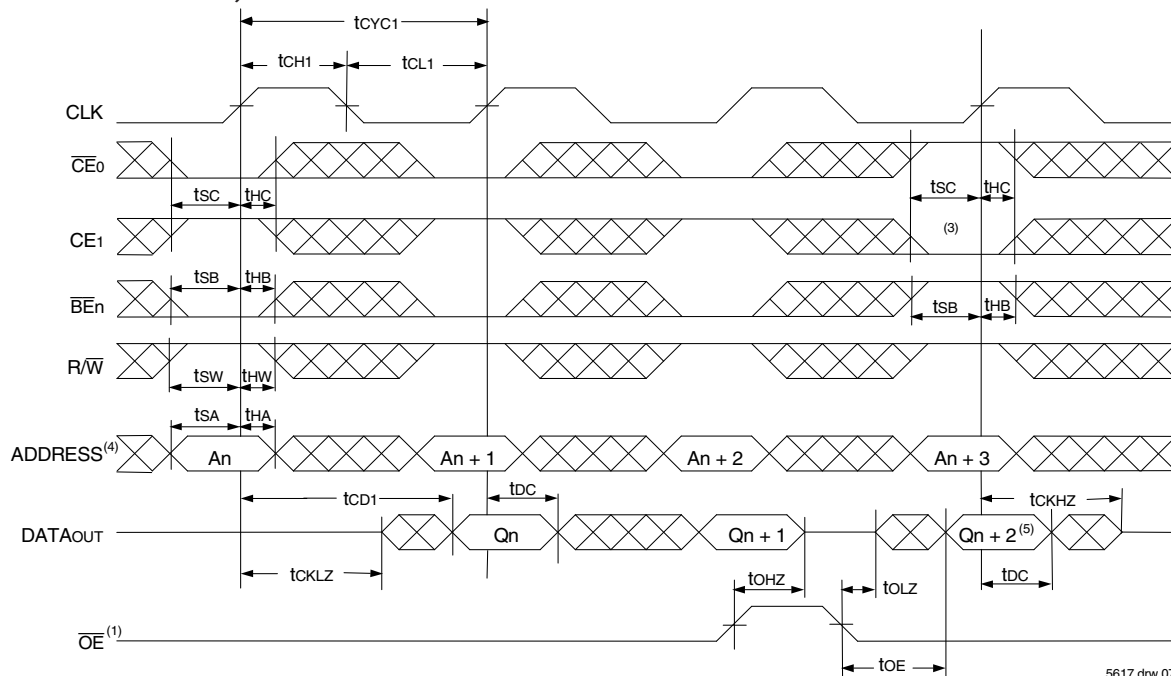


5617 drw 07

### NOTES:


1.  $\overline{\text{OE}}$  is asynchronously controlled; all other inputs are synchronous to the rising clock edge.
2.  $\text{ADS} = \text{V}_{\text{IL}}$  and  $\text{REPEAT} = \text{V}_{\text{IH}}$ .
3. The output is disabled (High-Impedance state) by  $\overline{\text{CE}}_0 = \text{V}_{\text{IH}}$ ,  $\text{CE}_1 = \text{V}_{\text{IL}}$ ,  $\overline{\text{BE}}_n = \text{V}_{\text{IH}}$  following the next rising edge of the clock. Refer to Truth Table 1.
4. Addresses do not have to be accessed sequentially since  $\overline{\text{ADS}} = \text{V}_{\text{IL}}$  constantly loads the address on the rising edge of the CLK; numbers are for reference use only.
5. If  $\overline{\text{BE}}_n$  was HIGH, then the appropriate Byte of DATAout for  $\text{Q}_n + 2$  would be disabled (High-Impedance state).
6. "x" denotes Left or Right port. The diagram is with respect to that port.

### Timing Waveform of a Multi-Device Pipelined Read<sup>(1,2)</sup>

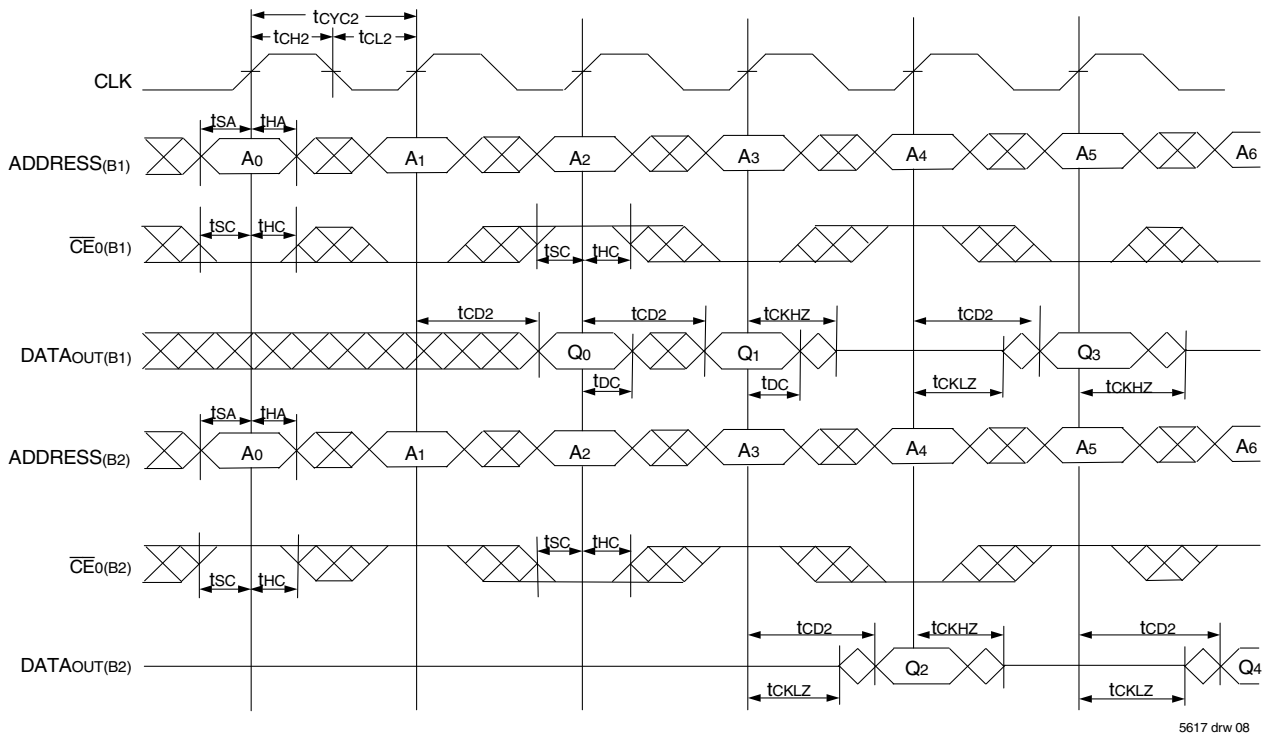

5617 drw 08


### Timing Waveform of a Multi-Device Flow-Through Read<sup>(1,2)</sup>

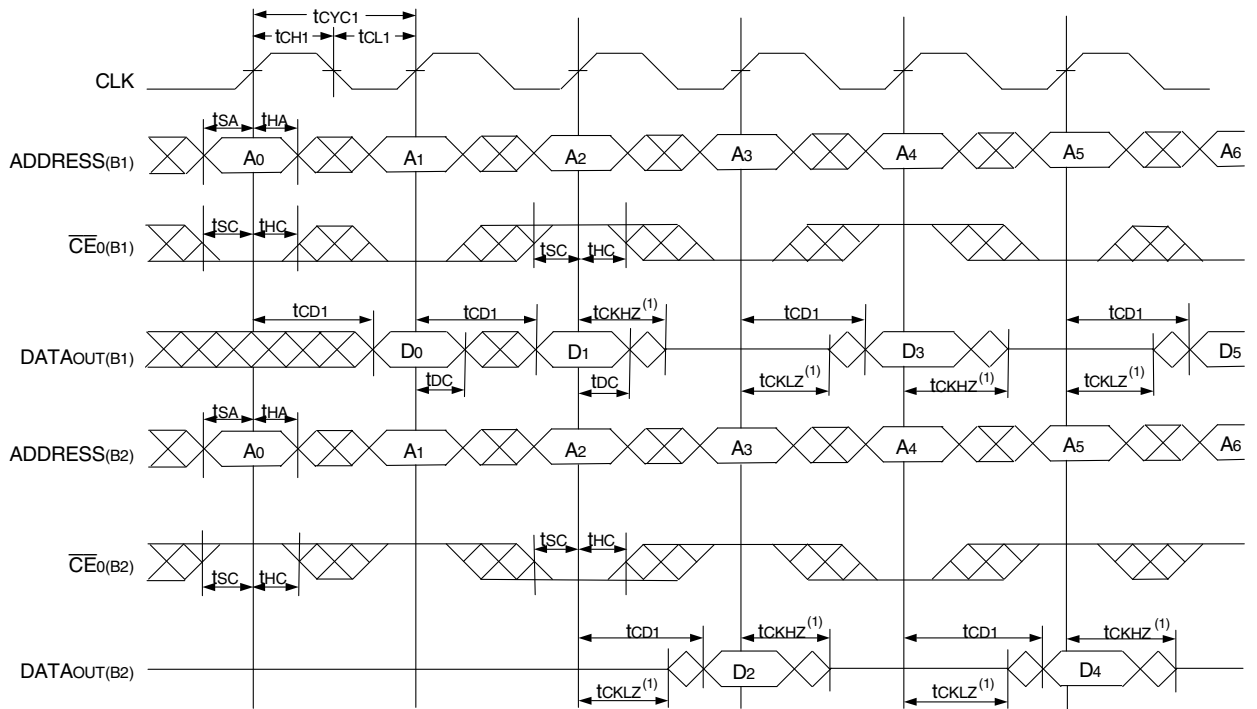

5617 drw 09

**NOTES:**


1. B1 Represents Device #1; B2 Represents Device #2. Each Device consists of one IDT70V3599/89 for this waveform, and are setup for depth expansion in this example. ADDRESS(B1) = ADDRESS(B2) in this situation.
2. BE<sub>n</sub>, OE, and ADS = V<sub>IL</sub>; CE<sub>1</sub>(B1), CE<sub>1</sub>(B2), R/W and REPEAT = V<sub>IH</sub>.

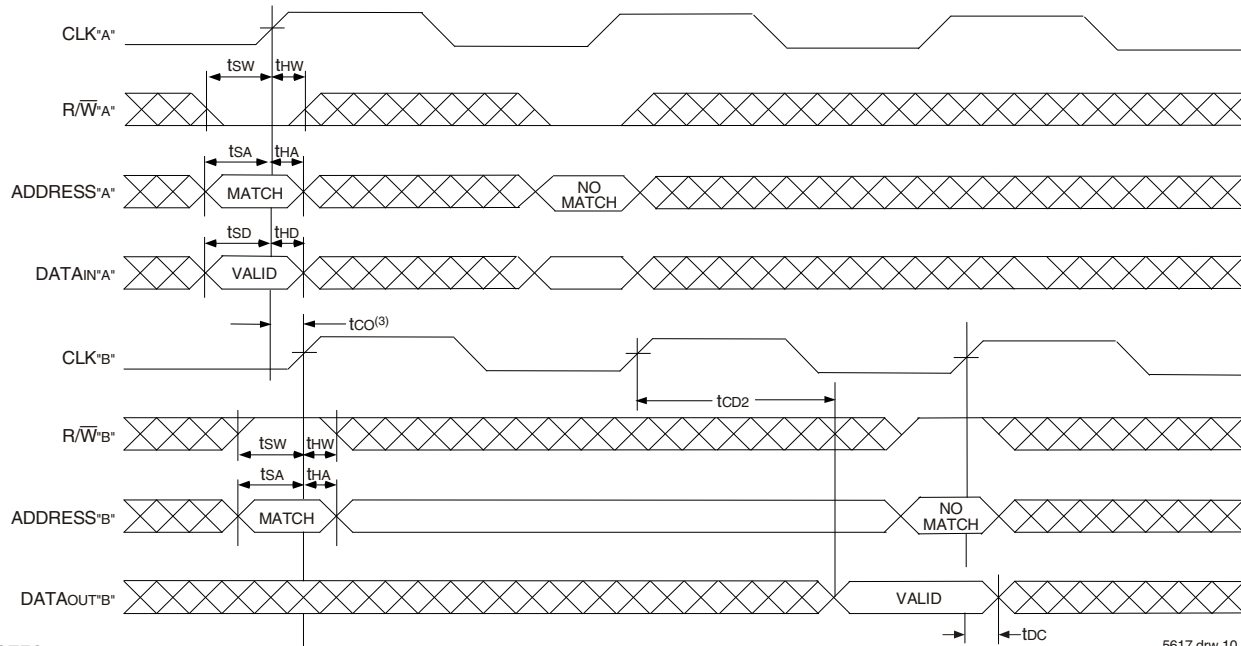Timing Waveform of Left Port Write to Pipelined Right Port Read<sup>(1,2,4)</sup>

5617 drw 10

## NOTES:

- $\overline{CE}_0$ ,  $\overline{BE}_n$ , and  $\overline{ADS} = V_{IL}$ ;  $CE_1$  and  $\overline{REPEAT} = V_{IH}$ .
- $\overline{OE} = V_{IL}$  for Port "B", which is being read from.  $\overline{OE} = V_{IH}$  for Port "A", which is being written to.
- If  $t_{co} \leq$  minimum specified, then data from Port "B" read is not valid until following Port "B" clock cycle (ie, time from write to valid read on opposite port will be  $t_{co} + 2 t_{cyc2} + t_{cd2}$ ). If  $t_{co} >$  minimum, then data from Port "B" read is available on first Port "B" clock cycle (ie, time from write to valid read on opposite port will be  $t_{co} + t_{cyc2} + t_{cd2}$ ).
- All timing is the same for Left and Right ports. Port "A" may be either Left or Right port. Port "B" is the opposite of Port "A"

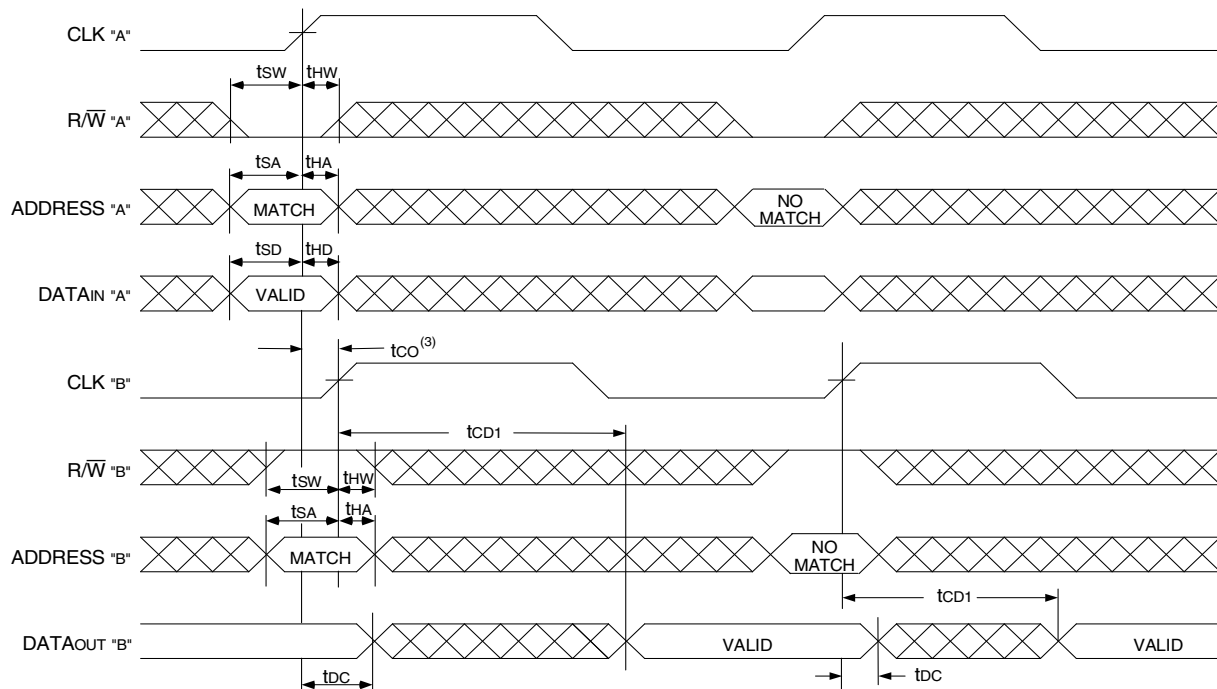
Timing Waveform with Port-to-Port Flow-Through Read<sup>(1,2,4)</sup>

5617 drw 11

## NOTES:

- $\overline{CE}_0$ ,  $\overline{BE}_n$ , and  $\overline{ADS} = V_{IL}$ ;  $CE_1$  and  $\overline{REPEAT} = V_{IH}$ .
- $\overline{OE} = V_{IL}$  for the Right Port, which is being read from.  $\overline{OE} = V_{IH}$  for the Left Port, which is being written to.
- If  $t_{co} \leq$  minimum specified, then data from Port "B" read is not valid until following Port "B" clock cycle (i.e., time from write to valid read on opposite port will be  $t_{co} + t_{cyc} + t_{cd1}$ ). If  $t_{co} >$  minimum, then data from Port "B" read is available on first Port "B" clock cycle (i.e., time from write to valid read on opposite port will be  $t_{co} + t_{cd1}$ ).
- All timing is the same for both left and right ports. Port "A" may be either left or right port. Port "B" is the opposite of Port "A".

## Timing Waveform of Pipelined Read-to-Write-to-Read ( $\overline{OE} = V_{IL}$ )<sup>(2)</sup>

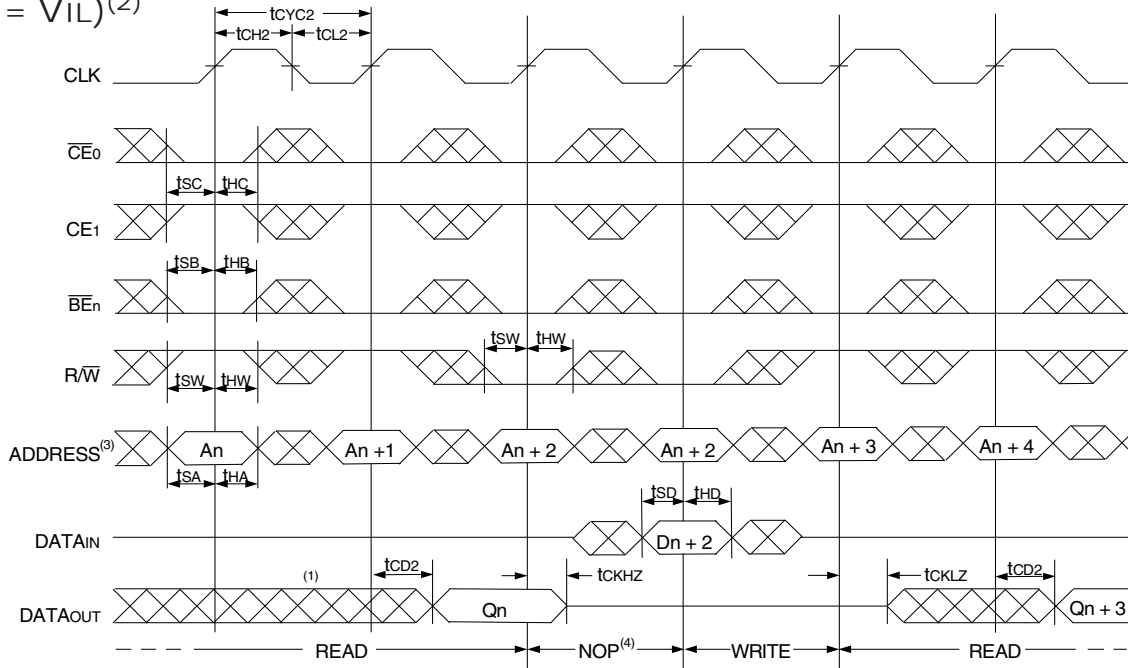


### NOTES:

1. Output state (High, Low, or High-impedance) is determined by the previous cycle control signals.
2.  $\overline{CE}_0$ ,  $\overline{BE}_n$ , and  $\overline{ADS} = V_{IL}$ ;  $\overline{CE}_1$  and REPEAT =  $V_{IH}$ . "NOP" is "No Operation".
3. Addresses do not have to be accessed sequentially since  $\overline{ADS} = V_{IL}$  constantly loads the address on the rising edge of the CLK; numbers are for reference use only.
4. "NOP" is "No Operation." Data in memory at the selected address may be corrupted and should be re-written to guarantee data integrity.

5617 drw 12

## Timing Waveform of Pipelined Read-to-Write-to-Read ( $\overline{OE}$ Controlled)<sup>(2)</sup>

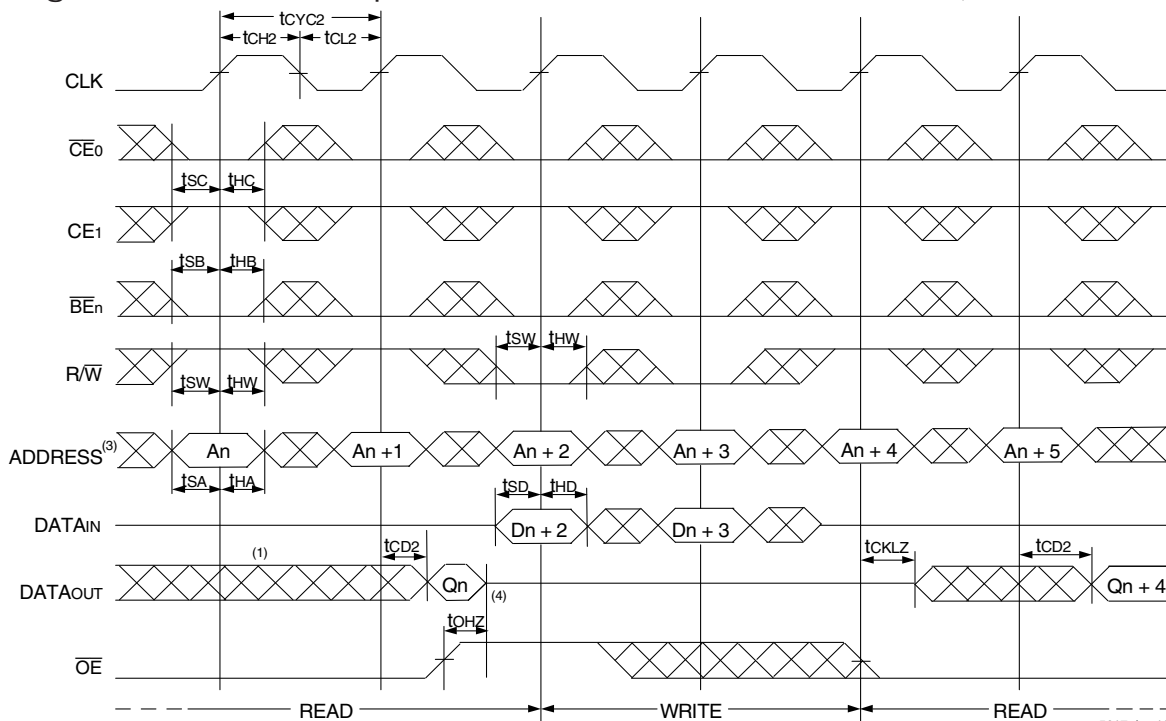


### NOTES:


1. Output state (High, Low, or High-impedance) is determined by the previous cycle control signals.
2.  $\overline{CE}_0$ ,  $\overline{BE}_n$ , and  $\overline{ADS} = V_{IL}$ ;  $\overline{CE}_1$  and REPEAT =  $V_{IH}$ .
3. Addresses do not have to be accessed sequentially since  $\overline{ADS} = V_{IL}$  constantly loads the address on the rising edge of the CLK; numbers are for reference use only.
4. This timing does not meet requirements for fastest speed grade. This waveform indicates how logically it could be done if timing so allows.

5617 drw 13

Timing Waveform of Flow-Through Read-to-Write-to-Read ( $\overline{OE} = V_{IL}$ )<sup>(2)</sup>

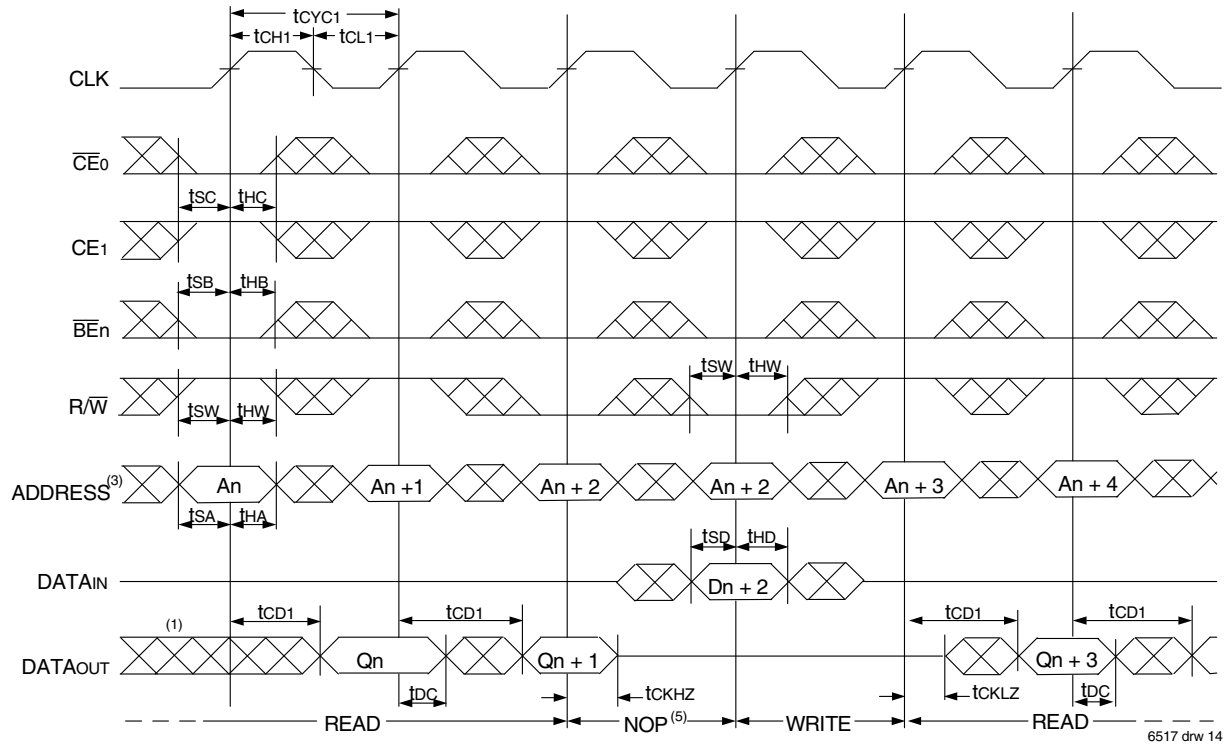

Timing Waveform of Flow-Through Read-to-Write-to-Read ( $\overline{OE}$  Controlled)<sup>(2)</sup>

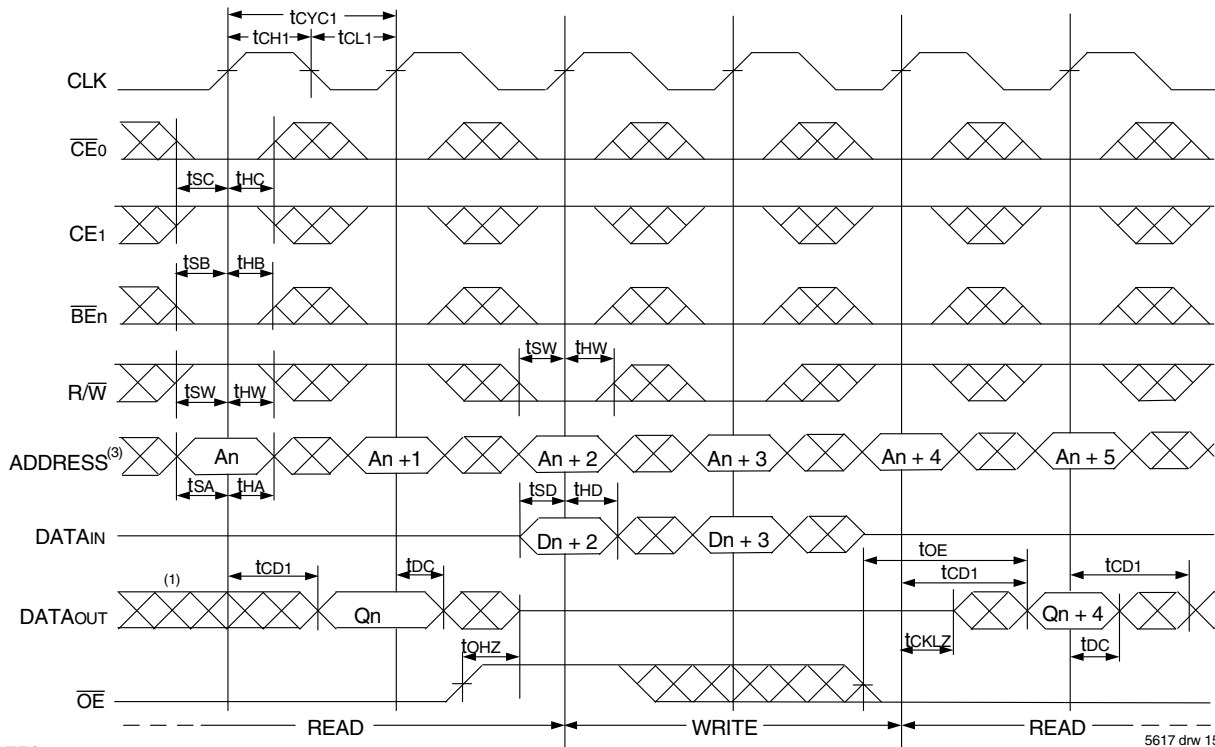


NOTES:


1. Output state (High, Low, or High-impedance) is determined by the previous cycle control signals.
2.  $\overline{CE}_0$ ,  $\overline{BEn}$ , and  $\overline{ADS} = V_{IL}$ ;  $\overline{CE}_1$  and  $\overline{REPEAT} = V_{IH}$ .
3. Addresses do not have to be accessed sequentially since  $\overline{ADS} = V_{IL}$  constantly loads the address on the rising edge of the CLK; numbers are for reference use only.
4. "NOP" is "No Operation." Data in memory at the selected address may be corrupted and should be re-written to guarantee data integrity.



### Timing Waveform of Pipelined Read with Address Counter Advance<sup>(1)</sup>

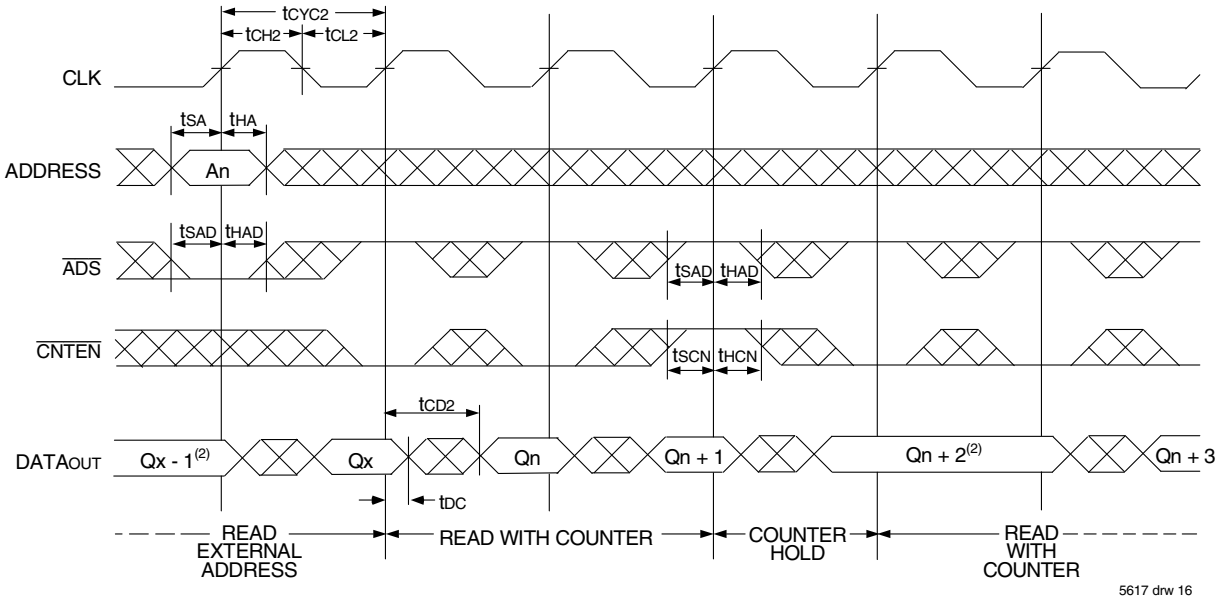


### Timing Waveform of Flow-Through Read with Address Counter Advance<sup>(1)</sup>

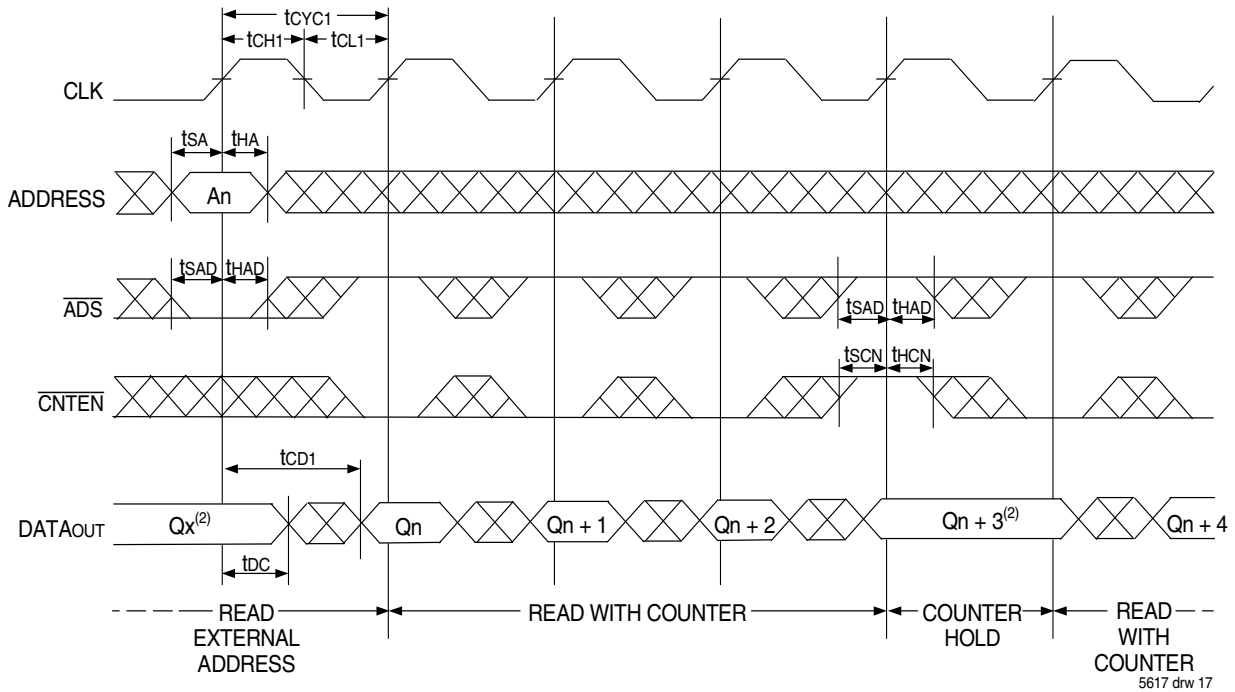


**NOTES:**

1.  $\overline{CE_0}$ ,  $\overline{OE}$ ,  $\overline{BE_n} = V_{IL}$ ;  $\overline{CE_1}$ ,  $R/\overline{W}$ , and  $\overline{REPEAT} = V_{IH}$ .
2. If there is no address change via  $\overline{ADS} = V_{IL}$  (loading a new address) or  $\overline{CNTEN} = V_{IL}$  (advancing the address), i.e.  $\overline{ADS} = V_{IH}$  and  $\overline{CNTEN} = V_{IH}$ , then the data output remains constant for subsequent clocks.

## Timing Waveform of Write with Address Counter Advance (Flow-through or Pipelined Inputs)<sup>(1)</sup>

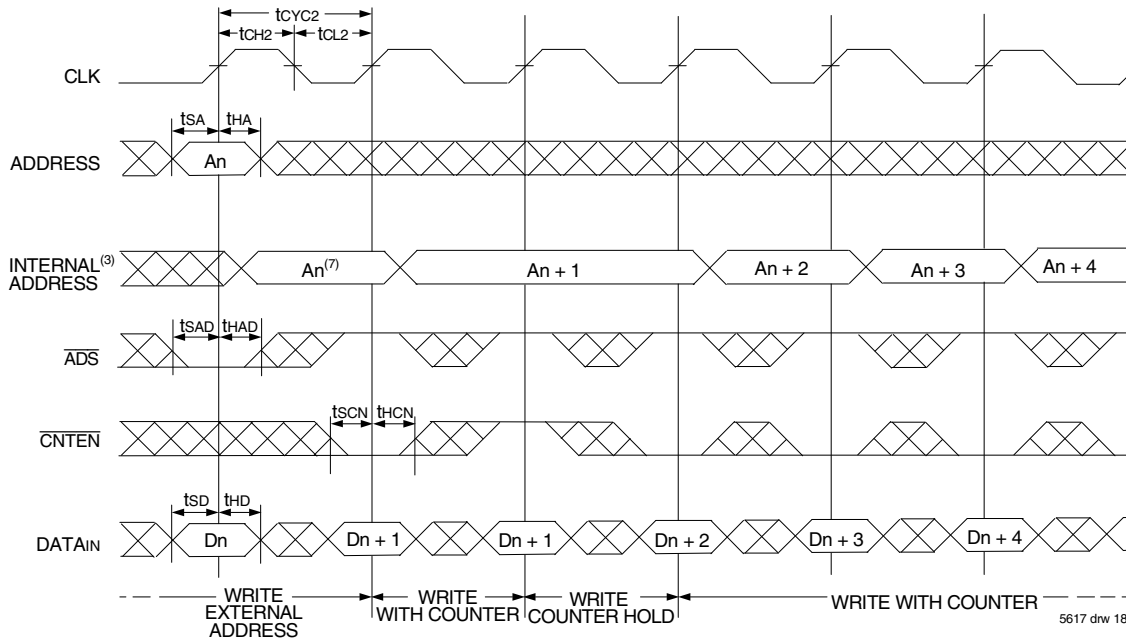

## Timing Waveform of Counter Repeat<sup>(2)</sup>

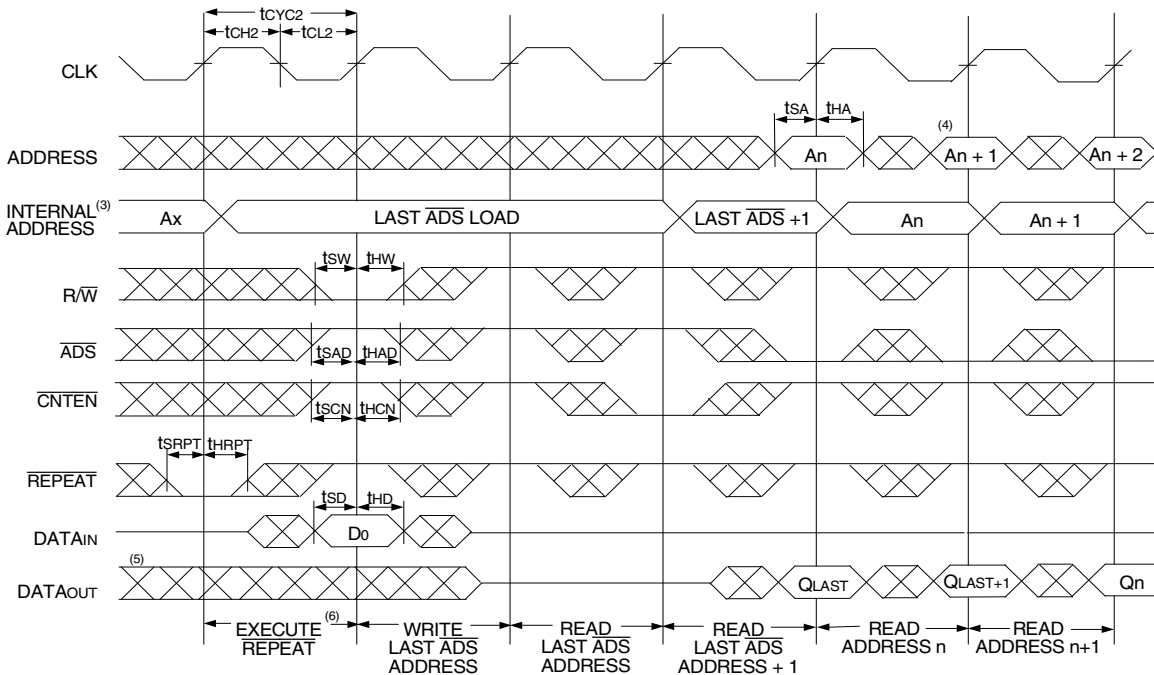

### NOTES:

1.  $\overline{CE}_0$ ,  $\overline{BE}_n$ , and  $R/\overline{W}$  =  $V_{IL}$ ;  $CE_1$  and  $\overline{REPEAT}$  =  $V_{IH}$ .
2.  $\overline{CE}_0$ ,  $\overline{BE}_n$  =  $V_{IL}$ ;  $CE_1$  =  $V_{IH}$ .
3. The "Internal Address" is equal to the "External Address" when  $\overline{ADS} = V_{IL}$  and equals the counter output when  $\overline{ADS} = V_{IH}$ .
4. Addresses do not have to be accessed sequentially since  $\overline{ADS} = V_{IL}$  constantly loads the address on the rising edge of the CLK; numbers are for reference use only.
5. Output state (High, Low, or High-impedance) is determined by the previous cycle control signals.
6. No dead cycle exists during  $\overline{REPEAT}$  operation. A READ or WRITE cycle may be coincidental with the counter  $\overline{REPEAT}$  cycle: Address loaded by last valid  $\overline{ADS}$  load will be accessed. Extra cycles are shown here simply for clarification. For more information on  $\overline{REPEAT}$  function refer to Truth Table II.
7.  $\overline{CNTEN} = V_{IL}$  advances Internal Address from 'An' to 'An + 1'. The transition shown indicates the time required for the counter to advance. The 'An + 1' Address is written to during this cycle.

## Functional Description

The IDT70V3599/89 provides a true synchronous Dual-Port Static RAM interface. Registered inputs provide minimal set-up and hold times on address, data, and all critical control inputs. All internal registers are clocked on the rising edge of the clock signal, however, the self-timed internal write pulse is independent of the LOW to HIGH transition of the clock signal.

An asynchronous output enable is provided to ease asynchronous bus interfacing. Counter enable inputs are also provided to stall the operation of the address counters for fast interleaved memory applications.

A HIGH on  $\overline{CE_0}$  or a LOW on  $CE_1$  for one clock cycle will power down the internal circuitry to reduce static power consumption. Multiple chip enables allow easier banking of multiple IDT70V3599/89s for depth expansion configurations. Two cycles are required with  $\overline{CE_0}$  LOW and  $CE_1$  HIGH to re-activate the outputs.

## Depth and Width Expansion

The IDT70V3599/89 features dual chip enables (refer to Truth Table I) in order to facilitate rapid and simple depth expansion with no requirements for external logic. Figure 4 illustrates how to control the various chip enables in order to expand two devices in depth.

The IDT70V3599/89 can also be used in applications requiring expanded width, as indicated in Figure 4. Through combining the control signals, the devices can be grouped as necessary to accommodate applications needing 72-bits or wider.

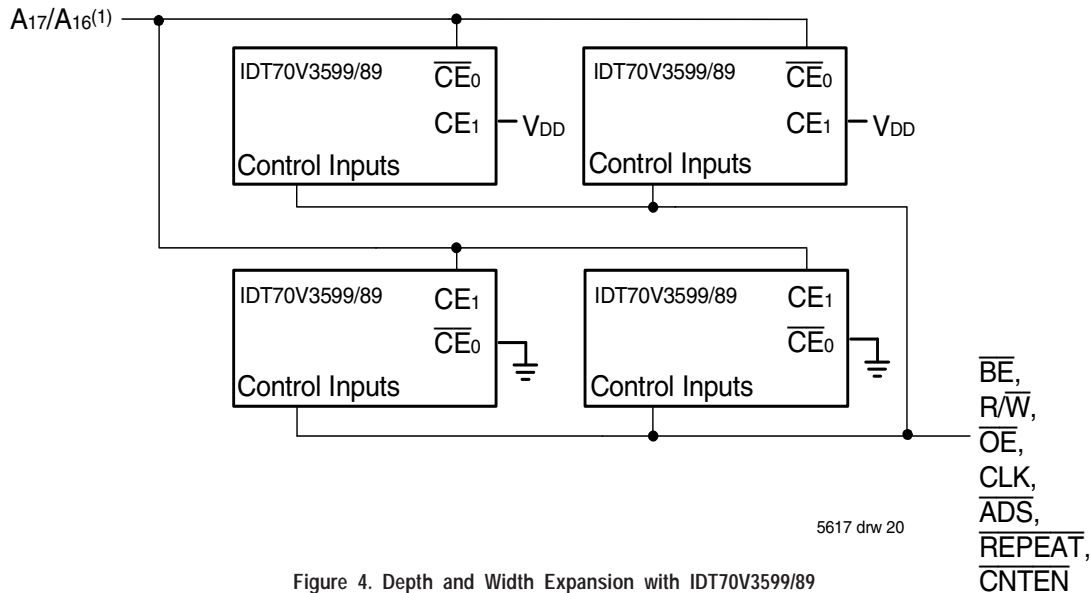


Figure 4. Depth and Width Expansion with IDT70V3599/89

**NOTE:**

1. A17 is for IDT70V3599, A16 is for IDT70V3589.

## JTAG Timing Specifications

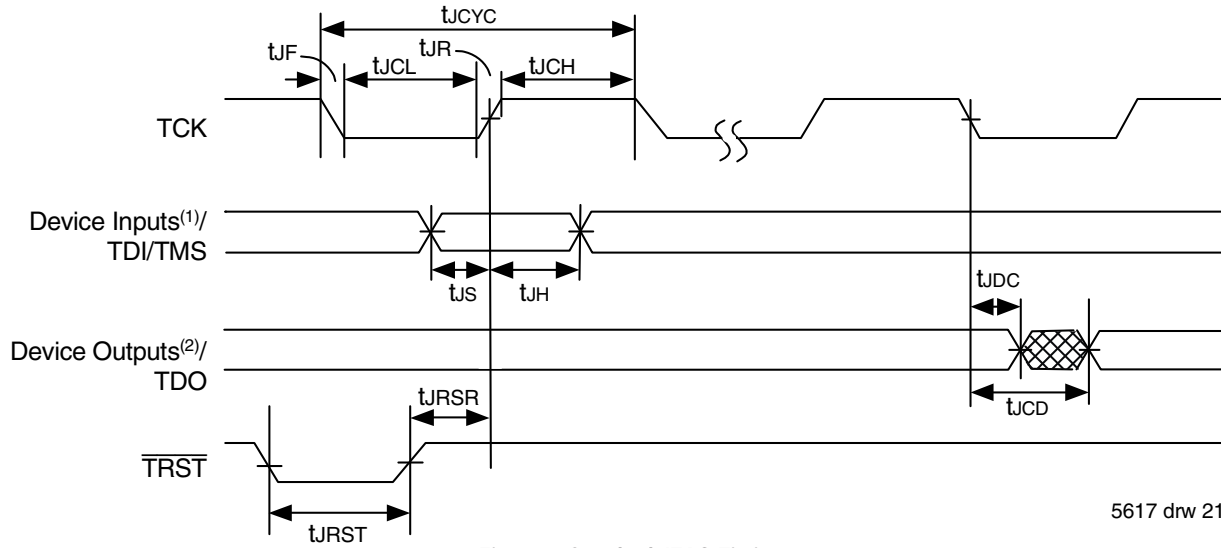


Figure 5. Standard JTAG Timing

**NOTES:**

1. Device inputs = All device inputs except TDI, TMS, and TRST.
2. Device outputs = All device outputs except TDO.

## JTAG AC Electrical Characteristics<sup>(1,2,3,4)</sup>

| Symbol            | Parameter               | 70V3599/89 |                  |       |
|-------------------|-------------------------|------------|------------------|-------|
|                   |                         | Min.       | Max.             | Units |
| t <sub>JCYC</sub> | JTAG Clock Input Period | 100        | —                | ns    |
| t <sub>JCH</sub>  | JTAG Clock HIGH         | 40         | —                | ns    |
| t <sub>JCL</sub>  | JTAG Clock Low          | 40         | —                | ns    |
| t <sub>JR</sub>   | JTAG Clock Rise Time    | —          | 3 <sup>(1)</sup> | ns    |
| t <sub>JF</sub>   | JTAG Clock Fall Time    | —          | 3 <sup>(1)</sup> | ns    |
| t <sub>JRST</sub> | JTAG Reset              | 50         | —                | ns    |
| t <sub>JRSR</sub> | JTAG Reset Recovery     | 50         | —                | ns    |
| t <sub>JCD</sub>  | JTAG Data Output        | —          | 25               | ns    |
| t <sub>JDC</sub>  | JTAG Data Output Hold   | 0          | —                | ns    |
| t <sub>JST</sub>  | JTAG Setup              | 15         | —                | ns    |
| t <sub>JH</sub>   | JTAG Hold               | 15         | —                | ns    |

5617 tbl 12

**NOTES:**

1. Guaranteed by design.
2. 30pF loading on external output signals.
3. Refer to AC Electrical Test Conditions stated earlier in this document.
4. JTAG operations occur at one speed (10MHz). The base device may run at any speed specified in this datasheet.

## Identification Register Definitions

| Instruction Field                 | Value                 | Description  |
|-----------------------------------|-----------------------|--|
| Revision Number (31:28)           | 0x0                   | Reserved for version number                          |
| IDT Device ID (27:12)             | 0x0312 <sup>(1)</sup> | Defines IDT part number                              |
| IDT JEDEC ID (11:1)               | 0x33                  | Allows unique identification of device vendor as IDT |
| ID Register Indicator Bit (Bit 0) | 1                     | Indicates the presence of an ID register             |

5617 tbl 13

### NOTE:

1. Device ID for IDT70V3589 is 0x0313.

## Scan Register Sizes

| Register Name        | Bit Size |
|----------------------|----------|
| Instruction (IR)     | 4        |
| Bypass (BYR)         | 1        |
| Identification (IDR) | 32       |
| Boundary Scan (BSR)  | Note (3) |

5617 tbl 14

## System Interface Parameters


| Instruction    | Code            | Description  |
|----------------|-----------------|--|
| EXTEST         | 0000            | Forces contents of the boundary scan cells onto the device outputs <sup>(1)</sup> . Places the boundary scan register (BSR) between TDI and TDO.   |
| BYPASS         | 1111            | Places the bypass register (BYR) between TDI and TDO.  |
| IDCODE         | 0010            | Loads the ID register (IDR) with the vendor ID code and places the register between TDI and TDO.   |
| HIGHZ          | 0011            | Places the bypass register (BYR) between TDI and TDO. Forces all device output drivers to a High-Z state.  |
| SAMPLE/PRELOAD | 0001            | Places the boundary scan register (BSR) between TDI and TDO. SAMPLE allows data from device inputs <sup>(2)</sup> to be captured in the boundary scan cells and shifted serially through TDO. PRELOAD allows data to be input serially into the boundary scan cells via the TDI. |
| RESERVED       | All other codes | Several combinations are reserved. Do not use codes other than those identified above.   |

5617 tbl 15

### NOTES:

1. Device outputs = All device outputs except TDO.
2. Device inputs = All device inputs except TDI, TMS, and  $\overline{\text{TRST}}$ .
3. The Boundary Scan Descriptive Language (BSDL) file for this device is available on the IDT website ([www.idt.com](http://www.idt.com)), or by contacting your local IDT sales representative.

## Ordering Information

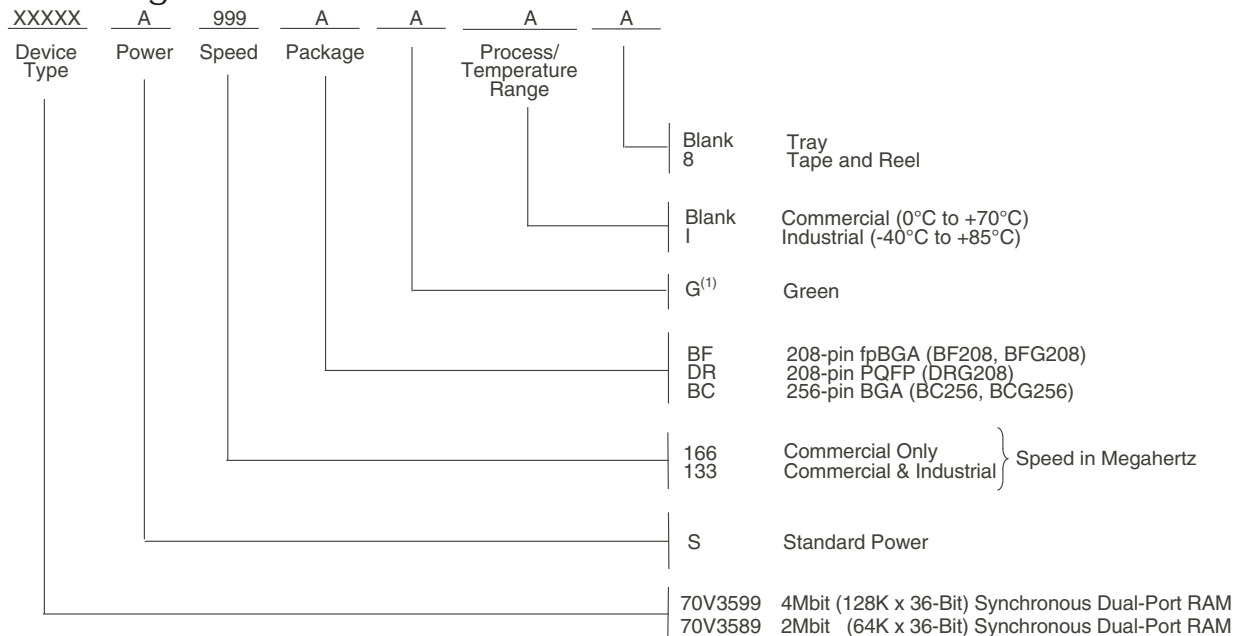

5617 drw 22

## NOTE:

1. Green parts available. For specific speeds, packages and powers contact your local sales office.

LEAD FINISH (containing SnPb) are obsolete excluding BGA and Hermetic packages.

Note; the information regarding recently obsoleted parts is included in this datasheet for customer convenience. Please see the Orderable Parts Table for the current, active part list.

## ORDERABLE PART INFORMATION

| Speed (MHz)     | Orderable Part ID | Pkg. Code     | Pkg. Type | Temp. Grade |
|-----------------|-------------------|---------------|-----------|-------------|
| 133             | 70V3599S133BC     | BC256         | CABGA     | C           |
|                 | 70V3599S133BC8    | BC256         | CABGA     | C           |
|                 | 70V3599S133BCGI   | BCG256        | CABGA     | I           |
|                 | 70V3599S133BCI    | BC256         | CABGA     | I           |
|                 | 70V3599S133BCI8   | BC256         | CABGA     | I           |
|                 | 70V3599S133BF     | BF208         | CABGA     | C           |
|                 | 70V3599S133BF8    | BF208         | CABGA     | C           |
|                 | 70V3599S133BFI    | BF208         | CABGA     | I           |
|                 | 70V3599S133BFI8   | BF208         | CABGA     | I           |
|                 | 70V3599S133BFGI   | BFG208        | CABGA     | I           |
|                 | 70V3599S133BFGI8  | BFG208        | CABGA     | I           |
|                 | 70V3599S133DRGI   | DRG208        | PQFP      | I           |
|                 | 166               | 70V3599S166BC | BC256     | CABGA       |
| 70V3599S166BC8  |                   | BC256         | CABGA     | C           |
| 70V3599S166BCG  |                   | BCG256        | CABGA     | C           |
| 70V3599S166BF   |                   | BF208         | CABGA     | C           |
| 70V3599S166BF8  |                   | BF208         | CABGA     | C           |
| 70V3599S166BFG  |                   | BFG208        | CABGA     | C           |
| 70V3599S166BFG8 |                   | BFG208        | CABGA     | C           |
| 70V3599S166DRG  |                   | DRG208        | PQFP      | C           |

| Speed (MHz)     | Orderable Part ID | Pkg. Code     | Pkg. Type | Temp. Grade |
|-----------------|-------------------|---------------|-----------|-------------|
| 133             | 70V3589S133BC     | BC256         | CABGA     | C           |
|                 | 70V3589S133BC8    | BC256         | CABGA     | C           |
|                 | 70V3589S133BCI    | BC256         | CABGA     | I           |
|                 | 70V3589S133BCI8   | BC256         | CABGA     | I           |
|                 | 70V3589S133BF     | BF208         | CABGA     | C           |
|                 | 70V3589S133BF8    | BF208         | CABGA     | C           |
|                 | 70V3589S133BFI    | BF208         | CABGA     | I           |
|                 | 70V3589S133BFI8   | BF208         | CABGA     | I           |
|                 | 70V3589S133DRG    | DRG208        | PQFP      | C           |
|                 | 70V3589S133DRGI   | DRG208        | PQFP      | I           |
|                 | 166               | 70V3589S166BC | BC256     | CABGA       |
| 70V3589S166BC8  |                   | BC256         | CABGA     | C           |
| 70V3589S166BCG  |                   | BCG256        | CABGA     | C           |
| 70V3589S166BF   |                   | BF208         | CABGA     | C           |
| 70V3589S166BF8  |                   | BF208         | CABGA     | C           |
| 70V3589S166BFG  |                   | BFG208        | CABGA     | C           |
| 70V3589S166BFG8 |                   | BFG208        | CABGA     | C           |

## Datasheet Document History:

|           |                |   |
|-----------|----------------|---|
| 06/02/00: |                | Initial Public Offering   |
| 07/12/00: |                | Added mux to functional block diagram   |
| 07/30/01: | Page 20        | Changed maximum value for JTAG AC Electrical Characteristics for $t_{CD}$ from 20ns to 25ns   |
|           | Page 9         | Added Industrial Temperature DC Parameters  |
| 11/20/01: | Pages 2, 3 & 4 | Added date revision for pin configurations  |
|           | Page 11        | Changed to $t_{OE}$ value in AC Electrical Characteristics, please refer to Errata #SMEN-01-05  |
|           | Pages 1 & 22   | Replaced $\text{TM}$ logo with $\text{®}$ logo  |
|           | Page 10        | Changed AC Test Conditions Input Rise/Fall Times  |
| 07/01/02: |                | Consolidated multiple devices into one datasheet  |
|           | Pages 1 & 5    | Added DCD capability for Pipelined Outputs  |
|           | Page 7         | Clarified $T_{BIAS}$ and added $T_{JN}$   |
|           | Page 9         | Changed DC Electrical Parameters  |
|           | Page 11        | Removed Clock Rise & Fall Time from AC Electrical Characteristics Table   |
|           |                | Removed Preliminary status  |
| 05/19/03: | Page 11        | Added Byte Enable Setup Time & Byte Enable Hold Time to AC Electrical Characteristics Table   |
|           | Page 22        | Added IDT Clock Solution Table  |
| 01/10/06: | Page 1         | Added green availability to features  |
|           | Page 5         | Changed footnote 2 for Truth Table I from $\overline{ADS}$ , $\overline{CNTEN}$ , $\overline{REPEAT} = V_{IH}$ to $\overline{ADS}$ , $\overline{CNTEN}$ , $\overline{REPEAT} = X$                                   |
|           | Page 22        | Added green indicator to ordering information   |
| 07/25/08: | Page 9         | Corrected a typo in the DC Chars table  |
| 01/19/09: | Page 22        | Removed "IDT" from orderable part number  |
| 07/26/10: | Page 11        | In order to correct the header notes of the AC Elect Chars Table and align them with the Industrial temp range values located in the table, the commercial TA header note has been removed                          |
|           | Pages 13-16    | In order to correct the footnotes of timing diagrams, $\overline{CNTEN}$ has been removed to reconcile the footnotes with the $\overline{CNTEN}$ logic definition found in Truth Table II - Address Counter Control |
| 10/14/14: | Page 22        | Added Tape & Reel to Ordering Information   |
| 06/21/18: |                | Product Discontinuation Notice - PDN# SP-17-02  |
|           |                | Last time buy expires June 15, 2018   |
| 03/07/19: | Pages 1, 22    | Added orderable part information table. Updated EOL note to obsolete status.  |
| 11/05/19: | Pages 2 - 4    | Updated package codes   |
|           | Page 4         | Rotated DRG208 TQFP pin configuration to accurately reflect pin 1 orientation   |
|           | Page 23        | Deleted IDT Clock Solution table  |
| 02/03/20: | Pages 1 - 24   | Rebranded as Renesas datasheet  |
|           | Page 22        | Corrected "ns" to "MHz" in the header of the Orderable Part Information tables  |

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.