


Surface Mount Bandpass Filter

BPF-A950+

50Ω 700 to 1200 MHz

The Big Deal

- Wide bandwidth
- Better rejection
- Miniature shielded package



Generic photo used for illustration purposes only
CASE STYLE: HQ1157

Product Overview

The BPF-A950+ is a 50Ω bandpass filter fabricated using SMT technology. This bandpass filter covers from 700-1200 MHz. This filter is built with high Q capacitors and air-coil inductors for superior performance. This filter is developed for square kilometer array telescope systems for radio astronomy. It has repeatable performance across lots and consistent performance across temperature.

Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications such as radio astronomy.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics for broad frequency band.
Shielded case	Reduced interference with and from the surrounding components.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Bandpass Filter

50Ω 700 to 1200 MHz

BPF-A950+



Generic photo used for illustration purposes only
CASE STYLE: HQ1157


Features

- Wide bandwidth
- Better rejection
- Miniature shielded package


Applications

- Radio telescope applications
- Aeronautical radio navigation
- Defense systems
- Private and public land mobile

Functional Schematic

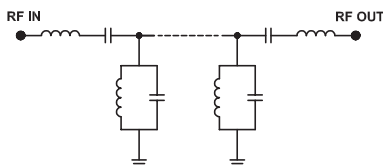

Typical Frequency Response



Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	950	—	MHz
	Insertion Loss	F1-F2	—	2.0	4.0	dB
	VSWR	F1-F2	—	1.5	1.9	:1
Stop Band, Lower	Insertion Loss	DC-F3	20	30	—	dB
	VSWR	DC-F3	—	11	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	20	30	—	dB
	VSWR	F4-F5	—	11	—	:1

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W





Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
10	105.32	1737.18	700	7.29
450	58.94	86.86	730	5.47
620	30.79	28.96	760	4.31
645	15.97	14.87	790	3.68
660	7.94	6.15	810	3.41
670	4.11	2.87	830	3.21
680	2.26	1.56	850	3.06
700	1.43	1.14	880	2.88
810	0.96	1.14	910	2.77
950	1.04	1.33	930	2.72
1140	1.43	1.24	950	2.69
1200	2.21	1.30	980	2.69
1230	5.35	2.50	1010	2.73
1245	10.85	5.72	1040	2.81
1270	23.00	11.93	1070	2.94
1310	49.59	17.22	1100	3.16
1350	42.70	19.54	1130	3.51
1900	53.32	19.76	1160	4.12
2500	61.18	22.29	1180	4.80
2600	60.54	21.20	1200	5.71

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

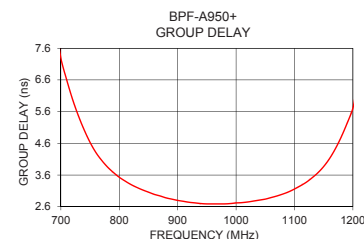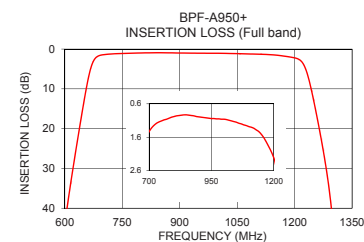

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV.B
M174392
BPF-A950+
EDU1655
URJ
190627
Page 2 of 3

Pad Connections

INPUT	1
OUTPUT	8
GROUND	2-7,9-14

Demo Board MCL P/N: TB-363+
Suggested PCB Layout (PL-227)

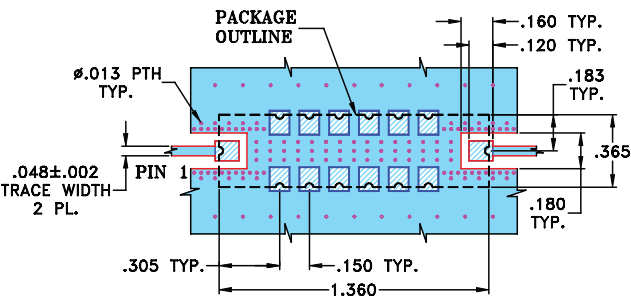


- NOTE:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

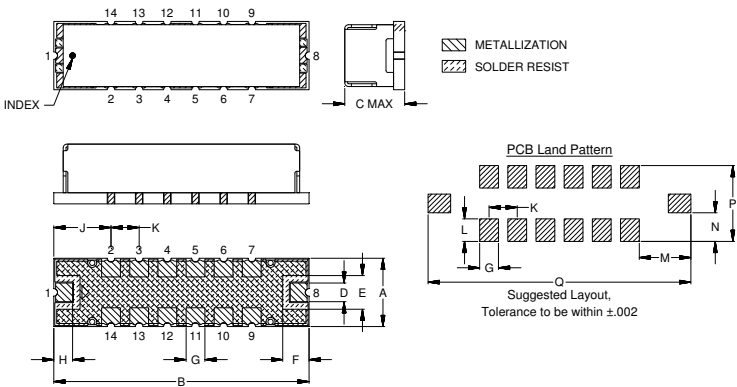

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.365	1.360	.35	.100	.180	.140	.100	.100
9.27	34.54	8.89	2.54	4.57	3.56	2.54	2.54
J	K	L	M	N	P	Q	Wt.
.305	.150	.120	.275	.152	.405	1.400	grams
7.75	3.81	3.05	6.99	3.86	10.29	35.56	4.0

Note: Please refer to case style drawing for details

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp