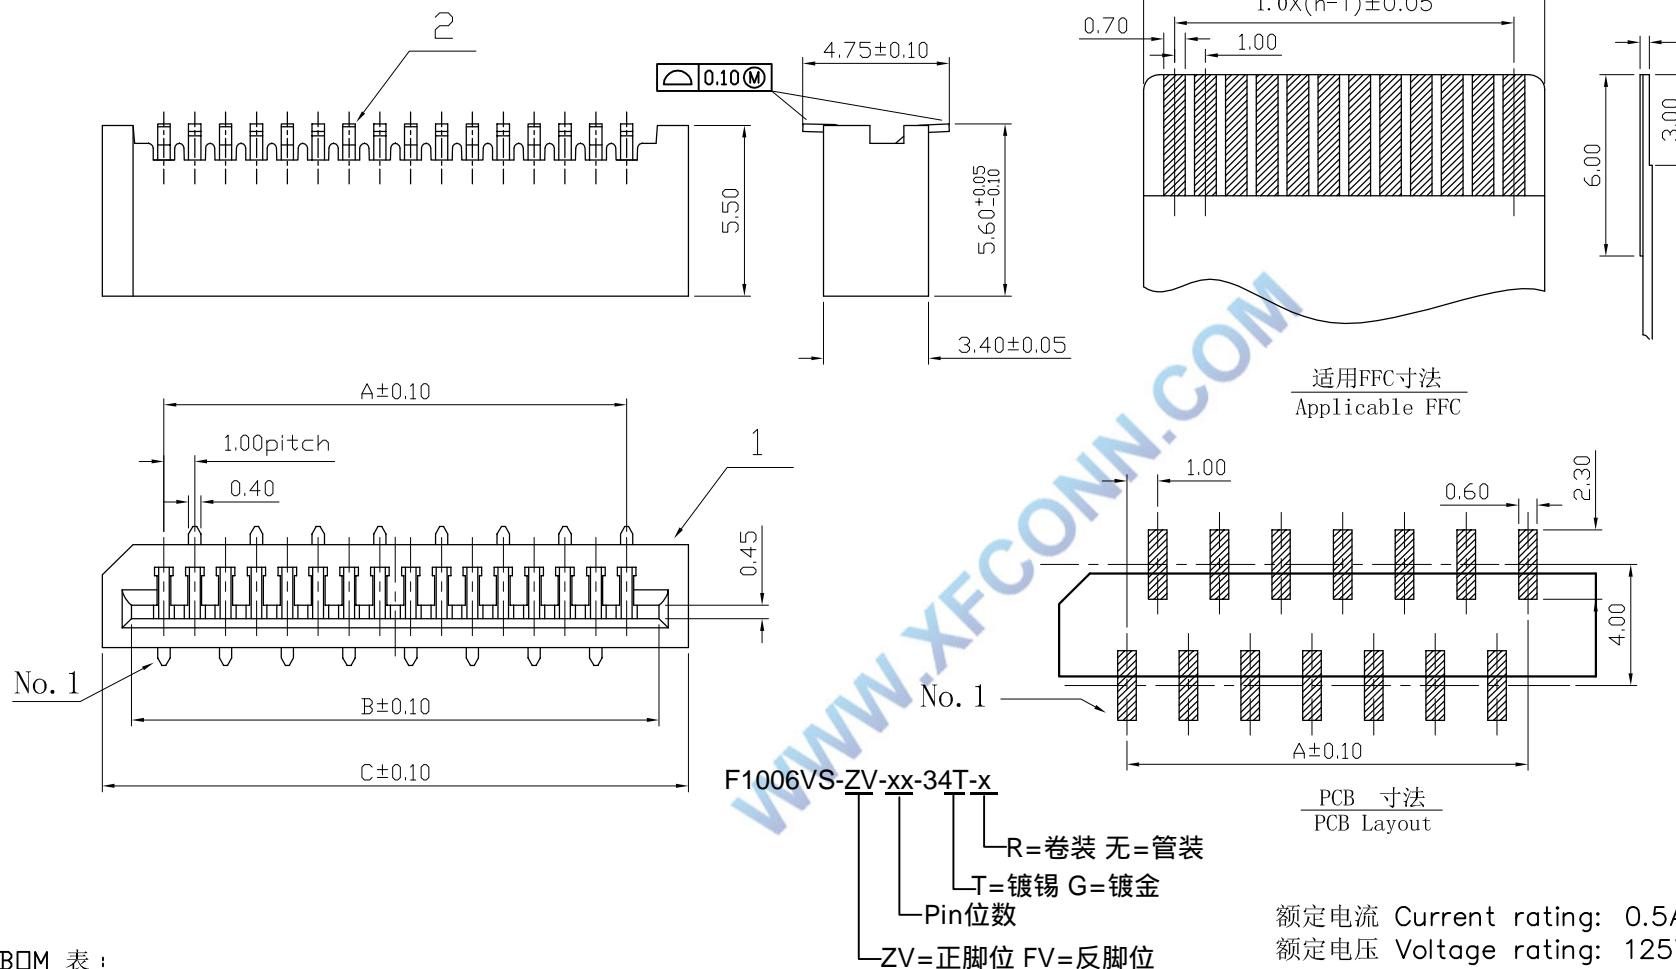

TABLE

N	A	B	C
4	3	5.1	7.0
5	4	6.1	8.0
6	5	7.1	9.0
7	6	8.1	10.0
8	7	9.1	11.0
9	8	10.1	12.0
10	9	11.1	13.0
11	10	12.1	14.0
12	11	13.1	15.0
13	12	14.1	16.0
14	13	15.1	17.0
15	14	16.1	18.0
16	15	17.1	19.0
17	16	18.1	20.0
18	17	19.1	21.0
19	18	20.1	22.0
20	19	21.1	23.0
21	20	22.1	24.0
22	21	23.1	25.0
23	22	24.1	26.0
24	23	25.1	27.0
25	24	26.1	28.0
26	25	27.1	29.0
27	26	28.1	30.0
28	27	29.1	31.0
29	30	30.1	32.0
30	29	31.1	33.0
31	30	32.1	34.0
32	31	33.1	35.0
33	32	34.1	36.0
34	33	35.1	37.0
35	34	36.1	38.0



BOM 表：

2	1.0mm间距B型单面接立式-PIN		PhosphorBronze T=0.25MM	镀锡	1SET	1Set = N POS	
1	1.0mm间距B型单面接-基座		SEE TABLE SEE TABLE 1	本色	1 PCS		
序号	品 名	料 号	材料规格	电镀方式/颜色	使用数量	备 注	版本

额定电流 Current rating: 0.5A

额定电压 Voltage rating: 125V

耐 电 压 Withstand voltage: 500V AC/minute

接触电阻 Contact resistance : $\leq 30\text{m}\Omega$

绝缘电阻 Insulation resistance: 500MΩ

工作温度 Working temperature: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

				TOLERANCE UNLESS OTHERWISE	DRAWN	CK tan	XFCN 兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
G				X. ± 0.30	X° . $\pm 5^\circ$	CHKD			DATE	2010. 4. 12 G
				. X ± 0.20	. X° $\pm 2^\circ$	APPD	PRODUCT NAME	FPC 1.00mm Connectors		
				. XX ± 0.08	. XX° $\pm 1^\circ$	UNITS	mm			
				A0	XXX ± 0.03	XXX° $\pm 0.5^\circ$	VIEW	PART. NO.	F1006VS-ZV-xx-34T	
VER	MODIFICATION		DRAW	DATE	SCALE	1:1				
1	2	3	4	5	6	7	8	9	DWG NO.	009