


Description

The ESD5Z3.3T1G-CN is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in cellular phones, portable devices, digital cameras, power supplies and many other portable applications.

Package outline



Features

- IEC61000-4-2 Level 4 ESD protection
- IEC61000-4-4 Level 4 EFT Protection
- ESD Rating of Class 3(>16kV) per Human Body Model
- 240 Watts Peak Pulse Power per (tp=8/20us)
- Low clamping voltage
- Stand-off voltages: 2.5V to 12V
- Low leakage current
- Response Time is Typically <1ns

Pin Configuration



Mechanical Data

- SOD-523 Package
- Flammability Rating: UL 94V-0
- High temperature soldering guaranteed: 260°C/10s
- Device Meets MSL 1 Requirements

ABSOLUTE MAXIMUM RATING


Parameters	Symbol	Value	Unit
ESD per IEC61000-4-2(Air)	V _{ESD}	±30	kV
ESD per IEC61000-4-2(Contact)			
IEC 61000-4-4(EFT)		40	A
ESD Voltage	Per Human Body Model	16	kV
	Per Machine Model	400	v
Total Power Dissipation on FR-5 Board (note 1)@Ta=25°C	P _{PP}	200	W
Operating temperature	T _{OPT}	-55-+150	°C
Storage temperature range	T _{STG}	-55-+150	°C
Lead Soldering temperature-Maximum (10 second Duration)	T _L	260(10 sec.)	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. FR-5=1.0 x 0.75 x 0.62 in.

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

Symbol	Parameter
I _{PP}	Maximum Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{pp}
V _{RWM}	Working Peak Reverse Voltage
I _R	Maximum Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage@ I _T
I _T	Test Current
I _F	Forward Current
V _F	Forward Voltage @ I _F
P _{PK}	Peak Power Dissipation
C	Max. Capacitance @ VR=0 and f=1MHZ

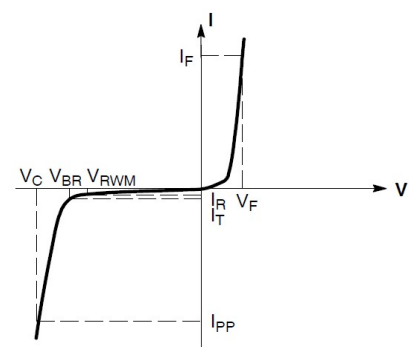

Uni-Directional TVS

Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9\text{V}$ Max. @ $I_F = 10\text{mA}$ for all types).

DEVICE	DEVICE MARKING	VRWM (V) (max.)	IR(μA) @VRWM (max.)	VBR(V) @IT(note2) (min.)	IT (mA)	Vc@5A (V) (Typ.)	Vc (V) (max.) (@A)	Ppk (W) (max.)	C (pF) (Typ.)
ESD5Z3.3T1G-CN	ZE	3.3	0.05	5.0	1.0	8.4	14.1 11.2	158	105

Surge current waveform per Figure 1.


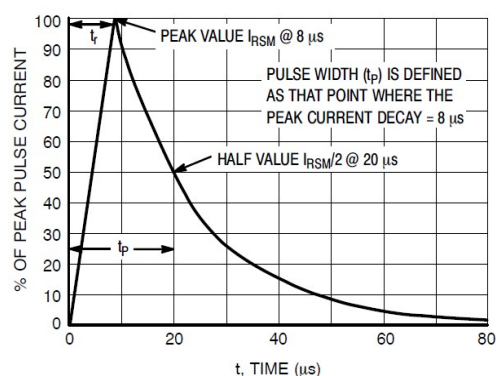



Figure 1. 8 x 20 μs Pulse Waveform

SOD-523 PACKAGE OUTLINE Plastic surface mounted package

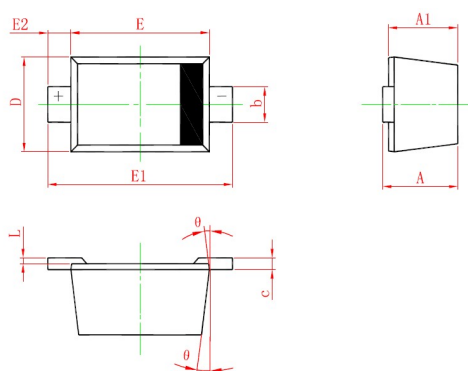

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.031
A1	0.500	0.700	0.020	0.028
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	0.750	0.850	0.030	0.033
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.200 REF		0.008 REF	
L	0.010	0.070	0.001	0.003
θ	7° REF		7° REF	

SOD-523 Suggested Pad Layout



Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。