

### **Transient Voltage Suppressors**

# **General Description**


The ESD3Z6.0C is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

### **FEATURES**

- ♦IEC61000-4-2Level4ESDprotection
- ♦IEC61000-4-4 Level 4 EFT Protection
- ♦ESD Rating of Class 3(>16kV) per Human Body Model
- ♦200 Watts Peak Pulse Power per (tp=8/20us)
- ♦Low clamping voltage
- ♦Low leakage current
- ♦Response Time is Typically <1ns

#### **Mechanical Data**

- ♦SOD-323 Package
- ♦Flammability Rating: UL 94V-0
- ♦High temperature soldering guaranteed: 260°C/10s

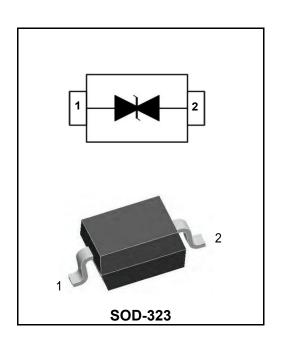

### **ABSOLUTE MAXIMUM RATING**

Parameters		Symbol	Value	Unit	
ESD per IEC61000-4-2(Air)		Vesd	±15	kV	
ESD per IEC61000-4-2(Contact)			±8		
Electrostatic Discharge IEC 61000-4-4(EFT)			40	Α	
ESD Voltage	Per Human Body Model		16	KV	
	Per Machine Model		400	V	
Total Power Dissipation on FR-5 Board (note 1)@Ta=25℃		P <sub>PP</sub>	200	w	
Maximum Junction temperature		TJ	150	೦	
Operati ng temperature		T <sub>OPT</sub>	-40-+150	င	
Storage temperature range		T <sub>STG</sub>	-55-+150	°C	
Lead Soldering Temperature-Maximum (10 second Duration)		TL	260(10 sec.)	°C	

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

# Electrical Characteristics (Ratings at 25℃ ambient temperature unless otherwise specified).

Symbol	Parameter	. *'
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current	l pp
<b>V</b> c	Clamping Voltage @ IPP	
V <sub>RWM</sub>	Working Peak Reverse Voltage	V <sub>BR</sub> V <sub>RWM</sub>   <sub>R</sub>   T   V   V   V   V   V   V   V   V   V
I <sub>R</sub>	Maximum Reverse Leakage Current @ VRWM	17 17
<b>V</b> <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>	
Ι <sub>τ</sub>	Test Current	   <sub>PP</sub>



### **Electrical Characteristics**

Ta= 25℃ unless otherwise noted, VF=0.9V Max.@ IF=10mA for all types).

PART NUMBER	MARKING	V <sub>RWM</sub> (V)	I <sub>R(uA)</sub> <sub>@</sub> V <sub>RWM</sub>		BR(V) T(note2)	I <sub>T</sub> (mA)	V <sub>c@IPP=5A</sub> (V)	V <sub>C(V)</sub> (Note1) @Max I <sub>PP</sub>	I <sub>PP(A)</sub> (Note1)	P <sub>pk</sub> (W)	C (pF)
		(max.)	Max	Min	Max		Тур.	Max	Max	Max	Тур
ESD3Z6.0C	6C	6.0	1.0	6.2	8.0	1	12.4	20.5	8.8	65	70

#### Note:

- 1. Surge current waveform per Figure 1.
- 2. VBR is measured with a pulse test current IT at an ambient temperature of 25  $^{\circ}\mathrm{C}$

### **ELECTRICAL CHARACTERISTICS CURVES**

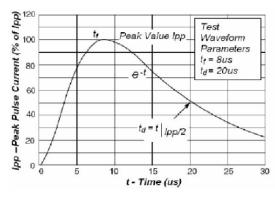


Fig1. Pulse Waveform

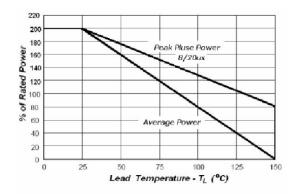


Fig2. Power Derating




# **Ordering information**


Package	Packing Description	Packing Quantity			
SOD-323	Tape/Reel,7"reel	3000PCS/Reel 120000PCS/Carton			

## **Package Dimensions**

## **SOD-323**

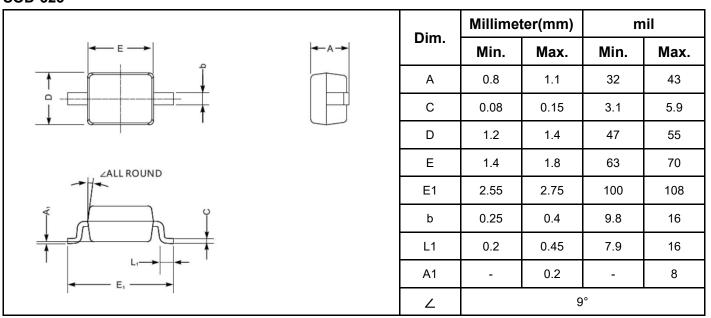

# The recommended mounting pad size

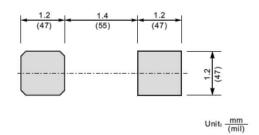



# **Disclaimer**

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices),YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <a href="https://www.yfwdiode.com">https://www.yfwdiode.com</a>, or consult YFW sales office for further assistance.