
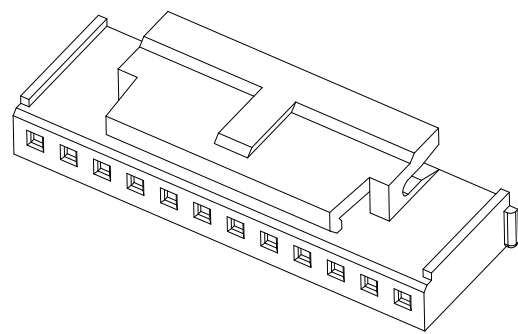


1 2 3 4 5 6 7 8


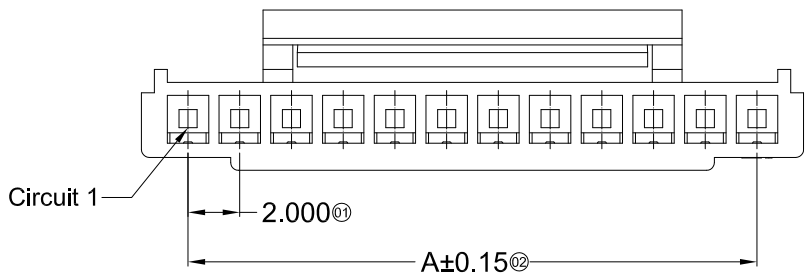


- Specifications :**
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1000V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤30mΩ
 - After environmental testing: ≤40mΩ


X2011 H X-XX A-N0 XX XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No.: XX-02P~16P
- ⑤ Plug the Pin & Special No.: A-With Lock
- ⑥ Material : N0-PA66 UL 94V-0
- ⑦ Color : Blank-Natural Color
BK-Black
- ⑧ Whether containing halogen:
HF-Halogen free
Blank-Containing halogen

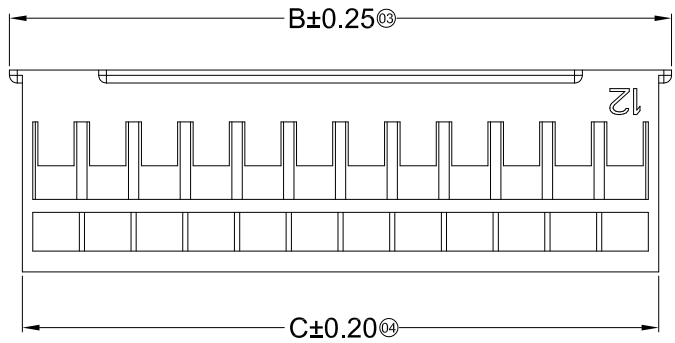


03P~16P Shape
Scale 1:1



2P Shape
Scale 1:1

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	5.60	4.60	10	18.00	21.60	20.60
03	4.00	7.60	6.60	11	20.00	23.60	22.60
04	6.00	9.60	8.60	12	22.00	25.60	24.60
05	8.00	11.60	10.60	13	24.00	27.60	26.60
06	10.00	13.60	12.60	14	26.00	29.60	28.60
07	12.00	15.60	14.60	15	28.00	31.60	30.60
08	14.00	17.60	16.60	16	30.00	33.60	32.60
09	16.00	19.60	18.60				

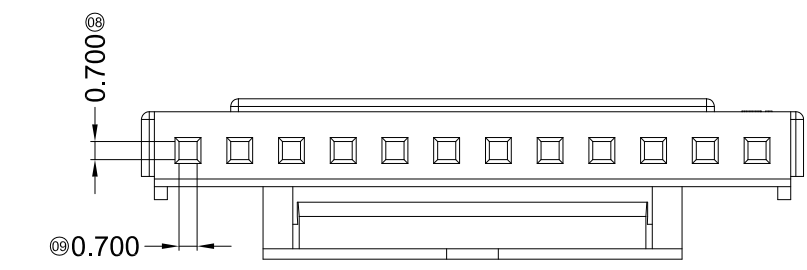

X2011H-XXA-N0BK	PA 66 UL 94V-0 Black	X2011T-A	X2011W -A
X2011H-XXA-N0	PA 66 UL 94V-0		
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

△ X					ANGULAR	±5°	DSND		DATE	SCALE: N/A	MODEL TYPE: X2011H-XXA-N0
△ X					L ≤ 4	±0.2	DWN		DATE	VIEW:	PART NO.:
△ X					4 < L ≤ 16	±0.3	CHKD		DATE	UNIT: mm	2.00mm Crimp Style Connector
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4	APPD		DATE	SIZE: A4	DWG NO.:
					L > 63	±0.5					WEIGHT
					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO., LIMITED				SHEET
											1.0g
											1/1
											REVISION
											A0

1 2 3 4 5 6 7 8